



POLARIS®

2019
OWNER'S MANUAL

800 INDY XC 129
600 INDY XC 129
600 INDY SP



WARNING

Read, understand, and follow all of the instructions and safety precautions in this manual and on all product labels.

Failure to follow the safety precautions could result in serious injury or death.



WARNING

Operating, servicing, and maintaining a passenger vehicle or off-road vehicle can expose you to chemicals including engine exhaust, carbon monoxide, phthalates, and lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. To minimize exposure, avoid breathing exhaust, do not idle the engine except as necessary, service your vehicle in a well-ventilated area and wear gloves or wash your hands frequently when servicing your vehicle.

For more information go to www.P65Warnings.ca.gov/passenger-vehicle.



For videos and more information about a safe riding experience with your Polaris vehicle, scan this QR code with your smartphone.



2019 Owner's Manual

800 INDY XC 129 ES
600 INDY SP 129 ES
600 INDY XC 129 SC Select
800 INDY XC 129 SC Select
600 INDY XC 129 ES INTL SC

POLARIS® and INDY® are trademarks of POLARIS Industries Inc.

Copyright 2018 Polaris Industries Inc. All information contained within this publication is based on the latest product information at the time of publication. Due to constant improvements in the design and quality of production components, some minor discrepancies may result between the actual vehicle and the information presented in this publication. Depictions and/or procedures in this publication are intended for reference use only. No liability can be accepted for omissions or inaccuracies. Any reprinting or reuse of the depictions and/or procedures contained within, whether whole or in part, is expressly prohibited.

The original instructions for this vehicle are in English. Other languages are provided as translations of the original instructions.

Printed in U.S.A.

2019 Owner's Manual

9928880



Thank you for purchasing a POLARIS vehicle, and welcome to our world-wide family of POLARIS enthusiasts. Be sure to visit us online at www.polaris.com for the latest news, new product introductions, upcoming events, career opportunities and more.

Here at POLARIS we proudly produce an exciting line of utility and recreational products. We believe POLARIS sets a standard of excellence for all utility and recreational vehicles manufactured in the world today. Many years of experience have gone into the engineering, design, and development of your POLARIS vehicle, making it the finest machine we've ever produced.

- Snowmobiles
- SPORTSMAN® All-terrain vehicles
- Low emission vehicles (LEVs)
- *RANGER*® utility vehicles
- BRUTUS® work vehicles
- SLINGSHOT® three wheel motorcycles
- RZR® sport vehicles
- GEM® vehicles
- INDIAN® motorcycles
- POLARIS POWER® generators
- POLARIS DEFENSE® combat vehicles
- Timbersled® Snow Bikes

For safe and enjoyable operation of your vehicle, be sure to follow the instructions and recommendations in this owner's manual. Your manual contains instructions for minor maintenance, but information about major repairs is outlined in the POLARIS Service Manual and can be performed by a factory certified Master Service Dealer® (MSD) technician.

Your POLARIS dealer knows your vehicle best and is interested in your total satisfaction. Your POLARIS dealership can perform all of your service needs during, and after, the warranty period.

SAFETY SYMBOLS AND SIGNAL WORDS

The following signal words and symbols appear throughout this manual and on your vehicle. Your safety is involved when these words and symbols are used. Become familiar with their meanings before reading the manual.

DANGER

DANGER indicates a hazardous situation which, if not avoided, **WILL** result in death or serious injury.

WARNING

SAFETY ALERT WARNING indicates a hazardous situation which, if not avoided, **COULD** result in serious injury.

CAUTION

SAFETY ALERT CAUTION indicates a hazardous situation which, if not avoided, **COULD** result in minor to moderate injury.

CAUTION

CAUTION indicates special precautions that must be taken to avoid vehicle damage or property damage.

IMPORTANT

IMPORTANT provides key reminders during disassembly, assembly, and inspection of components.

NOTICE

NOTICE provides key information by clarifying instructions.



The Prohibition Safety Sign indicates an action **NOT** to take in order to avoid a hazard.



The Mandatory Action Sign indicates an action that **NEEDS** to be taken to avoid a hazard.

Introduction	7
Safety	11
Features.	31
Gauge	41
The Perfect Fit	65
Pre-Ride Inspections	81
Operation	87
Maintenance	97
Specifications	139
Troubleshooting	149
Warranty	159
Maintenance Log	169

INTRODUCTION

IMPORTANT NOTES FOR OWNERS AND DRIVERS

After reading this manual, store it in the snowmobile for convenient reference. It should remain with the snowmobile when the snowmobile is sold.

Some of the illustrations and photos used in this manual are general representations. Your model may differ.

Follow the maintenance program outlined in this manual. Preventive maintenance ensures that critical components of the snowmobile are inspected at specific mileage intervals. This service can be performed by your authorized POLARIS dealer.

You and your dealer must complete the registration form included with your snowmobile and forward it to us. This completed form is necessary to ensure warranty coverage.

Protect and preserve your right to ride by joining your local trail riding clubs.

When teaching inexperienced operators to ride, set up a predetermined course for practice. Make sure they know how to drive and control the snowmobile before allowing them to make longer trips. Teach them proper snowmobile courtesy, and enroll them in driver's training and safety courses sponsored by local or state organizations.

INTRODUCTION

PRESERVATION OF THE ENVIRONMENT

POLARIS is committed to supporting an environmental education campaign. We encourage state and provincial governments across the snowbelt to adopt rigorous safety training programs that encourage protection of our environment, including wildlife and vegetation.

Snowmobile clubs and other organizations are working together to protect our environment. Please support their efforts and operate your snowmobile with consideration for the protection and preservation of our environment.

NOISE LEVEL

One of the most publicized issues about snowmobiles is noise. The Society of Automotive Engineers (SAE), the standard-setting body for snowmobile development, recommends that snowmobiles conform to prescribed sound levels.

POLARIS snowmobiles are engineered to conform to these SAE standards. Our muffler systems are designed to reduce noise levels and must not be altered or removed. The sound of your snowmobile may not be welcome to non-snowmobilers, so you have a responsibility to operate your snowmobile with concern for others. We do our part by manufacturing quieter machines; we ask your help to further reduce the impact of noise by operating your snowmobile safely and responsibly.

AIR POLLUTION

POLARIS engineers continuously investigate ways to reduce emission levels of two-stroke engines. We expect our efforts to lead to the reduction of potential air pollution.

In addition to our technological research, we encourage government agencies, manufacturers, distributors, dealers, ecologists, and other interested parties to work together to develop data on environmental topics.


VEHICLE IDENTIFICATION NUMBERS

Record your snowmobile's identification numbers and key number in the spaces provided.

NOTICE

If installing an aftermarket tunnel wrap, do not cover the tunnel certification, tunnel VIN or emissions certification labels with the wrap. If the tunnel wrap doesn't provide an opening for these labels, remove the section of wrap where the labels are located.

- ① Certification Label
- ② Tunnel VIN
- ③ Emission Certification Label

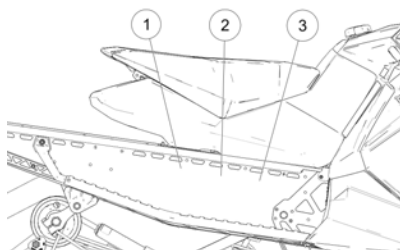


VEHICLE MODEL NUMBER:	
TUNNEL VIN (RIGHT SIDE OF TUNNEL):	
ENGINE SERIAL NUMBER (ON RECOIL HOUSING):	
KEY NUMBER:	

INTRODUCTION

ENGINE SERIAL NUMBER

The engine serial number ① is located on the identification label on the engine recoil cover.



KEY IDENTIFICATION

The ignition keys are etched with an identification number. Remove the spare key and store it in a safe place. Your key can be duplicated only by mating a POLARIS key blank using the same identification number with one of your existing keys, so if both keys are lost, the ignition switch assembly must be replaced.



SAFETY

OPERATOR SAFETY

Follow the recommended maintenance program beginning on page 98 of this manual to ensure that all critical components on the snowmobile are thoroughly inspected at specific mileage intervals. Your dealer can perform this service.

WARNING

Driving a snowmobile requires your full attention. DO NOT drink alcohol or use drugs or medications before or while driving or riding as a passenger. They will reduce your alertness and slow your reaction time.

Snowmobiles are capable of traveling at high speeds. Use extra caution to ensure operator safety. Make sure your snowmobile is in excellent operating condition at all times. Always check major and vital safety components before every ride.

All POLARIS snowmobiles are designed and tested to provide safe operation when used as directed. Failure of critical machine components may result from operation with any modifications, especially those that increase speed or power. DO NOT MODIFY YOUR MACHINE. The snowmobile may become aerodynamically unstable at speeds higher than those for which it is designed. Loss of control may occur at higher speeds. Modifications may also create a safety hazard and lead to bodily injury.

The warranty on your entire machine is terminated if any equipment has been added, or any modifications have been made, to increase the speed or power of the snowmobile.

SAFETY

STAY CLEAR OF TRACK

Your snowmobile is propelled by a revolving track that must be partially exposed for proper operation. Do not stand on the plastic flap.

WARNING

Serious injuries may result if hands, feet, or clothing become entangled in the track. Be alert when riding, and remain properly seated to stay clear of the track. Never hold the snowmobile up or stand behind it while warming up the track. A loose track or flying debris could cause serious injury or death. We recommend having your dealer perform all track service and alignment procedures.

STAY CLEAR OF ENGINE

Never attempt adjustments with the engine running. Turn off the ignition, open the side panels or hood, make the adjustment, secure shields and guards, secure the side panels and hood, and then restart the engine to check its operation.

WARNING

Serious injury can occur if fingers or clothing contact the moving parts of an engine. Always stop the engine before attempting adjustments.

RIDING POSITION

Operating a snowmobile requires skill and balance for proper control. Rider positions may vary with experience and the features available on some snowmobiles, but under many conditions, the proper position is to be seated with both feet on the running boards and both hands on the handlebar grips for proper throttle, brake and steering control.

WARNING

Improper riding position may reduce control and could result in serious injury or death. Always ride in a position that allows for control of your vehicle.

RIDER CAPACITY

Some POLARIS snowmobiles are designed for a single rider only, while some are designed for up to two riders. A safety label on the vehicle indicates whether the vehicle is designed for a single rider or for two riders.

RIDING APPAREL


HELMET

Wearing a helmet can prevent a severe head injury. Whenever riding this POLARIS vehicle, always wear a helmet that meets or exceeds established safety standards.

Approved helmets in the USA and Canada bear a U.S. Department of Transportation (DOT) label.



Approved helmets in Europe, Asia and Oceania bear the ECE 22.05 label. The ECE mark consists of a circle surrounding the letter E, followed by the distinguishing number of the country which has granted approval. The approval number and serial number will also be displayed on the label.



EYE PROTECTION

Do not depend on eyeglasses or sunglasses for eye protection. Whenever riding a POLARIS vehicle, always wear shatterproof goggles or use a shatterproof helmet face shield. POLARIS recommends wearing approved Personal Protective Equipment (PPE) bearing markings such as VESC 8, V-8, Z87.1, or CE. Make sure protective eye wear is kept clean.

SAFETY

CLOTHING

WARNING

Avoid wearing loose clothing or long scarves, which can become entangled in moving parts and cause serious injury. Always wear an approved helmet and eye protection.

Be prepared, be warm and be comfortable when riding. Be aware of the weather forecast, especially the windchill, and dress accordingly. See page 26.



SURVIVAL PREPARATION

For your safety, always ride in a group of other snowmobilers. Always tell someone where you're going and how long you expect to be gone. If it isn't possible to ride with others, and you must travel into remote areas, always carry survival equipment that's appropriate to the conditions you may encounter. Such equipment may include, but is not limited to: extra clothing, a sleeping bag, a flashlight, food and water, a signaling mirror, a means of building a fire, and a two-way radio or cellular telephone.

Always carry the owner's manual on your snowmobile. For added protection, purchase and carry the following items on your snowmobile as well:

- Spare Drive Belt
- Extra Set of Spark Plugs
- Tow Rope
- Extra Oil
- Fuel Deicer
- Winter Survival Kit
- Trail Map
- First Aid Kit
- Tool Kit

EXCESSIVE SPEED

WARNING

High speed driving, especially at night, could result in serious injury or death.
Always reduce speed when driving at night or in inclement weather.

Always observe all state and local laws governing snowmobile operation and speed limits. Always be alert and pay attention to the trail ahead. If your speed is 40 MPH (64 km/h), your snowmobile is traveling about 60 feet (18 m) per second. If you look back for only two seconds, your snowmobile will travel about 120 feet (36 m). If your speed is 60 MPH (96 km/h), your snowmobile will travel about 180 feet (55 m) in two seconds.

Traveling at night requires extra caution. Check headlight and taillight to ensure proper operation, and don't over-drive your headlight beam. Always be able to bring your snowmobile to a stop in the distance illuminated by the headlight.

DRIVER AWARENESS

Slow down when traveling near poles, posts, or other obstacles. Be especially alert if you're snowmobiling after dark. Always be on the alert for wire fences. Single strands are especially dangerous, since there may be a great distance between posts. Guy wires on utility poles are also difficult to distinguish.

Make sure the way is clear before crossing railroads and other roads and highways. The noise of your snowmobile will drown out the sound of approaching vehicles. Look ahead, behind, and to both sides before turning or crossing railroad tracks or highways. Steep embankments may also hide your view. Always leave yourself a way out.



Variances in snow depth and/or water currents may result in uneven ice thickness. You may drown if you break through the ice. Never travel on frozen bodies of water unless you have first verified that the ice is sufficiently thick to support the weight and moving force of the snowmobile, you and your cargo, together with any other vehicles in your party. Always check with local authorities and residents to confirm ice conditions and thickness over your entire route. Snowmobile operators assume all risk associated with ice conditions on frozen bodies of water.

When teaching inexperienced operators to ride, set up a predetermined course for practice. Make sure they know how to drive and control the snowmobile before allowing them to make longer trips. Teach them proper snowmobile courtesy, and enroll them in driver's training and safety courses.

SAFETY

DISABLED OPERATORS

Safe operation of this rider-active vehicle requires good judgement and physical skills. Operators with cognitive or physical disabilities have an increased risk of loss of control, which could result in serious injury or death.

MOUNTAINOUS TERRAIN RIDING

Mountainous terrain operation, even for experienced riders, can present conditions and situations that could result in serious injury or death. Please review all of the information about riding in mountainous terrain on the following pages of this manual.

WARNING

An avalanche can occur at any time, in any conditions and on any slope.

The avalanche information provided in this manual should be considered basic information and is not intended to replace your participation in an avalanche safety training course. After reviewing the avalanche information in this manual, be sure to participate in an avalanche safety training course before riding in mountainous terrain. The training course will provide more information as well as the opportunity to practice riding and using proper search and recovery techniques.

For more information, education, training courses, and links to international resources, visit www.avalanche.org or scan the QR code with your smartphone or other device.



GET THE SAFETY GEAR

In addition to carrying a spare belt, spark plugs and tools on each snowmobile, each person in your riding group should wear the recommended snowmobile riding apparel and carry (on their person) the following survival items when riding in mountainous terrain:

- A digital avalanche beacon with new “fresh” alkaline batteries
- An avalanche probe
- A compact shovel and hand saw
- A backpack (preferably an avalanche air bag backpack)
- Emergency provisions, including the following items:
 - Small first aid kit
 - Extra pair of gloves
 - Extra dry socks
 - Tow rope, map, compass/GPS
 - Lighter or waterproof matches
 - Signal mirror and whistle
 - Bottled water
 - High calorie snack food
 - Compact emergency blanket



GET TO KNOW YOUR SAFETY GEAR


Following the safety gear and apparel recommendations will increase your chances of survival if you encounter an avalanche or become stranded in the backcountry, but even experienced and properly-equipped snowmobilers, hikers and skiers perish in avalanches or succumb to hypothermia. Using a beacon or probe for the first time during an avalanche recovery operation, or not knowing how to deploy your avalanche air bag backpack during a slide, should be considered UNACCEPTABLE to you and all members of your riding group. It's critical that you *and all members of your riding group* know how to use the safety gear.

While you may know how to use your gear, you may have to rely on your riding group to find you in an avalanche. Make sure they know how to use their gear.

- Dress in layers. Multiple layers of clothing provide the best barrier to cold and wind. Layers can be removed, but if you start out without enough layers, they cannot be added later. Avoid cotton materials, which will freeze if they get wet.
- Wear highly visible gear.
- Try on all gear and equipment to make sure it fits and doesn't interfere with your riding capabilities. Place all survival aids in your backpack and wear the backpack at all times. Non-essential items can be stored on the snowmobile in an accessory bag.
- Read and follow the manufacturer's user and maintenance instructions for all gear. If you have questions about how your gear works, contact the manufacturer for more information.
- Practice using your beacons, shovels and probes with your riding group in real-world conditions wearing all of your gear. Have someone hide an active "transmitting" beacon by throwing it (not walking it) into a snowbank and timing your group's search for it.
- Test deploying your gear. If you own an avalanche air bag backpack, check with the manufacturer's test deployment guidelines and bottle weight replacement specifications. Most air bag backpack manufacturers recommend testing the pack once a year so you know it works and feel comfortable with the bag and deployment time.
- Make sure your probe and shovel are in good condition and that you know how to assemble them.

GET THE PICTURE

Slopes steeper than 30° are more prone to avalanches, but any slope should be considered avalanche terrain, even small slopes with trees. Low-angle slopes are also avalanche terrain if they have steeper slopes above them.

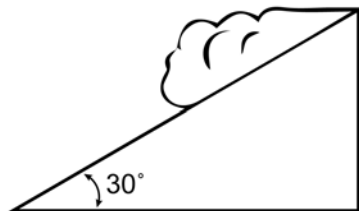

NOTE

The 30° slope graphic is for illustration purposes only. The risk of an avalanche is always present in mountainous terrain, regardless of slope angle.

Always look for the following warning signs of unstable snow. If you see or hear any of these signs, riding on or below any slope is dangerous and should be avoided:

- Recent avalanches
- A recent heavy snowfall
- A “whumpfung” sound under a snowpack
- Blowing snow
- Rain
- Cracks across the top of a snowpack
- Rapid warming

GET OUT OF HARM'S WAY

- Before riding, always tell a responsible person (i.e. at the lodge or gas station) where your group is going.
- Never ride alone. Always ride in a small, manageable group. Riding in a large group makes it more difficult to track riders or find missing members.
- Go “one at a time”. Only one snowmobile at a time should cross, ascend or highmark a slope. Other riders should watch from a safe location until the previous rider exits the slope.
- Never park at the base of a slope or at the bottom of a gully or valley. When parking to take a break or watch other riders, park at the sides of the slope with the front of your snowmobile pointed away from the slope.

SAFETY

GET THE FORECAST

Make a riding plan based on the current avalanche and weather forecast. It is important to remember that overnight weather conditions may have created unsafe riding terrain that was considered safe the day before. Visit www.avalanche.org or scan the QR code. Follow the page links to locate current avalanche reports and conditions for your area of operation.



GET AVALANCHE SAFETY TRAINING

POLARIS recommends you and all members of your riding group participate in an avalanche safety course. Visit www.avalanche.org/education or scan the QR code for education and training resources.



AVALANCHE AWARENESS

Avalanches are a matter of timing. A steep slope can be safe one day, but unsafe the next day due to changing weather and wind conditions.

- Always review the user instructions provided with your safety equipment and follow the recommendations for maintenance, testing and use. Always test your safety equipment to ensure it works properly before riding in mountainous terrain.
- Always store your survival gear in your backpack and wear the backpack. Do not store your survival gear on the snowmobile.
- Always research current avalanche conditions in your area of operation before riding. Check with local law enforcement, resort or lodging personnel, gas station attendants and other riders to learn about current conditions and any advisories in the area.
- Read and understand the avalanche danger scale. Pay attention to any danger level warnings issued for your area of operation.
- Always remain alert while riding in mountainous terrain. Be aware of snowpack conditions above you as you ride. Avalanches can occur at any time regardless of current condition reports.

North American Public Avalanche Danger Scale

Avalanche danger is determined by the likelihood, size and distribution of avalanches.

DANGER LEVEL		TRAVEL ADVICE	LIKELIHOOD OF AVALANCHES	AVALANCHE SIZE AND DISTRIBUTION
5 Extreme		Avoid all avalanche terrain.	Natural and human-triggered avalanches certain.	Large to very large avalanches in many areas.
4 High		Very dangerous avalanche conditions. Travel in avalanche terrain <u>not</u> recommended.	Natural avalanches likely; human-triggered avalanches very likely.	Large avalanches in many areas; or very large avalanches in specific areas.
3 Considerable		Dangerous avalanche conditions. Careful snowpack evaluation, cautious route-finding and conservative decision-making essential.	Natural avalanches possible; human-triggered avalanches likely.	Small avalanches in many areas; or large avalanches in specific areas; or very large avalanches in isolated areas.
2 Moderate		Heightened avalanche conditions on specific terrain features. Evaluate snow and terrain carefully; identify features of concern.	Natural avalanches unlikely; human-triggered avalanches possible.	Small avalanches in specific areas; or large avalanches in isolated areas.
1 Low		Generally safe avalanche conditions. Watch for unstable snow on isolated terrain features.	Natural and human-triggered avalanches unlikely.	Small avalanches in isolated areas or extreme terrain.
Safe backcountry travel requires training and experience. You control your own risk by choosing where, when and how you travel.				

SAFETY

ICE AND SNOW BUILD-UP

WARNING

Ice and snow build-up may interfere with the steering of your snowmobile, resulting in serious injury or death. Keep the underhood area free of snow and ice.

Before driving, manually turn the skis to the left and right to be sure ice and snow are not interfering with full left and right steering. If difficulty is encountered, remove ice and snow build-up that may be obstructing the steering linkage.

DRIVING ON SLIPPERY SURFACES

WARNING

Never attempt an abrupt change of direction when operating on slippery surfaces. Proceed slowly and use extra caution. Driving on ice or hard-packed snow reduces steering and braking control, which may result in loss of control and serious injury or death. Slow down and use extra caution when operating on slippery surfaces.

INADEQUATE SNOW CONDITIONS

Since snow provides the only lubrication for the power slide suspension and, on liquid cooled models, cooling for the engine, adequate snow cover is a requirement for operation of your snowmobile.

NOTICE

Driving in too little snow will result in excessive wear and damage to the slide rail, track and/or engine.

WARNING

Inadequate cooling and lubrication will lead to overheating of the slide rail and track, causing premature wear, damage and failure, which can result in serious injury. Reduce speeds and frequently drive into fresh snow to allow adequate cooling and polishing of the slide rail and track surfaces. Avoid operating for prolonged periods on ice, hard-packed surfaces or roads.

OPERATING IN DEEP SNOW

If the snowmobile becomes stuck in snow, clear the running board area of snow, then step down the snow in front of the snowmobile so that when the throttle is opened, the snowmobile will be able to climb up and over the snow.

DRIVING DOWNHILL

When riding downhill, shift your weight to the rear of the snowmobile and reduce your speed to a minimum. Apply just enough throttle to keep the clutch engaged, allowing the engine's compression to help slow the snowmobile and keep it from rolling freely downhill.

WARNING

When driving on long downhill stretches, pump the brakes. Riding the brakes may cause the brake system to overheat, which may result in brake failure. Excessive or repetitive use of the brakes for high speed stops will also cause an overheated brake system. This condition may lead to a sudden loss of brakes and/or fire and may result in serious injury or death.

DRIVING IN HILLY TERRAIN

WARNING

Climbing a hill or crossing the face of a slope may result in loss of balance and snowmobile rollover, causing serious injury or death. Use caution and good judgement when driving in hilly terrain.

Use extra caution when operating in hilly terrain. If climbing a hill is unavoidable, keep your weight low and forward. If you must cross the face of a slope, keep your weight on the uphill side of the snowmobile to maintain proper balance and avoid possible roll-over.

Slow down when reaching the crest of a hill. Be prepared to react to obstacles, sharp drops or other people or vehicles that may be on the other side of the hill.

If you're unable to continue up a hill, turn the snowmobile downhill before it loses momentum. If this isn't possible, spin the track just enough to dig in to prevent it from rolling back down the hill. Stop the engine and set the parking brake (if equipped). Keeping away from the downhill side of the snowmobile, pull the rear of the snowmobile around and point the front end and skis downhill. Remount the snowmobile, restart the engine, release the parking brake, and descend the hill carefully.

SAFETY

DRIVE BELT

Do not operate the engine with the drive belt removed.

Any servicing that requires operation without a belt can be performed by your dealer.

WARNING

Operation of the engine with the belt removed may result in injury or damage to the engine.

INTAKE SILENCER

Do not operate the engine with the intake silencer or filter removed.

NOTICE

Damage to the engine may occur if the intake silencer or filter are removed.

CLUTCHES

Do not attempt to service the clutches.

All clutch service can be performed by your dealer. The clutch is a complex mechanism that rotates at high speeds. Each clutch is dynamically balanced before installation. Any tampering may disrupt this precision balancing and create an unstable condition.

COLD WEATHER DRIVE-AWAY

Whenever your snowmobile has been parked for a length of time, especially overnight, always make sure the skis and track are loosened from ice and snow before attempting to drive. Apply the throttle with enough authority to put the snowmobile into motion, but always operate within safety limits.

MANEUVERABILITY

While much control and maneuverability is achieved through the steering system and skis, maximum control is achieved by the shifting of your body weight. Maneuverability will change for lighter operators or snowmobiles designed to carry a load.

DRIVING RESPONSIBLY

Every snowmobile handles differently, and even the most docile conditions may become dangerous if operators drive improperly. If you're new to snowmobiling, acquaint yourself with the snowmobile and with what it will and won't do under various conditions. Even seasoned drivers should spend some time getting the feel for a snowmobile before attempting ambitious maneuvers.

- A snowmobile depends on the rider's body position for proper balance in executing turns, traversing hills, etc. Always start on a smooth, level area to begin building your operating experience.
- Before allowing someone else to use your snowmobile, know the extent of their operating skills. Check to see if they've taken a snowmobile safety course and have an operator's certificate. For their protection, as well as yours, make sure they take a snowmobile safety course. Everyone can benefit from the course.
- Don't "jump" your snowmobile over large drifts or similar terrain. Jumping may injure your back because of spinal compression that could occur when the snowmobile impacts the ground. The seat and suspension of your snowmobile have been designed to provide protection under normal riding conditions. Your snowmobile is not intended for this kind of use.
- Be courteous to oncoming traffic by dimming your headlights and reducing your speed.
- When traveling in a group of snowmobiles, don't tailgate (follow too closely). Leave enough distance between snowmobiles to provide ample stopping room and to provide protection from flying snow and debris. Allow even more distance when driving on slippery surfaces or when driving in darkness or other low visibility conditions. Be aware of any snowmobile traffic around your vehicle. Drive defensively to avoid accidents.
- Remove the key from the ignition when you leave the snowmobile unattended.

SAFETY

WINDCHILL/TEMPERATURE CHARTS

The following information is provided to help you determine when temperatures become dangerous for riding.

WINDCHILL CHART (°F)

Wind Speed in MPH	Actual Thermometer Reading (°F)																	
	40	35	30	25	20	15	10	5	0	-5	-10	-15	-20	-25	-30	-35	-40	-45
	Equivalent Temperature (°F)																	
Calm	40	35	30	25	20	15	10	5	0	-5	-10	-15	-20	-25	-30	-35	-40	-45
5	36	31	25	19	13	7	1	-5	-11	-16	-22	-28	-34	-40	-46	-52	-57	-63
10	34	27	21	15	9	3	-4	-10	-16	-22	-28	-35	-41	-47	-53	-59	-66	-72
15	32	25	19	13	6	0	-7	-13	-19	-26	-32	-39	-45	-51	-58	-64	-71	-77
20	30	24	17	11	4	-2	-9	-15	-22	-29	-35	-42	-48	-55	-61	-68	-74	-81
25	29	23	16	9	3	-4	-11	-17	-24	-31	-37	-44	-51	-58	-64	-71	-78	-84
30	28	22	15	8	1	-5	-12	-19	-26	-33	-39	-46	-53	-60	-67	-73	-80	-87
35	28	21	14	7	0	-7	-14	-21	-27	-34	-41	-48	-55	-62	-69	-76	-82	-89
40	27	20	13	6	-1	-8	-15	-22	-29	-36	-43	-50	-57	-64	-71	-78	-84	-91
45	26	19	12	5	-2	-9	-16	-23	-30	-37	-44	-51	-58	-65	-72	-79	-86	-93
50	26	19	12	4	-3	-10	-17	-24	-31	-38	-45	-52	-60	-67	-74	-81	-88	-95
55	25	18	11	4	-3	-11	-18	-25	-32	-39	-46	-54	-61	-68	-75	-82	-89	-97
60	25	17	10	3	-4	-11	-19	-26	-33	-40	-48	-55	-62	-69	-76	-84	-91	-98
Frostbite in >>									30 min.	10 min.	5 min.							

WINDCHILL CHART (°C)

Wind Speed in Km/h	Actual Thermometer Reading (°C)																	
	5	2	-1	-4	-7	-10	-13	-16	-19	-22	-25	-28	-31	-34	-37	-40	-43	-46
	Equivalent Temperature (°C)																	
Calm	5	2	-1	-4	-7	-10	-13	-16	-19	-22	-25	-28	-31	-34	-37	-40	-43	-46
8	3	0	-4	-7	-11	-14	-18	-22	-25	-29	-32	-36	-39	-43	-46	-50	-53	-57
16	2	-2	-6	-10	-13	-17	-21	-24	-28	-32	-36	-39	-43	-47	-50	-54	-58	-62
24	1	-3	-7	-11	-15	-19	-22	-26	-30	-34	-38	-42	-45	-49	-53	-57	-61	-65
32	0	-4	-8	-12	-16	-20	-24	-28	-32	-36	-39	-43	-47	-51	-55	-59	-63	-67
40	-1	-5	-9	-13	-17	-21	-25	-29	-33	-37	-41	-45	-49	-53	-57	-61	-65	-69
48	-1	-5	-9	-13	-18	-22	-26	-30	-34	-38	-42	-46	-50	-54	-58	-62	-66	-70
56	-2	-6	-10	-14	-18	-22	-26	-31	-35	-39	-43	-47	-51	-55	-59	-64	-68	-72
64	-2	-6	-10	-15	-19	-23	-27	-31	-35	-40	-44	-48	-52	-56	-61	-65	-69	-73
72	-2	-7	-11	-15	-19	-23	-28	-32	-36	-40	-45	-49	-53	-57	-61	-66	-70	-74
80	-3	-7	-11	-15	-20	-24	-28	-33	-37	-41	-45	-50	-54	-58	-62	-67	-71	-75
88	-3	-7	-12	-16	-20	-24	-29	-33	-37	-42	-46	-50	-55	-59	-63	-67	-72	-76
96	-3	-8	-12	-16	-21	-25	-29	-34	-38	-42	-47	-51	-55	-60	-64	-68	-73	-77
Frostbite in >>									30 min.	10 min.	5 min.							

SAFETY LABELS AND LOCATIONS

Warning labels are placed on the snowmobile for your protection. Read and follow the instructions of the labels and warnings on the snowmobile carefully. If any of the labels depicted in this manual differ from the labels on your snowmobile, always read and follow the instructions of the labels on the snowmobile. If any label becomes illegible or comes off, contact your POLARIS dealer to purchase a replacement. Replacement safety labels are provided by POLARIS at no charge. The part number is printed on the label.

NO PASSENGER WARNING (ONE RIDER MODELS)


The No Passenger Warning/Fuel Recommendation label ① is located below the steering post.

WARNING

This vehicle is designed for operator only. **NO PASSENGER.**

Fuel Recommended: 91+ Octane
Without Ethanol.

For Maximum Performance See Decal
On Left Hand Side Panel For Proper
Gauge Setting.

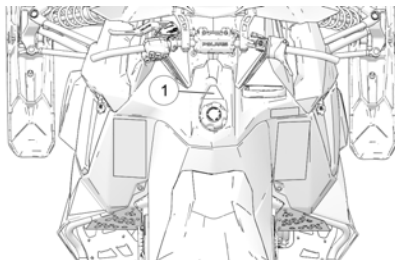


REVERSE WARNING

The Reverse Warning label ② is located on either side of the operator seat.

WARNING

Reverse operation, even at low speeds, can cause loss of control resulting in serious injury or death. To avoid loss of control, always:

- Look behind before and while backing up.
- Avoid sharp turns.
- Shift to or from reverse only when stopped.
- Apply throttle slowly.

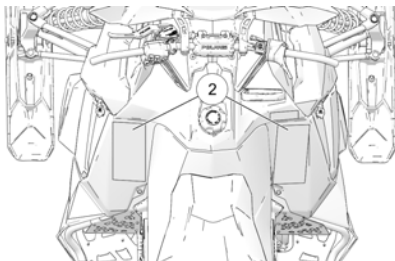

NOTE: For more information, see Owner's Manual.

If electric reverse:

- Machine stopped and engine at idle, push yellow button on LH control to reverse. Flashing light on dash indicates reverse operation.
- Push button again to return to forward.

SAFETY

TUNNEL WARNING

The Tunnel Warning label is located on the rear of the tunnel.

WARNING

Hot Surface

Do Not Touch

Burn may result. Entire top of tunnel may be hot. Install only accessories specifically approved for this model by Polaris.



WARNING

Stay clear of track. Do not sit on seat back. Entanglement with the track or a fall from seat back can result in severe injury or death.

MAX. 25 lbs.

CLUTCH WARNING/BELT REMOVAL

The clutch warning label ③ is found on the oil bottle:

WARNING

Do not operate engine with hood or side panels open.

Do not attempt adjustment with engine running.

Do not operate engine with the clutch guard removed.

Never run engine with drive belt removed.

Never service clutches yourself. Your dealer can perform this service.



BELT REMOVAL - ALL UNITS

1. For electric reverse models, engine must be stopped in forward to allow clutch opening.
2. Install L-wrench from fender into the open threaded hole in the driven clutch.
3. Turn the L-wrench clockwise to open the sheaves and replace the belt. Return the L-wrench to the fender.

SEE OWNER'S MANUAL FOR SHEAVE WIDTH ADJUSTMENT PROCEDURE.

OPERATION WARNING

The operation warning label is located on the console.

WARNING

- To avoid serious injury or death, read and understand all warnings and the Owner's Manual before operation. If manual is missing, contact a POLARIS dealer for a replacement.
- This vehicle is capable of high speeds. Buried objects or uneven terrain can cause loss of control. Reduce speed and use extreme caution when operating in unfamiliar terrain.
- Excessive speed, especially at night or with limited visibility, can result in insufficient time for you to react to terrain changes, to avoid unexpected obstacles, or to stop safely.
- Never consume alcohol or drugs before or while operating this vehicle.
- In an emergency, push down the Auxiliary Shut-Off Switch, located on the top of the throttle control assembly, to stop the engine. Then pull the brake lever to stop.
- Always wear an approved helmet, eye protection, and adequate clothing while operating this vehicle.
- This vehicle is designed for adult use only. Check local laws for age requirements.
- When operating with a passenger (on approved models only) reduce speed and allow extra space for steering and stopping. A passenger reduces your ability to control the vehicle.
- When operating on hard-packed snow, ice, or when crossing roads, steering and braking ability are greatly reduced. Reduce speed and allow extra space to turn or stop.
- To maintain vehicle control on ice or hard-packed surfaces, you should have a proper balance of ski carbides to track studs. See Owner's Manual for proper use of traction products.
- Repeated stops from high speed may cause fading or sudden loss of braking ability.
- Parking brake may relax when used for long periods. Do not leave brake engaged for more than five minutes.
- Before starting engine, check throttle, brake, and steering for proper operation. Make sure hood and side panels are latched. Be seated and in position to control the vehicle.


Oil injection system: Use unmixed fuel only. Check oil level when refueling.

FEATURES

COMPONENT LOCATIONS

NOTE



The figures below are for reference only. Your model may differ slightly.

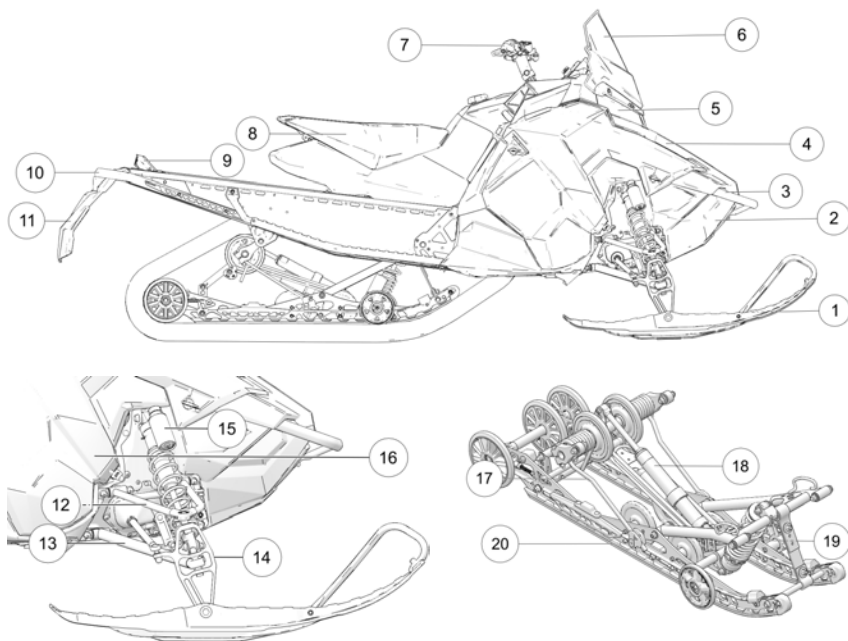

- | | | |
|--------------------------|---------------------|--------------------------------|
| ① Skis | ⑧ Operator Seat | ⑮ Independent Front Suspension |
| ② Nosepan | ⑨ Taillight | ⑯ Side Panel |
| ③ Front Bumper | ⑩ Rear Bumper | ⑰ Torsion Spring |
| ④ Hood | ⑪ Snow Flap | ⑱ Rear Track Shock |
| ⑤ Headlight | ⑫ Upper Control Arm | ⑲ Front Track Shock |
| ⑥ Windshield (accessory) | ⑬ Lower Control Arm | ⑳ Rail |
| ⑦ Handlebar | ⑭ Spindle | |

FEATURES

CONTROLS

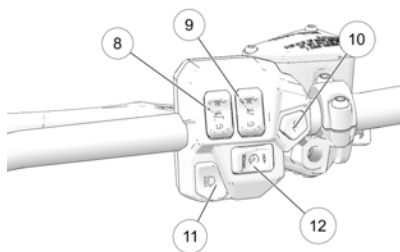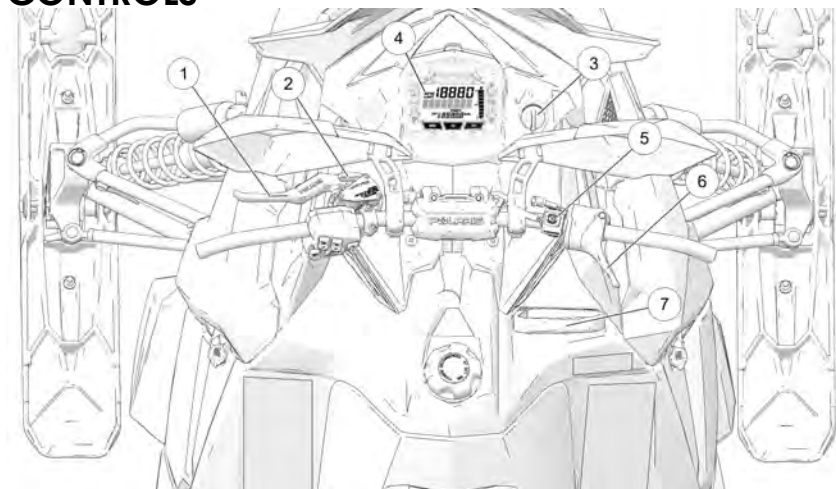


- ① Brake Lever
- ② Parking Brake Lock
- ③ Ignition Switch
- ④ Instrument Cluster
- ⑤ Engine Stop Switch
- ⑥ Throttle Control
- ⑦ Recoil Starter Handle
- ⑧ Handlebar Grip Warmer Switch
- ⑨ Thumb Warmer Switch
- ⑩ Electronic Reverse Button
- ⑪ Headlight Dimmer Switch
- ⑫ MODE/SET Switch

IGNITION SWITCH

OFF Vehicle / PIDD power off

RUN Vehicle / PIDD power on

START Activates starter motor (if equipped)

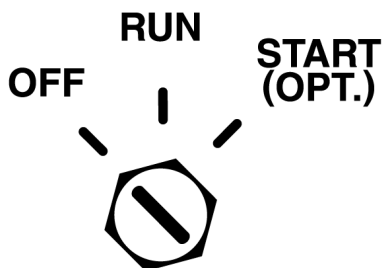

The ignition switch has three positions: OFF, RUN, and START.

If equipped with electric start, turn the key to START to crank the engine. When the key is released, it automatically returns to the RUN position.

NOTE


If the key remains in the RUN position after using the engine stop switch to stop the engine, the PIDD (POLARIS Interactive Digital Display) remains active. The PIDD screen will turn off after several minutes of inactivity, but if a battery is installed, the PIDD will continue to draw a small amount of current from the battery until the key is turned off. This feature is useful for accessing the PIDD without starting the engine, but turn the key off when the PIDD is not in use.

The PIDD is not dependent on a battery while the engine is running, but a battery (if installed) supplies a constant power source when the engine is turned off or when the engine is transitioning between forward and reverse operation. If a battery is not installed, the PIDD reboots when the engine is started and when electronic reverse (PERC) is used.

FEATURES

12-VOLT DC POWER RECEPTACLE

If equipped, the 12-volt DC power receptacle is located on the hood next to the instrument cluster. The 12-volt power receptacle is protected by a 2 amp mini blade fuse located in the protective bag above the clutch cover. Use of the 12-volt DC power receptacle is recommended for connecting power-sensitive devices such as GPS units and cell phones.

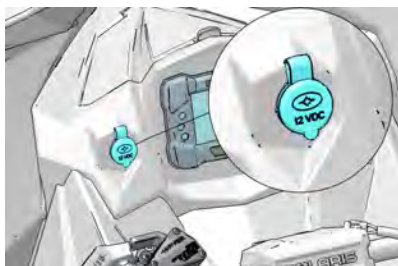

NOTE


The 12-volt DC power receptacle and the jumper harness required to connect the receptacle to the hood wiring harness can be purchased from your POLARIS dealer.

12-VOLT RCA POWER SOURCES

Some rider accessories require the use of an RCA power adapter. If your model is not equipped with an RCA power plug on the handlebar cover, an accessory 12-volt RCA adapter or RCA power plug can be purchased from your POLARIS dealer.


12-VOLT RCA ADAPTER

The RCA adapter can be used if your model is equipped with the 12-volt DC power receptacle. Plug the adapter into the receptacle to convert it to a 12-volt RCA power outlet.

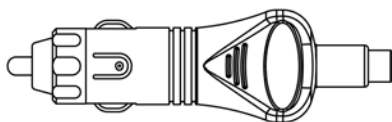

12-VOLT RCA POWER PLUG


The RCA power plug (with cover) mounts to the handlebar cover and is plugged into the main vehicle wire harness. Installation instructions are provided with the accessory. This power point is powered by the load shed relay and is not fuse protected. POLARIS recommends using this power point for electric helmet shields.

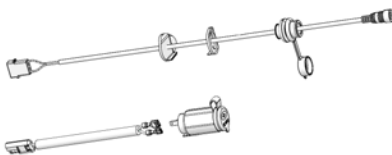

ADJUSTABLE HEADLIGHT

NOTE

The image below is for reference only. Your model may differ slightly.

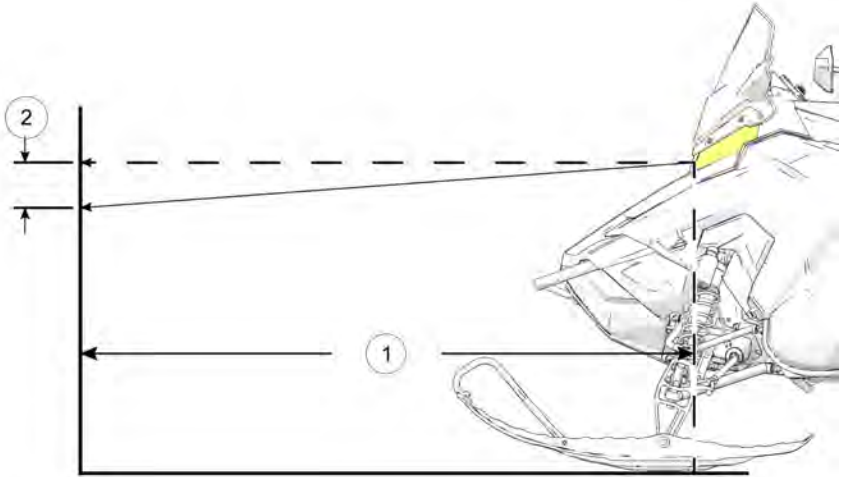

The headlight can be adjusted for vertical aim using the following procedure.

1. In a well-ventilated area, position the snowmobile on a level surface with the headlight approximately 25 feet (7.6 m) from a wall ①.
2. Place the rider or the approximate weight of the rider on the seat or tunnel floorboards.
3. Measure the distance from the floor to the center of the headlight and make a mark on the wall at the same height.
4. Start the engine. Move the headlight switch to high beam.
5. Observe the headlight aim on the wall. The most intense part of the headlight beam should be two inches (5 cm) ② below the mark on the wall.
6. If adjustment is necessary, access the headlight adjuster knob through the left side panel. Turn the adjuster knob clockwise to lower the beam. Turn the adjuster counter-clockwise to raise the beam.

FEATURES

TOOLS


The belt removal L-wrench tool, spare belt, spark plug, and spark plug tool container are located behind the left engine compartment panel.

NOTE

Spare belt and spark plugs are not provided with the snowmobile.

L-WRENCH

When properly engaged in the bracket, the L-wrench secures the fender to the console. To retrieve the L-wrench, rotate it counter-clockwise and slide it upward from the bracket. Return the L-wrench to the bracket and rotate it clockwise when it's not in use.

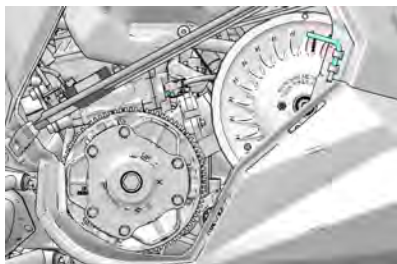

SPARK PLUG WRENCH

The spark plug wrench secures the spare belt/spark plug tool container to the front bumper. Remove the container to add or access a spare spark plug or belt.

REPLACEMENT DRIVE BELT

To insert a replacement drive belt into the spare drive belt container, do the following:

1. Rotate the spark plug wrench counter-clockwise to release it from the bracket.
2. Pull the wrench upward to remove it.
3. Tilt the container until the bracket detaches from the bumper tube.
4. Pull the container out of the compartment.
5. When placing a drive belt into the container, fold the belt as shown. Verify that the belt loop at the rear of the container is positioned slightly higher than the front loop.
6. Slide the container into the engine compartment at an angle.
7. Position the container bracket onto the bumper tube and rotate it downward.
8. Reinstall the spark plug wrench into the bracket and through the hole in the bumper tube.
9. Rotate the spark plug wrench clockwise until it locks into place.

DETONATION ELIMINATION TECHNOLOGY (DET)

When DET senses and takes action to reduce detonation, the driver may notice a drop in engine RPM and/or reduced performance. The ECU will illuminate the check engine LED and display "DETONATION" on the LCD screen whenever the DET system is active.

If the ECU determines the detonation cannot be controlled by normal means, and further operation may cause engine damage, the check engine LED will flash, the instrument clusters will display "DETONATION" and the ECU will either limit the maximum engine speed or turn off the engine.

If the ECU limits RPM, the limit will remain active until the driver stops and restarts the engine.

DETONATION PROTECTION MODES	
Check Engine LED/Gauge Display	Protection Mode
600 Models	
LED illuminated / "DETONATION" displayed	Slight drop in engine RPM/power
LED flashing / "DETONATION" displayed	Engine shut-off
800 HO Models	
LED illuminated / "DETONATION" displayed	Slight drop in engine RPM/power
LED flashing / "DETONATION" displayed	Exhaust valves close to reduce engine RPM/power. Restart engine to reset.

The most likely causes of severe detonation are outlined in the troubleshooting table on page 154.

NOTE

The PIDD alert indicates which cylinder is experiencing detonation

OIL PUMP FAILURE PROTECTION (IF EQUIPPED)

If the ECU determines there is a problem with the electronic oil pump control circuit, the engine management system will limit engine speed to approximately 4000 RPM and illuminate the check engine indicator light on the instrument cluster or PIDD.

FEATURES

ENGINE OVERHEAT INDICATORS


OVER-TEMPERATURE INDICATOR (STANDARD CLUSTER)

The over-temperature indicator on the standard instrument cluster will *illuminate* when the engine is overheating. Take action to cool the engine. See page 39. The indicator will *flash* when engine temperature reaches critical levels. *Stop the engine immediately.*



OVERHEAT WARNING (PIDD)

The engine temperature scale ② located on the right side of the PIDD screen changes to *RED* and the check engine temperature indicator ③ located on the top left of the screen illuminates when the engine is overheating. Take action to cool the engine. See page 39. The indicator will *flash* when engine temperature reaches critical levels. *Stop the engine immediately.*

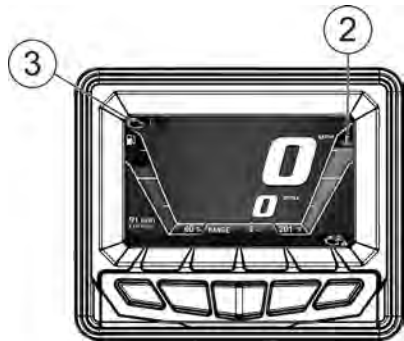

Please see your PIDD Owner's Manual for more information.

600/800 HO MODELS ENGINE TEMPERATURE PROTECTION MODES	
Hot Lamp	Threshold*
ON	Lamp illuminates: Idle = 201° F (94° C), WOT = 185° F (85° C)
FLASHING	Lamp Flashes, Engine Turns Off: Idle = 215.6° F (102° C), WOT = 201° F (94° C)
* Only the minimum (idle) and maximum (WOT) parameters are listed.	

FLASHING INDICATOR

Flashing indicators indicate continued operation could result in serious engine damage. The engine management system will automatically reduce engine power and create a misfire condition. Stop the engine *immediately*. Allow the engine to cool down.

NOTE

If engine overheating seems to be caused by something other than poor cooling conditions, your dealer can perform this service.

ENGINE-COOLING ACTIONS

If the engine is overheating, promptly take action to cool the engine.

- Drive in loose snow.
- View the coolant level. *Do not open the pressure cap while the engine is hot.*
- Stop the engine and allow it to cool down.
- Add coolant if the level is low. *Do not add coolant while the engine is hot. Wait for the engine to cool before adding coolant.*

NOTICE

If you must continue to operate while the indicator light is *illuminated*, drive slowly and stop the engine frequently to allow it to cool down.

EXTENDED IDLE ENGINE SHUTOFF

This engine feature causes the ECU to shut down the engine when engine temperature reaches 120° F (50° C) and there is no throttle lever input for five minutes.

NOTE

If equipped with an PIDD, the gauge will remain on because the key is in the ON position.


SECURITY SYSTEM (IGNITION LOCK SYSTEM)

Your snowmobile has an optional security function that can be activated by an authorized POLARIS dealer. If you have this feature activated, you can lock the ignition to prevent unauthorized use when leaving the snowmobile unattended. A locked system will limit engine speed to 3000 RPM, which prevents clutch engagement, and the snowmobile will not move when throttle is applied.

If your model is equipped with the POLARIS Interactive Digital Display (PIDD), please see the PIDD Owner's Manual provided with your snowmobile.

GAUGE

STANDARD INSTRUMENT CLUSTER

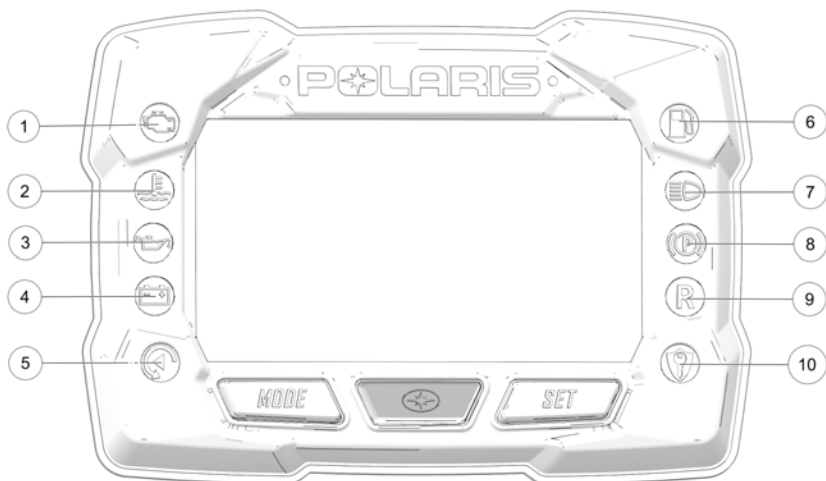


- | | |
|-----------------------|-----------------|
| ① Check Engine | ⑥ Low Fuel |
| ② Engine Hot | ⑦ High Beam |
| ③ Low Oil | ⑧ Parking Brake |
| ④ Low Battery Voltage | ⑨ Reverse |
| ⑤ Playback | ⑩ Security |

NOTICE

Certain products will damage the lens and other plastic surfaces. Do not use alcohol to clean the instrument cluster. Immediately clean off any gasoline that splashes on the instrument cluster.

The instrument cluster contains indicator lights and the rider information center. The information center can be controlled by either the MODE and SELECT buttons on the instrument cluster or by the MODE/SET switch ⑪ on the Left Hand Control.



GAUGE


INDICATOR LAMPS

INDICATOR	CONDITION
	This indicator appears if an EFI-related fault occurs. Do not operate the snowmobile if this warning appears. Serious engine damage could result. Your dealer can assist.
	The over-temperature indicator will illuminate when the engine is overheating. Take action to cool the engine. The indicator will flash when engine temperature reaches critical levels. Stop the engine immediately.
	The low oil indicator light may flicker at times due to oil movement in the bottle, but when the light comes on and remains on, add the recommended oil before further operation.
	The low battery voltage indicator illuminates when the battery voltage is low.
	The playback indicator illuminates when the gauge is in playback mode.
	The low fuel indicator illuminates when fuel is low.
	The high beam indicator illuminates when the lights are set to high beam.
	The parking brake Indicator illuminates when the parking brake is engaged. It will also illuminate when the service brake is in use.
	The reverse indicator flashes when the transmission is in reverse.
	The security indicator illuminates when the security system is activated.

RIDER INFORMATION CENTER

The rider information center is located in the instrument cluster. The center displays vehicle speed, engine speed, odometer, resettable trip meters (2), total engine hours of operation, fuel level, engine temperature, and a diagnostic display mode.

Setting changes must be made with the engine running or with the vehicle powered by an external DC power supply connector. The information center is set to display standard units of measurement for distance and temperature.

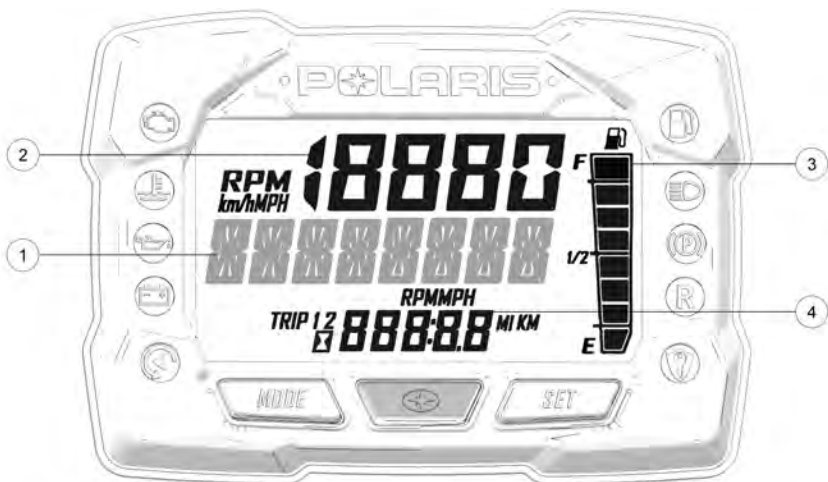

① **Information Display Area** - This area displays either engine speed or vehicle speed (whichever is not displayed in the speed display), engine temperature and maximum vehicle speed.

② **Speed Display** - The speed display area displays either vehicle speed or engine speed.

③ **Fuel Gauge** - Not available on all models. The segments of the fuel gauge show the level of fuel in the fuel tank. When the last segment clears, a low fuel warning is activated. All segments including the fuel icon will flash. Refuel immediately.

NOTE

The low fuel indicator and fuel level gauge on the Standard Instrument Cluster are not supported on models with a fuel level gauge on the fuel cap.

④ **Odometer/Engine Hour Display** - This area displays the odometer, Trip A, Trip B and engine hours.

SPEED DISPLAY AREA

The speed display area displays either vehicle speed or engine speed. Vehicle speed is displayed in either miles per hour (MPH) or kilometers per hour (km/h). Engine speed is displayed in revolutions per minute (RPM).

1. To change which item displays, first make sure the information display area is set to display either engine speed or vehicle speed.
2. *Press and release* the center  button.

INFORMATION DISPLAY AREA

This area displays either engine speed or vehicle speed (whichever is not displayed in the speed display), engine temperature, maximum vehicle speed, and speed or RPM. To change the display, *press and release* the MODE button or the MODE switch until the desired item is displayed.

ODOMETER/ENGINE HOUR DISPLAY AREA

This area displays the odometer, Trip 1 meter, Trip 2 meter, CLOCK, and Engine Hours meter.

The odometer displays the total distance traveled by the vehicle since manufacture. Each trip meter records the distance traveled by the vehicle on a trip if the meter is reset before each trip. The CLOCK displays the time, and the engine hour meter displays the total hours the engine has been in operation since manufacture.

To change the display, *press and release* the SET button or SET switch until the desired item is displayed.

To reset a trip meter, *press and hold* the SET button or SET switch until the meter resets to zero.

PLAYBACK FUNCTION

The playback function allows the rider to record and play back engine speed, vehicle speed and throttle position sensor information for up to three minutes.

TO RECORD

1. *Press and hold* the center  button on the instrument cluster to enter the Options Menu.
2. *Press and release* the MODE button until **PLAYBACK** appears in the information display area.



3. *Press and release* the SET button.
RECORD will appear in the information display area.



4. To begin recording, *Press and release* the SET button.
The playback indicator will flash while recording is in progress. Recording is complete when the light stops flashing.

NOTE

To stop recording at any time during the recording process, *press and release* the SET button.

GAUGE

TO PLAYBACK

1. To play back the recorded data, stop the vehicle and wait for engine speed to drop below clutch engagement.
2. *Press and hold* the center  button on the instrument cluster to enter the Options Menu.
3. *Press and release* the MODE button until **PLAYBACK** appears in the information display area.



4. *Press and release* the SET button twice.
PLAY will appear in the information display area.



5. *Press and release* the SET button to play the recorded data.
Once playback has concluded, REPLAY will appear in the information display area.
6. *Press and release* the SET button to REPLAY recorded data.
7. *Press and release* the MODE button to end playback and return to the Options Menu.

STANDARD/METRIC DISPLAY

The odometer and temperature displays can be viewed in either standard or metric units of measurement. Both displays change if units are changed. The new settings will remain until changed by the operator.

Change Method 1


1. *Press and hold* the center  button on the instrument cluster to enter the Options Menu.
2. *Press and release* the MODE button until engine temperature appears in the information display area.



3. *Press and release* the SET button or SET switch to change units.

Change Method 2

1. *Press and release* the SET button or SET switch until the odometer appears in the information display area.

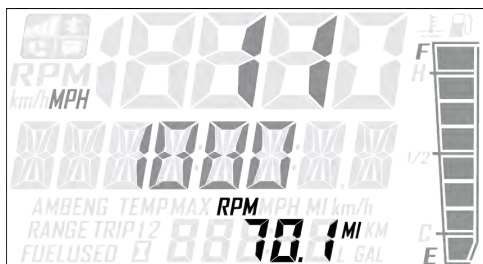

2. *Press and hold* the SET button or SET switch until the units change.

SECURITY SYSTEM (IGNITION LOCK SYSTEM)

This system is an optional feature and will not function until it has been activated by your authorized POLARIS dealer. If you have this feature activated, you can lock the ignition to prevent unauthorized use when leaving the snowmobile unattended. A locked system will limit engine speed to 3000 RPM, which prevents clutch engagement, and the snowmobile will not move when throttle is applied.

If you wish to use this feature, you must complete all four tasks on the following pages to have your system activated and to change the security code to one of your own choosing.

FIRST TIME USE OF YOUR SECURITY SYSTEM

Perform all tasks in the order shown if you wish to activate and use the optional security system.

TASK 1: Activate the security system

See your authorized POLARIS dealer to have the optional security system feature activated in the electronic control unit (ECU).

TASK 2: Lock the System the First Time

NOTE

To lock the system for the first time, use code 000.

1. *Press and hold* the center  button on the instrument cluster to enter the Options Menu.
2. *Press and release* the MODE button until SECURITY OFF appears in the information display area.



3. Press and release the SET button.

ENTER CODE will appear in the information display area.



4. Press and release the SET button to increase the 1st digit.
5. Press and hold the SET button to accept the 1st digit and advance to the 2nd digit.



6. Press and release the SET button to increase the 2nd digit.

GAUGE

7. Press and hold the SET button to accept the 2nd digit and advance to the 3rd digit.



8. Press and hold the SET button to accept the 3rd digit and submit code.

If code is correct, SECURITY ON will appear in the information display area. The system is now locked. Proceed immediately to Task 3.



If code is incorrect, BAD CODE will appear in the information display area. Return to step 3 to re-enter code.



TASK 3: Unlock the System**NOTE**

To unlock the system for the first time, use code 000.

1. While the engine is running, *Press and release* the SET button.

ENTER CO will appear in the information display area.



2. *Press and release* the SET button to increase the 1st digit.
3. *Press and hold* the SET button to accept the 1st digit and advance to the 2nd digit.



4. *Press and release* the SET button to increase the 2nd digit.

GAUGE

5. *Press and hold* the SET button to accept the 2nd digit and advance to the 3rd digit.



6. *Press and release* the SET button to increase the 3rd digit.
7. *Press and hold* the SET button to accept the 3rd digit and submit code.
- If code is correct, SECURITY OFF will appear in the information display area*



NOTE

The system is now *unlocked*.

If code is incorrect, BAD CODE will appear in the information display area. Return to step 1 to re-enter code.



8. You must now enter a new security code. Proceed immediately to TASK 4.

TASK 4: Enter Your New Security Code

1. Immediately after locking and unlocking the system, and while SECURE OFF is displayed, simultaneously *press and hold* the MODE and SET buttons.

SET NEW CODE will appear on the information display area.



2. *Press and release* the SET button to increase the 1st digit.
3. *Press and hold* the SET button to accept the 1st digit and advance to the 2nd digit.



4. *Press and release* the SET button to increase the 2nd digit.
5. *Press and hold* the SET button to accept the 2nd digit and advance to the 3rd digit.



GAUGE

6. *Press and release* the SET button to increase the 3rd digit.
7. *Press and hold* the SET button to accept the 3rd digit.

CODE SET will appear in the information display area, and then the new code will blink three times in the information display area



NOTE

Your new code is now set. The system is NOT locked.

8. Record your new security code in a safe place for future reference.

Record your new personal security code here: _____

TIP

If you lose your personal security code, see your dealer to have the code reset to "000". Then perform TASK 2 through TASK 4 to change the code to one of your own choosing.

LOCKING SYSTEM WITH PERSONAL SECURITY CODE

1. Start the engine.
2. *Press and hold* the center  button on the instrument cluster to enter the Options Menu.

3. Press and release the MODE button until SECURITY OFF appears in the information display area.



4. Press and release the SET button.

ENTER CODE will appear in the information display area.



5. Press and release the SET button to increase the 1st digit.
6. Press and hold the SET button to accept the 1st digit and advance to the 2nd digit.



7. Press and release the SET button to increase the 2nd digit.

GAUGE

8. *Press and hold* the SET button to accept the 2nd digit and advance to the 3rd digit.



9. *Press and hold* the SET button to accept the 3rd digit and submit code.

If code is correct, SECURITY ON will appear in the information display area. The system is now locked. Proceed immediately to Task 3.



If code is incorrect, BAD CODE will appear in the information display area. Return to step 3 to re-enter code.



UNLOCKING SYSTEM WITH PERSONAL SECURITY CODE

1. While the engine is running, *Press and release* the SET button.

ENTER CODE will appear in the information display area.



2. *Press and release* the SET button to increase the 1st digit.
3. *Press and hold* the SET button to accept the 1st digit and advance to the 2nd digit.



4. *Press and release* the SET button to increase the 2nd digit.
5. *Press and hold* the SET button to accept the 2nd digit and advance to the 3rd digit.



GAUGE

6. Press and release the SET button to increase the 3rd digit.
7. Press and hold the SET button to accept the 3rd digit and submit code.

If code is correct, SECURITY OFF will appear in the information display area



NOTE

The system is now *unlocked*.

If code is incorrect, BAD CODE will appear in the information display area. Return to step 1 to re-enter code.



CHANGING TO A NEW SECURITY CODE

Any time you wish to change your current security code to a new code, perform TASK 2 through TASK 4 of the First Time Use of Your Security System procedure. Instead of using the factory default code "000" in TASK 2 and TASK 3, use your current security code.

SECURITY SYSTEM ACCESS QUICK REFERENCE

Now that you have become familiar with the procedure for locking and unlocking the system, use the chart below as a quick reference.

SECURITY SYSTEM ACCESS QUICK REFERENCE CHART	
Action	Result
1. Start engine 2. <i>Press and hold</i> the center  button 3. <i>Press and release</i> the SET button until SECURITY appears in information display area. 4. <i>Press and release</i> SET button.	Displays ENTER CODE (to lock the system)
<i>Press and release</i> the SET button	Advances a digit on the ENTER CODE screen
<i>Press and hold</i> the SET button	Accepts a digit and displays the next digit position (if any remain) on the ENTER CODE screen
While SECURITY OFF is shown on the information display area, simultaneously <i>Press and hold</i> the MODE and SET button.	Allows user to change security code.

DIAGNOSTIC DISPLAY MODE

The diagnostic display mode is for informational purposes only. Your POLARIS dealer can perform all major repairs.

The diagnostic mode is accessible only when the check engine warning indicator is illuminated *and* a diagnostic code is active.



Do not stop the engine if you want to view the active code (failure code). Active codes cannot be retrieved if power is interrupted to the instrument cluster. The codes will become inactive codes if power is interrupted. Inactive codes are stored in the history of the unit. Please see your POLARIS dealer can help retrieve inactive codes.

Use the following procedure to view active codes.

1. Do not stop the engine.
2. *Press and hold* the center  button on the instrument cluster to enter the Options Menu.
3. *Press and release* the MODE button until DIAGCODE appears in the information display area. The Diagnostic display mode will appear in the Options Menu if there is an active trouble code.

TIP


When the diagnostic mode is displayed, the check engine warning indicator will begin to flash.

4. A set of two numbers will appear in the display.
 - The 2-6 digit suspect parameter number (SPN) in the information display area indicates which component is generating the fault code.
 - The 1-2 digit failure mode indicator (FMI) number in the odometer area indicates the fault mode, such as open or short circuit.
5. More than one fault may be active. Press and hold the SET button or SET switch for two seconds to toggle to the next active code. Repeat until all codes are retrieved.
6. See Diagnostic Trouble Codes for code definitions and failure descriptions.

POLARIS INTERACTIVE DIGITAL DISPLAY (PIDD)

The POLARIS Interactive Digital Display (PIDD) provides the rider with:

- Speedometer
- Tachometer
- Odometer
- 2 Trip Meters
- Fuel Level Indicator
- Coolant Temperature
- Battery Voltage
- Fuel Type Selection
- Vehicle Security
- Gear Indicator

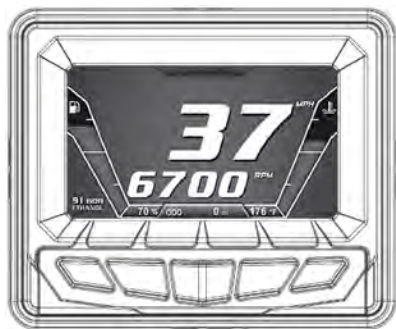


CAUTION

Use a microfiber hand towel to clean the LCD screen. Certain products will damage the screen and other plastic surfaces. Do not use alcohol to clean the display screen. Immediately clean off any gasoline that splashes on the instrument cluster.

NOTICE

The speedometer may give wrong values at the existence of electromagnetic radiation ≥ 10 V/m.

The PIDD also offers GPS mapping and Bluetooth® connectivity for compatible smartphones/devices. This feature will display text messages and missed phone calls on the display screen. The PIDD sub-menus and most display features are controlled by either the five button keypad on the PIDD or by the MODE/SET ① switch on the left hand control. Please see your PIDD Owner's Manual for more information. This manual is frequently updated for accuracy and new features.



GAUGE

FUEL TYPE SELECTION

When using the recommended 91 non-ethanol gasoline, always select the 91 NON-ETHANOL setting. When using ethanol, MTBE, or other forms of oxygenated gasoline, the fuel type must be changed to NON-PREMIUM/ETHANOL in the gauge.

IMPORTANT

Whenever in doubt of your fuel purchase, use the NON-PREMIUM / ETHANOL mode.

FUEL TYPE SELECTION

When using the recommended 91 non-ethanol gasoline, always select the 91 NON-ETHANOL setting. When using ethanol, MTBE, or other forms of oxygenated gasoline, the fuel type must be changed to NON-PREMIUM/ETHANOL in the gauge.



IMPORTANT


Whenever in doubt of your fuel purchase, use the NON-PREMIUM / ETHANOL mode.

Use the following procedure to change the fuel type designation in the gauge. Refer to the fuel type selection label located inside the left side panel.

1. Start the engine.
2. *Press and hold* the center  button to enter the Options Menu.
3. *Press and release* the MODE button until FUEL TYPE is displayed in the information display area.
4. *Press and release* the SET button to toggle through available options until the desired fuel type is displayed in the information display area.
5. To exit Options Menu, *Press and release* the MODE button until EXIT appears in the information display area.
6. *Press and release* the SET button to exit. The fuel type being displayed is the active fuel type.

POLARIS INTERACTIVE DIGITAL DISPLAY (PIDD)


If your model is equipped with the POLARIS interactive digital display (PIDD), please see your PIDD Owner's Manual for fuel type selection procedures.

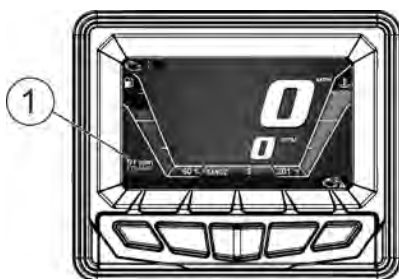

ENGINE OVERHEAT INDICATORS


OVER-TEMPERATURE INDICATOR (STANDARD CLUSTER)

The over-temperature indicator on the standard instrument cluster will *illuminate* when the engine is overheating. Take action to cool the engine. See page 39. The indicator will *flash* when engine temperature reaches critical levels. *Stop the engine immediately.*

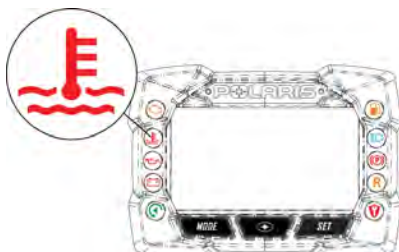

OVERHEAT WARNING (PIDD)

The engine temperature scale ② located on the right side of the PIDD screen changes to *RED* and the check engine temperature indicator ③ located on the top left of the screen illuminates when the engine is overheating. Take action to cool the engine. See page 39. The indicator will *flash* when engine temperature reaches critical levels. *Stop the engine immediately.*

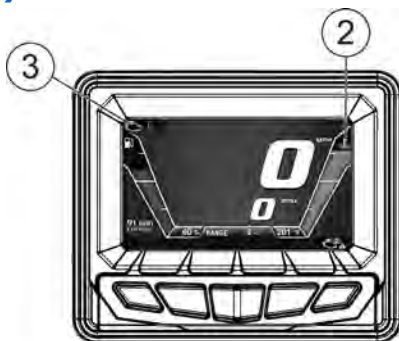

Please see your PIDD Owner's Manual for more information.

GAUGE

600/800 HO MODELS ENGINE TEMPERATURE PROTECTION MODES	
Hot Lamp	Threshold*
ON	Lamp illuminates: Idle = 201° F (94° C), WOT = 185° F (85° C)
FLASHING	Lamp Flashes, Engine Turns Off: Idle = 215.6° F (102° C), WOT = 201° F (94° C)
* Only the minimum (idle) and maximum (WOT) parameters are listed.	

ENGINE-COOLING ACTIONS

If the engine is overheating, promptly take action to cool the engine.

- Drive in loose snow.
- View the coolant level. *Do not open the pressure cap while the engine is hot.* Add coolant if the level is low.
- Stop the engine and allow it to cool down.
- Ensure radiator is clean and free of debris.

NOTICE

If you must continue to operate while the indicator light is *illuminated*, drive slowly and stop the engine frequently to allow it to cool down.

THE PERFECT FIT

SUSPENSION QUICK SET-UP GUIDE

SUSPENSION QUICK SET-UP GUIDE

The front and rear suspensions on your snowmobile are easy to adjust. Just remember three simple steps:

Step 1: Ride your snowmobile.

Ride the snowmobile in various terrain to fully experience the existing suspension settings before making any adjustments.

Step 2: Adjust the torsion spring to tune vehicle balance.

After riding, you should be able to determine if the snowmobile needs more or less transfer.

- For more transfer, *decrease* the torsion spring preload.
- For less transfer, *increase* the torsion spring preload.

If you prefer your snowmobile has lighter steering, decrease the torsion spring preload or increase the front track shock spring preload.

Step 3: Adjust shock clickers (if equipped) for ride quality.

For models equipped with monotube shocks, always adjust the rear torsion spring preload to enhance bottoming resistance.

For models with shock clickers, you can adjust the clickers to control bottoming and adjust ride comfort.

- Turn a clicker counter-clockwise to decrease damping for a softer ride.
- Turn a clicker clockwise to increase damping for a stiffer ride and less bottoming.

NOTE


Always adjust the clicker at least one click below full stiff (full clockwise) or shock damage could occur.

Test ride the snowmobile and continue making spring and clicker adjustments until you achieve the perfect ride.

NOTE

Adding traction components, such as traction studs or additional ski skag carbides, or changing the factory equipped track, could change handling characteristics. Addition setup may be required.

SHOCK LOCATIONS

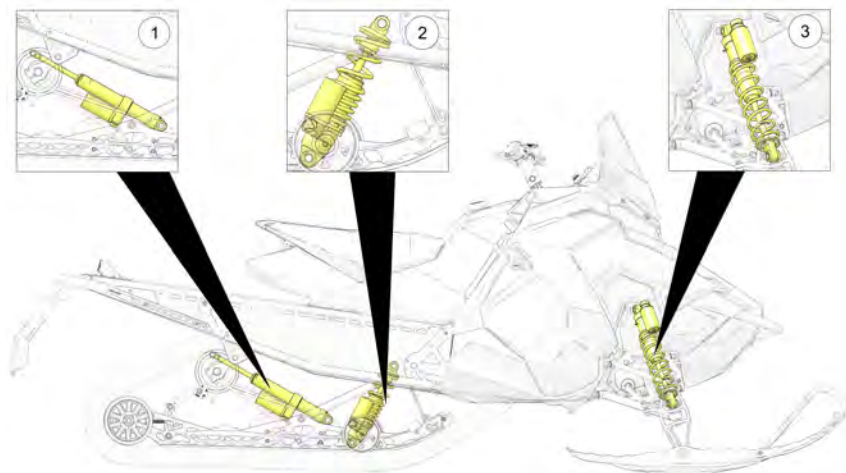

① Rear Track Shock

② Front Track Shock

③ Front IFS Shock

SHOCK COMPRESSION DAMPING


The primary adjustment for overall vehicle balance is torsion spring preload. Perform this adjustment first. After adjusting torsion spring preload to your satisfaction, compression damping adjustments can be made to control ride quality and bottoming resistance.

Compression damping can be adjusted at the front suspension and at the front and rear track shock. Make adjustments in 2-click increments, then test ride. When adjusting the front suspension, always adjust both clickers equally.

To stop bottoming of the front or rear suspension (stiffer ride), rotate the clicker (s) clockwise two clicks (as viewed from the top of the clicker), then test ride. Repeat the adjustment until bottoming stops and the desired ride quality is achieved.

For a more plush ride at the front or rear suspension, rotate the clicker(s) counter-clockwise two clicks, then test ride. Repeat the adjustment until the desired ride quality is achieved.

TORSION SPRING ADJUSTMENTS

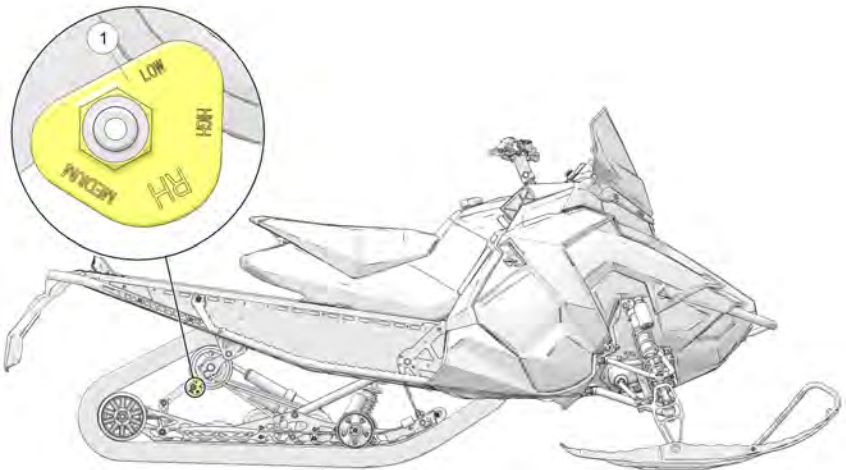

To adjust rear torsion spring preload, rotate the three-position cam ① using the engine spark plug tool. Adjustment is easiest when the cam is rotated from low to medium, and then to high. Rotating directly from low to high will require significantly more effort. Different rate torsion springs are available if a firmer ride is desired. See your dealer for more information.

NOTE

Adding 1+1 seat, or additional cargo may affect handling and require a spring rate change.

TORSION SPRING SETTING	RECOMMENDED USAGE
Low	Rider(s) and gear = 140-180lb If less than 140, use the optional spring chart for softer springs.
Medium	Rider(s) and gear = 180-220lb
High	Rider(s) and gear = 220-260lb If above 260, use the optional spring chart for heavier springs.


THE PERFECT FIT

OPTIONAL SPRINGS

If the correct balance cannot be obtained by adjusting the stock springs, please install the appropriate optional heavy or light springs listed below.

PART NUMBER	SPRING TYPE	DESCRIPTION
7043859-329	Spring, Torsion	LH Light Duty
7043860-329	Spring, Torsion	RH Light Duty
7045207-329	Spring, Torsion	LH Heavy Duty
7045208-329	Spring, Torsion	RH Heavy Duty
7045209-329	Spring, Torsion	LH Extra Heavy Duty
7045210-329	Spring, Torsion	RH Extra Heavy Duty

REAR TRACK SHOCK FACTORY CLICKER SETTINGS

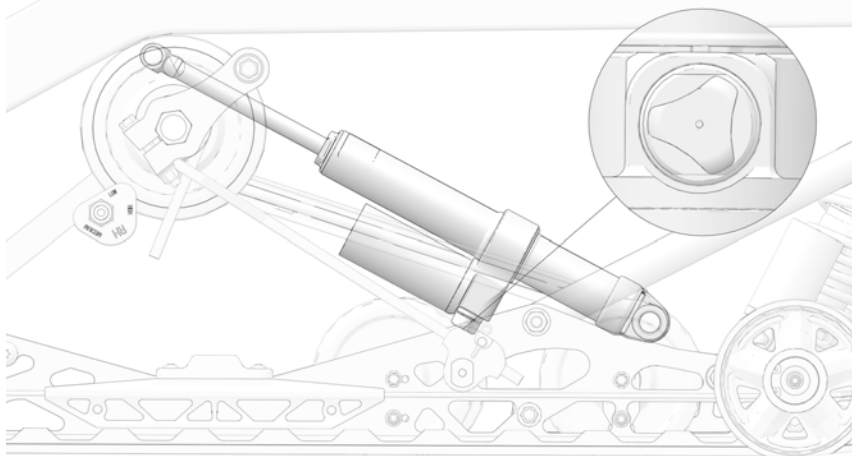

MODEL	FACTORY CLICKER SETTING (FROM FULL STIFF)
Indy XC	5


FRONT TRACK SHOCK SPRING SETTINGS

Factory settings, combined with user adjustments to the rear torsion spring, should be all that's necessary to provide the best riding experience for most riders. The primary adjustment for overall vehicle balance is the rear torsion spring preload. Perform this adjustment first.


Always perform shock spring preload adjustments with the weight of the vehicle removed from the shock and with the shock at full extension.

NOTICE

Never adjust spring preload to an installed length longer than the factory length or shorter than the minimum length as shown in the following chart. Damage to the suspension could result. When decreasing preload, make sure at least two turns of preload are holding the retainer against the spring.

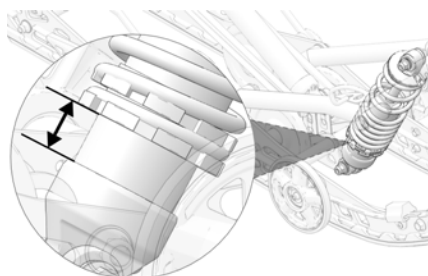

INDY SP

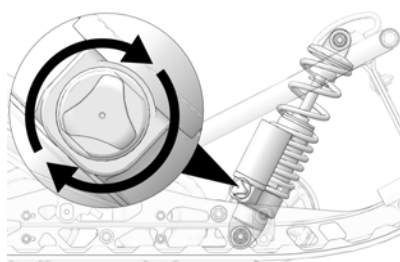

INDY XC

FRONT TRACK SHOCK SPRING SETTINGS

FACTORY SPRING	MAXIMUM INSTALLED LENGTH	MINIMUM INSTALLED LENGTH
INDY SP	1.25" (3.2 cm)	0.75" (1.9 cm)
INDY XC	1.5" (3.8 cm)	1" (2.5 cm)

FRONT TRACK FACTORY CLICKER SETTINGS



MODEL	CLICKER SETTING (FROM FULL HARD)
INDY SP	N/A
INDY XC	5

THE PERFECT FIT

FRONT SUSPENSION (IFS) SHOCK ADJUSTMENTS (IF EQUIPPED)

Always perform shock spring preload adjustments with the weight of the vehicle removed from the shock and with the shock at full extension.

To reset IFS clickers, rotate the clicker to full stiff, and then back off the same number of clicks for each shock.

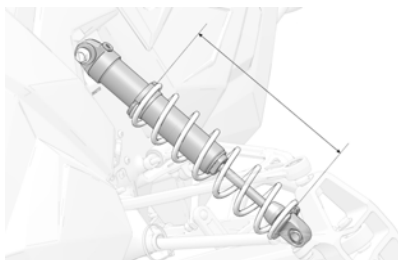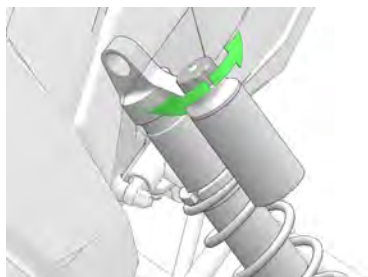

IFS SHOCK SPRING SETTINGS

FACTORY SPRING	FACTORY INSTALLED LENGTH	MINIMUM INSTALLED LENGTH
INDY SP	10.75" (27.3 cm)	10" (25.4 cm)
INDY XC	10" (25.4 cm)	10" (25.4 cm)

IFS REMOTE RESERVOIR SHOCK FACTORY CLICKER SETTINGS

MODEL	CLICKER SETTING (FROM FULL HARD)
INDY SP	N/A
INDY XC	12


CORNERING ADJUSTMENTS

To improve cornering ability, remove up to 1/2" of preload from factory IFS spring setting. Trade-off for removing 1/2" of preload will add steering effort.

LIMITER STRAP ADJUSTMENT

The front torque arm limiter strap is set at position ①.

POLARIS recommends leaving the limiter strap length at position ① to maintain the optimum ride characteristics of the snowmobile. Riders who desire less ski pressure and more weight transfer toward the rear of the snowmobile can lengthen the limiter strap by changing to position ②.

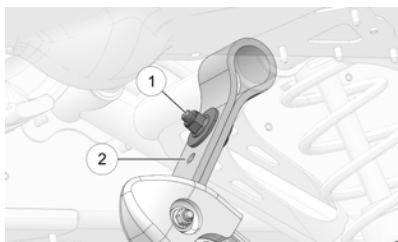

1. Loosen the lock nut.
2. Adjust the limiter strap.
3. Tighten the lock nut.

TORQUE


16 ft-lbs (21 Nm).

HANDLE BAR EXAMPLES

HANDLEBAR COMPONENT FASTENER TORQUES

IMPORTANT


Moving a handlebar component without first loosening its screws/set screws may cut grooves into the handlebar, making it difficult to secure the component. Do not move a handlebar component without first loosening its mounting screws/set screws. Take care to avoid damaging hand warmer/brake switch wires when moving components.

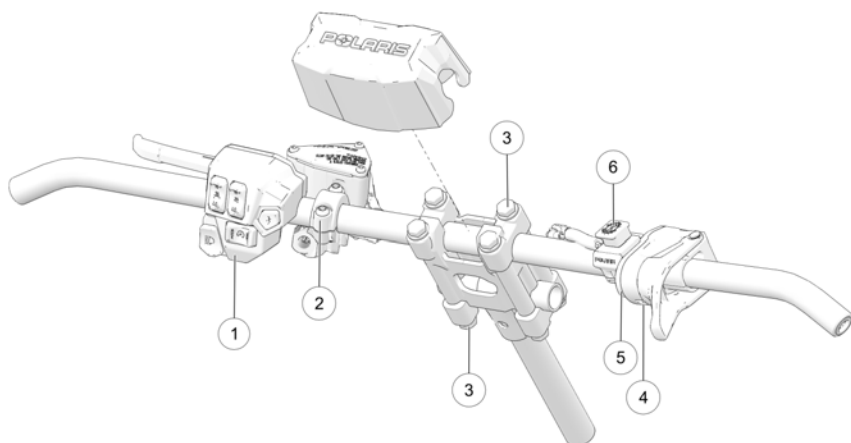

COMPONENT		TORQUE <i>DO NOT OVER-TIGHTEN</i>
①	Left Handlebar Control Block	20 in-lbs (2.3 Nm)
②	Brake Lever / Master Cylinder <i>Torque the front screw first, then torque the screw next to the reservoir.</i>	70 in-lbs (7.9 Nm)
③	Upper / Lower Riser Clamps	14.8 ft-lbs (20 Nm)
④	Throttle Lever Block Set Screw	27 in-lbs (3.1 Nm)
⑤	Throttle Lever Block Cover Screws	6 in-lbs (0.7 Nm)
⑥	Auxiliary Engine Stop Switch Set Screw	12 in-lbs (1.4 Nm)
⑦	Riser	Install with the "FWD" stamp facing toward the hood

COMPONENT		TORQUE <i>DO NOT OVER-TIGHTEN</i>
Not Shown	Hand Guard Mounts (if applicable)	Hand-Tight
Not Shown	Mountain Hoop Bar (if applicable)	10 ft-lbs (13.6 Nm)

HANDLEBAR ANGLE

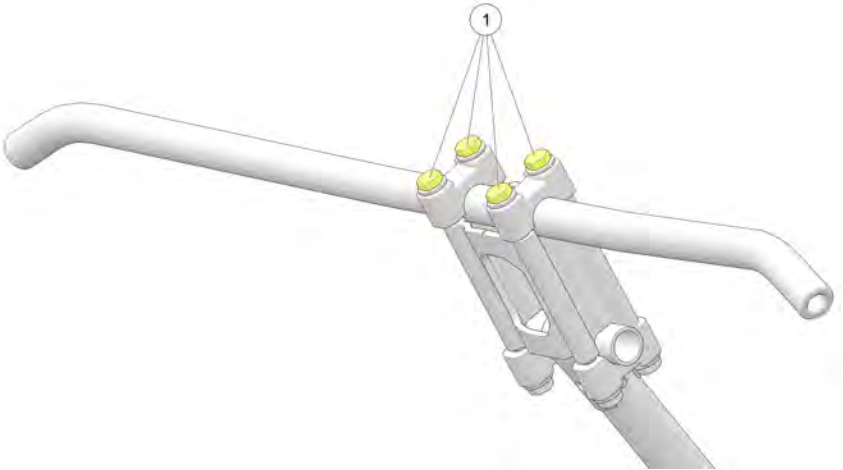

Handlebar angle can be adjusted to suit rider preference.

1. Loosen the four bolts on the top riser block ①.
2. Adjust the handlebar upward or downward to the desired angle. Be sure the handlebar, brake lever and throttle lever operate smoothly and do not hit the gas tank, windshield or any other part of the machine when turned fully to the left or right. If necessary, loosen the set screws for the left and right controls, rotate the controls *slightly*, then tighten the set screws to the proper torque.

NOTICE

Do not stretch wires while adjusting the controls. Stretching the wires could damage the handwarmers.

3. Tighten the bolts.

TORQUE


14.8 ft-lbs (20 Nm)

THE PERFECT FIT

RISER ANGLE

Riser angle can be adjusted to suit rider preference.

1. Loosen the four bolts on the bottom of the adjuster block ②. If necessary, pry the blocks apart with a screwdriver.
2. Adjust the riser forward or rearward to the desired position.
3. Tighten the bolts to 14.8 ft-lbs (20 Nm).

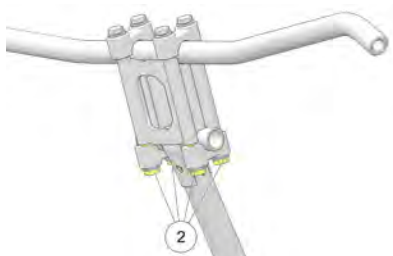

ADJUSTABLE RISER (IF EQUIPPED)

To adjust the riser (if equipped), do the following:

1. Release the riser clamp ①.
2. Adjust the handlebar upward or downward to the desired height.
3. Secure the riser clamp ①.



Periodically inspect the torque of the upper/lower handlebar clamp fasteners, and slide fasteners.

TORQUE

Handlebar Clamp Fastener Torque:

16 ft-lbs (21 Nm)

ROX Slide Fastener Torque:

16 ft-lbs (21 Nm)

Adjuster Cranks:


Hand Tight

LEFT HAND CONTROL ALIGNMENT

1. Loosen the brake master cylinder (A) mounting screws and move it away from the left hand control (B).

CAUTION

Take care to avoid damaging hand warmer/brake switch wires when moving components.

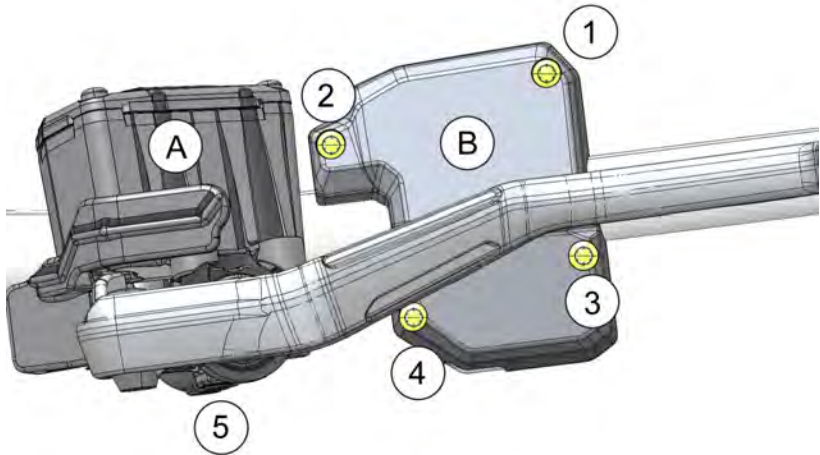

2. Loosen the four left hand control mounting screws.
3. Move the control block to the desired position.

NOTE

If the control is loose and was inadvertently moved without loosening the screws, move the control block slightly to the left or right to relocate the pins.

THE PERFECT FIT

4. Tighten the screws to specification in the sequence shown in the image. Do not over-torque.

TORQUE

24 in-lbs (2.7 Nm)


5. Return the master cylinder to its specified position. Make sure the clamp will not pinch the brake light signal wire. Tighten the clamp screws to specification beginning with the front screw first, then the screw next to reservoir. Do not over-torque.

TORQUE

70 in-lbs (7.9 Nm)

HANDLEBAR COMPONENTS

Refer to the following illustration and measurements to position handlebar components at factory-specified locations.

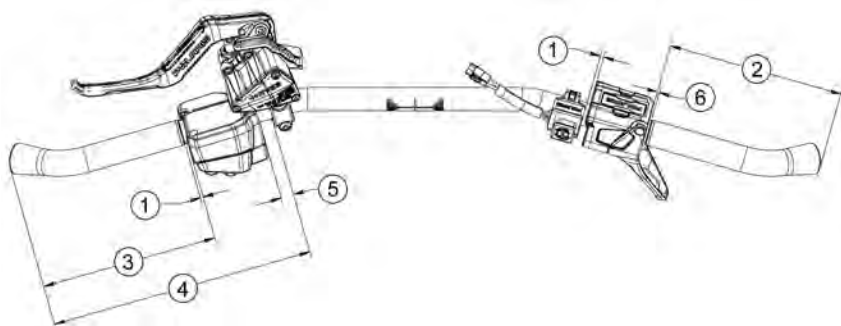

① .011 in. (3 mm)

② 6.65 in. (169 mm)

③ 6.7 in. (170 mm)

④ 10 in. (254 mm)

⑤ .47 in. (12 mm)


⑥ .08 in. (2 mm)

THROTTLE BLOCK ALIGNMENT

NOTICE

Take care to avoid damaging hand warmer wires when moving components.

1. Slightly loosen the set screw ① on the bottom of the housing.
2. Move the control block to the desired position.
3. Tighten the screw to specification. Do not over-torque.
4. With the engine off, test throttle lever movement after tightening the screw. See page 93.

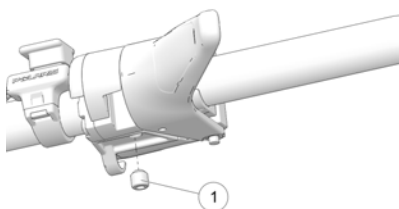

TORQUE

27 in-lbs (3 Nm)

ENGINE STOP SWITCH ALIGNMENT

CAUTION

The stop switch must be positioned in an easily accessible location.

1. Slightly loosen the set screw on the bottom of the housing ②.
2. Move the switch to the desired position.
3. Tighten the screw to specification. Do not over-torque.



TORQUE

12 in-lbs (1.4 Nm)

TRACTION PRODUCTS

TRACK STUDDING

Track studding will enhance braking control on hard-packed snow or ice, but extreme caution is still required on such surfaces. Steering ability may be reduced on hard-packed snow or ice.

When studded tracks are used, increased wear to the brake pads will result from increased braking and requires increased brake inspection intervals.

Installing studs can also cause the track to stretch more than a non-studded track. For this reason, POLARIS recommends inspecting track tension more often and setting the tension at the preferred measurement.

Always adhere to the manufacturer's stud maintenance procedures and stud nut torque specifications.

Before equipping your snowmobile with traction products, be aware of regulations pertaining to the use of traction products in your area of operation.

STUDS

Track damage resulting from improperly installed or maintained studs is not covered under warranty. Use only POLARIS-approved traction products on your snowmobile. See your dealer for more information about installing studs and/or carbides.


CAUTION

Failure to heed the following recommendations will result in tunnel or track damage:

- Use of studs longer than the recommended length on snowmobiles equipped with center coolers will result in center cooler damage or damage to the tunnel.
- Aggressive studding patterns may require grinding protruding stud bolts flush to prevent idler wheel damage. Maintain track tension on studded tracks on the tight side of the specification to prevent heat exchanger damage. The center of the stud must be at least 1 1/8 inch (2.9 cm) from any edge of the track, including track window.
- Studding the outside band of the track diminishes durability.
- Polaris does not recommend studs on the outside band of the Storm 150 track. Damage will occur.

The AXYS Indy 129 chassis requires stud protection kit 2883572 to be installed before installing studs or chassis damage will occur. This stud protection kit will protect against chassis damage with the following track/stud combinations.

- 1.325" Polaris/Woody's studs installed in a Ripsaw II 1.25" or Cobra 1.352" track .
- 1.575" Polaris/Woody's studs installed in a Storm 150 track, center band only.

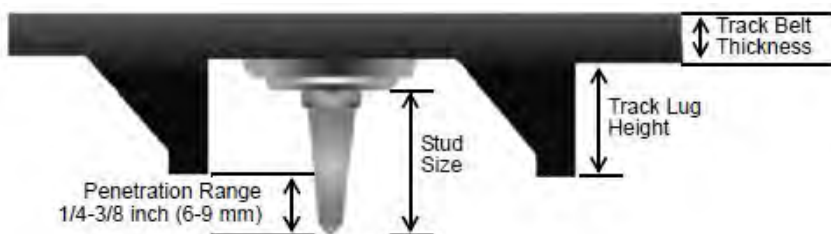

			MAXIMUM PENETRATION						
POLARIS Studs	Stud Length		1.25-Inch (3.2 cm) Track		1.352-Inch (3.4 cm) Cobra Track		Overall Installed Height		Recom- mended for AXYS models
	in.	cm	in.	cm	in.	cm	in.	cm	
Signature Series	1.325	3.4	.375	.95	.27	.7	1.58	4.0	YES
Signature Series	1.45	3.7	-	-	-	-	1.7	4.3	NO

CARBIDE SKAGS

A skag is a replaceable bar attached to the underside of the ski to assist in turning the snowmobile and to prevent ski wear caused by contact with roads and other bare terrain. Use carbide skags with studded tracks to help maintain proper steering and control. See page 126.

Maintain a proper balance between the number of studs and the length of carbide on the skags (the more studs you use, the longer the carbide on the skags should be). See your dealer's track studding chart.

PRE-RIDE INSPECTIONS

PRE-RIDE CHECKLIST

Inspect all items on the checklist for proper operation or condition before each use of the snowmobile. Procedures are outlined in the referenced sections.

ITEM	SEE SECTION
Drive Belt	page 118
Steering System	page 85
Recoil Rope	page 86
Coolant Level	page 110
Chaincase Oil Level (if equipped)	page 103
Injection Oil Level	page 92
Parking Brake Lock/Brake Lever/ Brake System	page 83, page 84, and page 114
Auxiliary Shut-Off Switch (Engine Stop Switch)	page 93
Ignition Switch	page 33
Headlight/Taillight/Brakelight	page 86
Suspension Mounting Bolts	page 82
Skags (Wear Bars)	page 126
Ski Saddle and Spindle Bolts	page 82
Hood and Side Panel Fasteners	page 106
Throttle Lever/Safety Switch	page 83 and page 83
Rear Wheel Idler Bolt	page 121
Tether Switch/Strap (if equipped)	page 86
Track Alignment/Condition	page 85 and page 122
Rail Slide Condition	page 127

PRE-RIDE INSPECTIONS

PRE-RIDE SUSPENSION INSPECTION

Loose nuts and bolts can reduce your snowmobile's reliability and cause needless repairs and down time. Before beginning any snowmobile trip, a visual inspection will uncover potential problems. Check the following items on a weekly basis or before any long trip.

ITEM	SEE SECTION
Check suspension mounting bolts for tightness.	-
Check rear idler wheel bolt for tightness.	page 121
Check rear idler adjusting bolt locknuts for tightness.	-
Check front torque arm limiter strap condition.	-
Check rail slide condition.	page 127
Check track tension.	page 121
Check ski runner/skag condition.	page 126
Check ski spindle bolts for tightness.	-
Check tie rod end nuts for tightness.	-

BEFORE STARTING THE ENGINE

Before starting the engine, always refer to all safety warnings pertaining to snowmobile operation. Never start the engine without checking all vehicle components to be sure of proper operation.

WARNING

Operating the vehicle with worn, damaged, or malfunctioning components could result in serious injury or death. Never start the engine without checking all vehicle components to be sure of proper operation.

READ AND UNDERSTAND YOUR OWNER'S MANUAL

Read the Owner's Manual completely and refer to it often. The manual is your guide to safe and enjoyable snowmobiling experience.

THROTTLE LEVER

The throttle and brake are the primary controls of your snowmobile. Always make sure both are functioning properly.

Squeeze the throttle lever to make sure it compresses evenly and smoothly. When released, the lever should immediately return to the idle position without binding or hesitation. If the throttle does not function smoothly, or if you discover excessive lever freeplay, DO NOT start the engine. Have the throttle serviced immediately.

THROTTLE SAFETY SWITCH


Test the throttle safety switch system before the snowmobile is operated.

BRAKES

Always check the following items for proper operation before starting the engine.

BRAKE LEVER TRAVEL

Squeeze the brake lever. It should move no closer to the handgrip than 1/2 inch (1.3 cm) ①. A smaller distance indicates low brake fluid level or air in the hydraulic system. Refer to the brake bleeding information on page . Your dealer can assist.

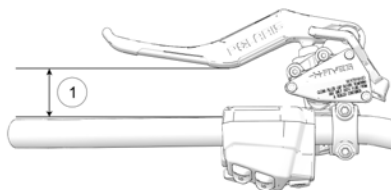

PRE-RIDE INSPECTIONS

LEVER FEEL

If the brake lever feels “spongy” when squeezed, check the brake fluid level and condition. Add fluid as needed. See page 115.


WARNING

Continued use of “spongy” brakes may cause a complete loss of brakes, which could result in serious injury or death. Always have the brakes serviced at the first sign of sponginess.

PARKING BRAKE LEVER LOCK

Use the parking brake lever lock only when you want the snowmobile to remain stationary; for example, when parked on an incline for a period of five minutes or less.

1. Brake Lever
2. Parking Brake Lever Lock
3. Master Cylinder Reservoir/Cover

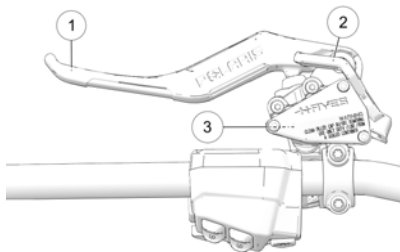

LOCK ENGAGEMENT

To engage the lock, squeeze the brake lever tightly and push forward on the lock. Hold the lock forward while releasing the brake lever.

NOTE

If the brake lever is squeezed tightly enough, the lock will move freely into place. Do not force the lock or it may break.

The parking brake light on the gauge will light up if the parking brake lever lock is set while the engine is running. It will also be lit when the service brake is in use. If the parking brake light does not come on when the parking brake or service brake is in use, have it serviced by your dealer.

LOCK RELEASE

To release the lock, squeeze the brake lever tightly. The lock will return to the unlocked position.

WARNING

If the parking brake lever lock is partially or entirely engaged while riding, the brakes may overheat, resulting in brake damage. In extreme cases it could cause a fire, which could result in serious injury or death. Always ensure that the lever lock is completely disengaged before operating the snowmobile.

STEERING SYSTEM

WARNING

Ice and snow build-up may interfere with the steering of your snowmobile, resulting in serious injury or death. Keep the underhood area free of snow and ice.

Before driving, manually turn the skis to the left and right to be sure ice and snow are not interfering with full left and right steering. If difficulty is encountered, remove ice and snow build-up that may be obstructing the steering linkage.

TRACK

Track damage or failure caused by operation on ice or poor lubrication conditions voids the track warranty.

WARNING

Operating the snowmobile with a damaged track increases the possibility of track failure, which could cause loss of control resulting in serious injury or death. Always inspect the track for damage before using the vehicle.

WARNING

Use of traction products such as studs increases the possibility of track damage and/or failure. Driving at high speeds for extended periods of time in marginal lubrication could severely damage track rods, break track edges, and cause other track damage. Examples of marginal lubrication would include frozen bodies of water without snow cover, icy trails, and no-snow conditions.

PRE-RIDE INSPECTIONS

HOOD AND SIDE PANEL FASTENERS

The hood and side panels of the snowmobile protect the operator from moving parts. Never operate a snowmobile with the hood or side panels open or removed. Always ensure that the hood and side panels are securely in place before starting the engine.

RECOIL ROPE

Inspect the recoil rope and handle for excessive wear, and make sure the knot securing the rope inside the handle is secure. If excessive wear is found, your POLARIS dealer can provide a replacement.

START THE ENGINE AND CHECK

Before starting the engine, always refer to all safety warnings pertaining to snowmobile operation. Never engage the starter when the engine is running. Never start the engine without checking all vehicle components to be sure of proper operation. See page 83.

ENGINE STOP SWITCH

Check the auxiliary shut-off switch for proper operation. Push the switch down to stop the engine. Pull it up to allow restarting.

IGNITION SWITCH

Make sure the engine stops when the ignition switch is turned to OFF.

TETHER SWITCH (IF EQUIPPED)

If your snowmobile has a tether switch, remove the tether from the switch to make sure the engine stops immediately.

LIGHTING

Check the headlight (high and low beam), taillight, and brake light. Replace burned out lamps before operating.

MIRRORS (IF EQUIPPED)

Adjust the mirrors so they can be used to their full advantage.

OPERATING AREA

Before driving away, check your surroundings. Be aware of obstacles and make sure bystanders are a safe distance from the snowmobile.

OPERATION

STARTING THE ENGINE

CAUTION

Engaging the starter when the engine is running **WILL** result in serious engine damage, especially if the engine is in reverse. Never engage the starter when the engine is running.

1. Turn the key to the ON position.
2. Pull the engine stop switch up to the RUN position.
3. If equipped with electric start, turn the key to START to crank the engine. Release the key to the ON position when the engine starts.
4. If not equipped with electric start, grasp the starter handle and pull slowly until the recoil engages; then pull abruptly to crank the engine.
5. If the engine does not start after several attempts, slightly depress the throttle no more than 1/4 inch (2.54 cm) open while cranking the engine. When the engine starts, *immediately* release the throttle.

CAUTION

To avoid injury and/or engine damage, do not operate the electric starter or pull-rope starter while the engine is running.

NOTICE

Operating the vehicle immediately after cold starting could cause engine damage. Allow the engine to warm up for several minutes before operating the vehicle. If cold drive-away is attempted, the engine RPM may stumble slightly to protect the engine.

RESTARTING AN ENGINE

If the rider stops the engine by pushing the engine stop switch down, restart the engine using the normal starting procedure. If the engine fails to start using the normal procedure:

1. Push the engine stop switch down to the OFF position.
2. Turn the key to the OFF position.
3. With both switches OFF, squeeze and hold the throttle in the wide open position.
4. Crank the engine several times to clear the engine.

OPERATION

5. Release the throttle.
6. Restart the engine using the normal starting procedure.

BREAK-IN PERIOD

ENGINE BREAK-IN

The recommended break-in period is the time required to use the first full tank of fuel.

Excessive heat build-up during the first three hours of operation will damage close-fitted engine parts. Do not operate at full throttle or high speeds for extended periods during the first three hours of use. Vary the throttle openings and vehicle speeds to reduce friction on all close-fitting machined parts, allowing them to break in slowly without damage.

The engine management system utilizes both a fuel injector break-in period and oil pump enrichment program. The duration of these break-in programs is independent of each other and is timed out based on engine run time. Regardless of these automatic engine break-in and enrichment features, the following engine break-in procedures must be performed when the engine is new or overhauled.

NOTE

During this period of increased oiling, sled performance will not be affected and you should ride normally.

BREAK-IN FUNCTION	ENGINE RUN TIME	DESCRIPTION
Fuel Injectors	2 Hours	Additional fuel
600 Models Oil Pump Enrichment Period	5 Hours *	Enriched oil supply to engine
800 Models Oil Pump Enrichment Period	18 Hours *	
* = Total engine run time above 5,500 RPM		

OIL RECOMMENDATIONS

First Tank of Fuel:	POLARIS VES 2-Cycle Oil
After Break-in:	POLARIS VES 2-Cycle Oil
Extreme Arctic Conditions, sustained temperature is at or below -40° F (-40° C)	VES Extreme 2-Cycle Oil

Never mix brands of oil. Serious chemical reactions can cause injection system blockage, resulting in serious engine damage. Oils may also be incompatible and the result could be sludge formation, filter blockage, and reduced cold weather flow rates. All POLARIS oils are compatible with each other.

NOTICE

Use of any lubricants other than those recommended by POLARIS may cause serious engine damage. We recommend the use of POLARIS lubricants for your vehicle.

Drive with extra caution during the break-in period. Perform regular checks on fluid levels, lines, and all other important areas of the snowmobile.

OIL INJECTION SYSTEM

Always check and fill the oil bottle when refueling.

NOTICE

Serious engine damage can occur without the proper lubrication. Check the oil bottle level often during the first tank of fuel. If the oil level doesn't go down, your dealer can assist.

DRIVE BELT BREAK-IN

The break-in period for a new drive belt is 30 miles (48 km). During this time, vary the throttle position under 50% and limit full throttle use.

New drive belts should be washed with warm, soapy water and allowed to air dry prior to use.

Always take time to warm up the belt and driveline prior to operating the snowmobile. Free the track and skis from the ground before engaging throttle.

TRACK WARM-UP

WARNING

A loose track or flying debris could cause serious injury or death. Stand clear of the front of the snowmobile and the moving track. Never hold the snowmobile up or stand behind it while warming up the track. Do not use excessive throttle during warm-up or when the track is free-hanging. Use a stable rear support.

WARNING

Use of traction products such as studs, ice growlers, etc. will increase the possibility of track damage and/or failure. This could cause loss of control, resulting in serious injury or death. Always inspect for track damage before operating the snowmobile.

Follow these steps to ensure proper warm-up of the engine, drive train and track.

1. Use an appropriate stand to securely support the rear of the snowmobile at the rear bumper. The track should be about 4 inches (10 cm) off the ground.
2. Start the engine and allow it to warm up two to three minutes.
3. Depress the throttle abruptly and allow the track to rotate several revolutions.

TIP

It will take longer to warm up the track sufficiently during colder outdoor temperatures.

4. Release the throttle, apply the brakes, shut off the engine and lower the snowmobile to the ground.
5. Grasp the skis by their front loops and move them from side to side to loosen snow and ice.

SLIDE RAIL AND TRACK COOLING

NOTICE

Inadequate cooling and lubrication will lead to overheating of the slide rail and track, resulting in premature wear and failure. Reduce speeds and frequently drive into fresh snow to allow adequate cooling and polishing of the slide rail and track surfaces. Avoid operating on ice, hard-packed surfaces or roads.

FUEL

WARNING

Gasoline is highly flammable and explosive under certain conditions.

- Always exercise extreme caution whenever handling gasoline.
- Always refuel outdoors or in a well-ventilated area.
- Always turn off the engine before refueling.
- Do not overfill the tank. Do not fill the tank neck.
- Do not smoke or allow open flames or sparks in or near the area where refueling is performed or where gasoline is stored.
- If gasoline spills on your skin or clothing, immediately wash it off with soap and water and change clothing.
- Never start the engine or let it run in an enclosed area. Engine exhaust fumes are poisonous and can cause loss of consciousness or death in a short time.

WARNING

The engine exhaust from this product contains chemicals known to cause cancer, birth defects or other reproductive harm. Operate this vehicle only outdoors or in well-ventilated areas.

FUEL RECOMMENDATION

For peak performance, POLARIS recommends the use of 91 octane fuel or higher, with no ethanol. Although 87 octane fuel is usable, some engine performance will be lost and fuel economy will decrease. Do not use lower than 87 octane fuel.

IMPORTANT

Do not use fuel containing more than 10% ethanol. Never use E85 or 88 E15 fuel in your snowmobile.

NOTICE

Operating with obstructed fuel systems will result in serious engine damage. Perform maintenance as recommended. Prolonged exposure to petroleum based products may damage paint. Always protect painted surfaces when handling fuel.

OPERATION

FUEL SYSTEM DEICERS

If you use non-ethanol fuel (sometimes labeled “non-oxygenated”), POLARIS recommends the regular use of isopropyl-based fuel system deicer. Add one to two ounces per gallon (8-16 ml per liter) of gasoline to prevent damage resulting from fuel system icing. Never use deicers or additives containing methanol. POLARIS recommends the use of Carbon Clean.


If you use fuel with up to 10% ethanol (sometimes labeled “oxygenated”) do not add deicers or additives that contain any form of alcohol.

OIL

LOW OIL LEVEL

Always maintain the oil level between the “add” mark and the bottle neck. Do not fill the bottle neck.

1. Immediately stop the engine if the low oil indicator light comes on.
2. Open the left side panel.
3. View the oil level in the oil bottle.
4. Add oil as needed before operating.

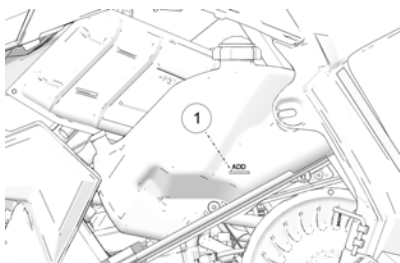

NOTICE

Operating the snowmobile without adequate engine lubrication can result in serious engine damage. Always check the oil level when refueling. Add oil as needed.

The oil bottle cap is vented to allow proper oil flow. Your POLARIS dealer can assist with recommended replacement parts.

THROTTLE LEVER

WARNING

An improperly functioning throttle lever may cause erratic snowmobile behavior and loss of control, which could result in serious injury or death. If the throttle lever does not work properly, DO NOT start the engine.

If the engine stops abruptly when the throttle lever is released:

1. Turn the ignition switch to OFF.
2. Visually inspect the throttle cable and carburetor/throttle body to determine what caused the safety switch to activate.


3. Test the throttle lever by compressing and releasing it several times. The lever and cable must return to the idle position quickly and completely.
4. If the throttle lever operates properly, turn the ignition switch on and go through normal starting procedures.
5. If the engine doesn't start, your authorized POLARIS dealer can perform this service.

Excessive freeplay in the throttle cable may cause the safety switch to activate, preventing the engine from starting. If this occurs, return the snowmobile to an authorized POLARIS dealer for service.

If an emergency exists and it's necessary to start the engine, the throttle safety switch and engine stop switch may be disconnected from the wire harness. When these switches are disconnected, the ignition key switch must be used to shut off the engine. DO NOT continue to operate the snowmobile with the throttle safety switch disconnected. Return the snowmobile to an authorized POLARIS dealer for service as soon as possible.


ENGINE STOP SWITCH

Push down on the engine stop switch ① to ground out the ignition and stop the engine quickly. Pull the switch up to the ON position to allow restarting.

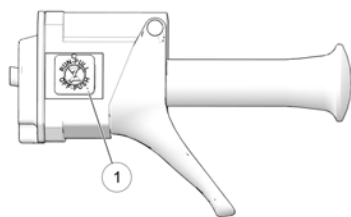

THROTTLE SAFETY SWITCH

The throttle safety switch is designed to stop the engine whenever all pressure is removed from the throttle lever and the throttle cable or valves do not return to the normal closed position.

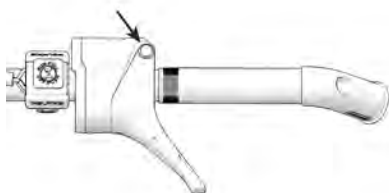

OPERATION

WARNING

Operating the snowmobile with a faulty throttle safety switch can result in serious injury or death in the event of an accident. If the throttle safety switch does not shut off the engine during a carburetor/throttle system malfunction, immediately push down the engine stop switch. Do not start the engine again until the malfunction has been corrected by your dealer.

Test the throttle safety switch system daily before operation.

1. Sit on the seat.
2. Start the engine and allow it to idle.
3. Hold the throttle lever pin stationary by exerting pressure on the pivot pin in the direction shown in the illustration.
4. Apply a slight amount of throttle. A properly functioning switch must shut down the engine.

POLARIS ELECTRONIC REVERSE CONTROL (PERC)

WARNING

Improper reverse operation, even at low speeds, may cause loss of control, resulting in serious injury or death. Damage will occur to the chaincase or transmission if shifting is attempted when the engine is operating above idle speed.

- Shift to or from reverse only when the snowmobile is stopped and when engine speed is at idle.
- Look behind the vehicle before and while backing.
- Avoid sharp turns.
- Apply throttle slowly.

Electronic reverse will activate only if the engine RPM is below 3000.

CAUTION

Engaging the starter when the engine is running WILL result in serious engine damage, especially if the engine is in reverse. Never engage the starter when the engine is running.

ENGAGING REVERSE

1. Stop the snowmobile and leave the engine idling.
2. Make sure the area behind your vehicle is clear.
3. Push the yellow reverse button on the left-hand control for one second, then release. The engine will automatically reduce RPM and start a reverse rotation. A flashing reverse light on the instrument panel will indicate that the transmission is in reverse.
4. Apply the throttle slowly to make sure the transmission is in reverse. The maximum engine RPM will be 5000 when in reverse.

TIP

If the engine stops running, the snowmobile will be in forward gear when it's restarted.

DISENGAGING REVERSE

1. Stop the snowmobile and leave the engine idling.

CAUTION

Engaging the starter when the engine is running WILL result in serious engine damage, especially if the engine is in reverse. Never engage the starter when the engine is running.

2. Push the yellow reverse button for one second and release. The engine will slow and begin to rotate forward. The light on the instrument panel will shut off.
3. Apply the throttle slowly to make sure the vehicle is in forward.

EMERGENCY STOPPING

The following chart lists methods for stopping the snowmobile in the event of an emergency.

SYSTEM	WHAT IT DOES
Ignition Switch	Interrupts ignition circuit
Brake	Slows jackshaft
Engine Stop Switch	Interrupts ignition circuit
Throttle Safety Switch	Interrupts ignition circuit
Tether Switch (Option)	Interrupts ignition circuit

OPERATION

DAILY STORAGE

At the end of each ride, park the snowmobile on a level surface and support it at the rear with an appropriate track stand. The track should be suspended approximately 4 inches (10 cm) off the ground.

Remove the key and cover the snowmobile.

TOWING

For your safety, do not attempt to use a tow hitch until you've read the following warnings and understand the proper hitch functions.

WARNING

Objects towed with a rope have no braking power and can easily collide with the rear of the snowmobile or other objects, resulting in serious injury or death.

DO NOT tow toboggans, sleds, saucers, or any type of vehicle with a rope.

Only a stiff metal pole connecting the towed object and the tow hitch on the snowmobile should be used. If passengers are to be towed on a toboggan or sled, make sure the pole is at least four feet (1.2 meters) long to prevent any possibility of contact between the snowmobile's track and a person riding in the towed object.

WARNING

Braking distances increase when towing loads. Slow down to maintain control of the snowmobile.

If the snowmobile becomes inoperable and must be towed, and if it isn't possible to use a rigid tow bar, attach the tow rope to the ski spindles (not to the ski loops) to prevent damage to the steering components. Remove the drive belt before towing, and have someone ride on the towed snowmobile to operate the brake and steering when necessary.

NOTICE

Towing a disabled snowmobile with the drive belt in place can result in serious damage to the engine and drive system. Always remove the drive belt from a disabled snowmobile before towing.

MAINTENANCE

EMISSION CONTROL INFORMATION

Any qualified repair shop or qualified person may maintain, replace, or repair the emission control devices or systems on your snowmobile. An authorized POLARIS dealer can perform any service that may be necessary for your vehicle. POLARIS also recommends POLARIS parts for emissions related service, however equivalent parts may be used for such service. It is a potential violation of the Clean Air Act if a part supplied by an aftermarket parts manufacturer reduces the effectiveness of the vehicle's emission controls. Tampering with emission controls is prohibited by federal law.

EMISSION CONTROL LABEL

Your snowmobile is equipped at the time of sale with an emission control information (ECI) label and a factory-installed emissions information hangtag. These items are required by U.S. Environmental Protection Agency regulations. The ECI label is permanently affixed to either the right side of the tunnel or the engine recoil cover. The ECI label should not be removed, even after you purchase the snowmobile. You may remove the factory-installed emissions information hangtag, which is intended solely for your use in making a purchasing decision.

EMISSION CONTROL MAINTENANCE REQUIREMENTS

Your snowmobile is certified to operate on gasoline with a minimum octane level of 87 (R+M)/2. If your snowmobile is equipped with a check engine light and it comes on, you must take your snowmobile to a qualified dealer for diagnostic service. Specifications and adjustments for engine tune-ups are located in the Service Manual, which is available to your qualified service technician. Reverse (if equipped) must not be engaged during engine tune-ups.

OWNER'S RESPONSIBILITIES

Please read the Snowmobile Engine Emissions Limited Warranty, and read the maintenance section of your owner's manual. You are responsible for ensuring that the specified maintenance is performed. POLARIS recommends that you contact an authorized POLARIS dealer, or other qualified person, to perform any service that may be necessary.

NON-IONIZING RADIATION

This vehicle emits some electromagnetic energy. People with active or non-active implantable medical devices (such as heart monitoring or controlling devices) should review the limitations of their device and the applicable electromagnetic standards and directives that apply to this vehicle.

POLARIS RECOMMENDED MAINTENANCE PROGRAM

NOTICE

Hot components can cause damage to plastic. Always make sure the exhaust system and engine have cooled before tipping the snowmobile on its side for service or inspection.

To ensure many trouble-free miles of snowmobiling enjoyment, follow recommended regular maintenance and perform service checks as outlined in this manual. Record maintenance and service in the Maintenance Log beginning on page 169.

The recommended maintenance schedule on your snowmobile calls for service and maintenance inspections at 150 miles (240 km), 500 miles (800 km) and 1000 miles (1600 km). These inspections should be performed by a qualified service technician. For continued optimum performance and component life, continue maintenance checks at 1000 mile (1600 km) intervals.

All necessary replacement parts and labor incurred, with the exception of authorized warranty repairs, become the responsibility of the registered owner.

If, during the course of the warranty period, part failures occur as a result of owner neglect in performing recommended regular maintenance, the cost of repairs are the responsibility of the owner.

Personal safety is critical when attempting to service or make adjustments to your snowmobile. If you're not familiar with safe service or adjustment procedures and the use of tools, or if you don't feel comfortable performing these tasks yourself, your authorized POLARIS dealer can provide any needed service.

PERIODIC MAINTENANCE CHART

The following chart is a guide based on average riding conditions. You may need to increase frequency based on riding conditions. When inspection reveals the need for replacement parts, always use genuine Polaris parts.

PERIODIC MAINTENANCE SCHEDULE					
ITEM	FREQUENCY / INTERVALS				
	150 MI. (240 KM)	500 MI. (800 KM)	1000 MI. (1600 KM)	2000 MI. (3200 KM)	PRE- SEA- SON
L = LUBRICATE / I = INSPECT OR ADJUST / R = REPLACE / C = CLEAN					
Drive / Driven Clutch					
Clutch Alignment / Offset		I	I	I	I
Drive Belt Condition / Ride Out	Pre-Ride Inspection				I
QUICKDRIVE Belt (If Equipped)	I	I	I	R	I
Drive / Driven Clutch Condition	I	C	I	I	C
Drive Belt Tension		I	I	I	I
Engine					
Engine Mounts		I	I	I	I
Recoil Handle / Rope / Function		I	I	I	I
Cylinder Head Bolts		I	I	I	
Cylinder Base Nuts		I	I	I	
Ignition Timing BTDC		I	I	I	
Spark Plugs		I	I	R	I
Exhaust Pipe				I	I
Exhaust System Retaining Springs		I	I	I	I
VES System (600 Engine Only)			C (clean at 1500 MI/2414 KM)		I
Coolant Level	Pre-Ride Inspection				I
50/50 Extended Life Coolant	Replace every 5 years				
60/40 Coolant (If applicable)	Replace every 2 years				
Cooling Hoses / Pipes		I	I	I	I
Brake System					
Brake Lever	Pre-Ride Inspection				
Hose Condition / Routing		I	I	I	I

MAINTENANCE

PERIODIC MAINTENANCE SCHEDULE					
ITEM	FREQUENCY / INTERVALS				
	150 MI. (240 KM)	500 MI. (800 KM)	1000 MI. (1600 KM)	2000 MI. (3200 KM)	PRE- SEA- SON
L = LUBRICATE / I = INSPECT OR ADJUST / R = REPLACE / C = CLEAN					
Fluid Level / Leaks / Fluid Condition		I	I	I	I
Brake Pads / Brake Disc		I	I	I	I
Parking Brake	Pre-Ride Inspection				
Brake System					I
Brake Fluid				R	
Fuel System					
Throttle Lever / Throttle Cable	I	I	I	I	I
Fuel / Vent Hoses		I	I	I	I
Oil Hoses			I	I	I
Air Box	I	I	I	I	I
Electrical System					
Auxiliary Shut-Off	Pre-Ride Inspection				I
Throttle Release Switch	Pre-Ride Inspection				I
Ignition Switch	Pre-Ride Inspection				I
Headlights / Brake light / Taillights	Pre-Ride Inspection				I
Hand / Thumbwarmers	Pre-Ride Inspection				I
PERC Reverse System	Pre-Ride Inspection				I
Chassis / Suspension					
Ski Toe Alignment		I	I	I	
Front / Rear Suspension Mounting Bolts	Pre-Ride Inspection				
Steering Fasteners / Linkage / Handlebars	Pre-Ride Inspection				
Ski Fasteners	Pre-Ride Inspection				C
Ski Skags	Pre-Ride Inspection				
Hood / Side Panel Fasteners	I	I	I	I	I
Drive Chain Tension (If Equipped)	I	I	I	I	I
Chaincase Oil (If Equipped)	I	R	I	R	I

PERIODIC MAINTENANCE SCHEDULE					
ITEM	FREQUENCY / INTERVALS				
	150 MI. (240 KM)	500 MI. (800 KM)	1000 MI. (1600 KM)	2000 MI. (3200 KM)	PRE- SEA- SON
L = LUBRICATE / I = INSPECT OR ADJUST / R = REPLACE / C = CLEAN					
Track Alignment / Track Tension	I	I	I	I	I
Front Limiter Strap	I	I	I	I	I
Rail Slide Condition	I	I	I	I	I
Rebuildable IFP Shock Oil				R	
Rear Shock Threads					L
Bogie / Wheel Condition / Fastener Bolts	I	I	I	I	I
Rear Idler Wheel Bolts	I	I	I	I	I
Rear Idler Adjuster Bolt Jam Nuts	I	I	I	I	I
Cooling Fins and Shroud		I	I	I	I
Camber Alignment		I	I	I	
Handlebar Centering					I
Hood / Seat / Chassis / Engine Compartment		C			C


MAINTENANCE

LUBRICATION

REAR SUSPENSION

Lubricate the suspension pivot shafts with POLARIS All Season Grease at the intervals outlined in the Periodic Maintenance Table beginning on page 99 and before seasonal storage. When operating in heavy, wet snow conditions, lubricate every 500 miles (800 km).

Lack of lubrication will adversely affect your ride and the life of the suspension. For more information about suspension lubrication and adjustments, see your POLARIS dealer.

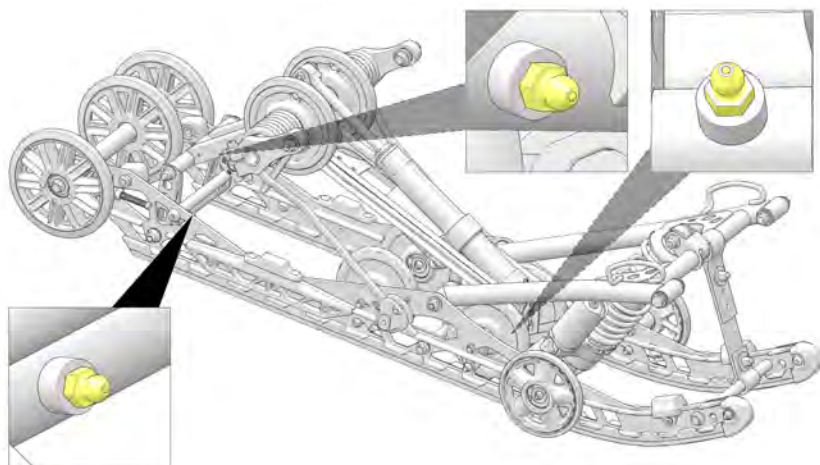

CHAINCASE OIL (IF EQUIPPED)

Check and change the chaincase oil at the intervals outlined in the maintenance charts beginning pages. Maintain the oil level at the top of the fill plug hole. POLARIS recommends the use of POLARIS Synthetic Chaincase Lube, or equivalent product.

OIL LEVEL CHECK

1. Position the snowmobile on a level surface.
2. Remove the fill plug.
3. Using a funnel, slowly add the recommended oil until the fluid begins to overflow.
4. Clean the area with a clean, dry shop towel. Reinstall the fill plug.


TORQUE

4-4.9 ft-lbs (5.4-6.6 Nm)

OIL CHANGE (PUMP METHOD)

NOTE

This procedure requires the use of a commercially available hand pump oil extractor.

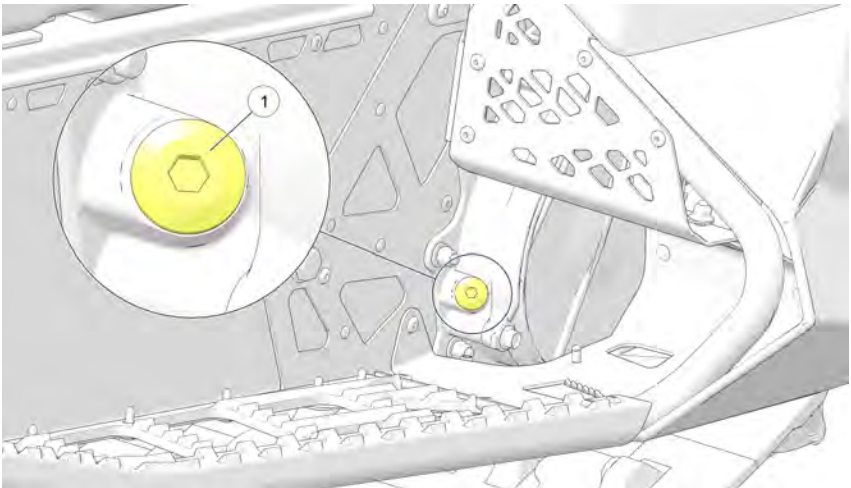

MAINTENANCE


1. Elevate the front of the snowmobile using a floor jack or appropriate lift.
2. Remove the fill plug. Clean all metal shavings off the plug.
3. Insert the tube of a hand pump oil extractor into the fill hole. Direct the hose toward the bottom front area of the cover, away from the chain/sprocket.
4. Extract the oil from the chaincase.
5. Lower the snowmobile.
6. Using a funnel, slowly add the recommended oil until the fluid begins to overflow. Maximum fluid capacity is 10.5 oz. (310 ml).
7. Clean the area with a clean, dry shop towel.
8. Reinstall the fill plug.

TORQUE

4-4.9 ft-lbs (5.4-6.6 Nm)

OIL CHANGE (COVER DRAIN METHOD)

1. Position the snowmobile on a level surface.
2. Remove the two (2) screws securing the fender to the chaincase ①.

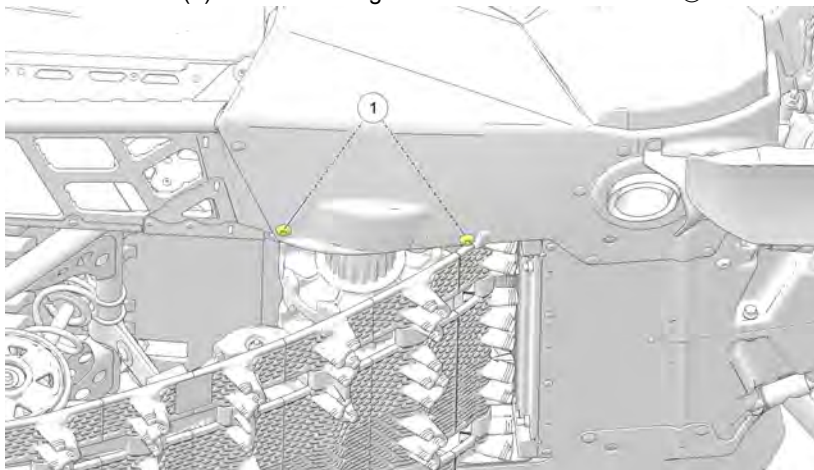

3. Remove the right side panel. If equipped with a battery, remove the battery.
4. Place a drain pan under the chaincase.

5. Loosen (do not remove) the three (3) chaincase cover screws ②.



6. Carefully pry the cover open.

NOTICE


DO NOT insert a screwdriver or pry bar between the cover and chaincase.
Seal damage may occur.

7. Allow the oil to drain completely.
8. Tighten the cover screws ②.

TORQUE

6-10 ft-lbs (8-13 Nm)

9. Remove the fill plug ③. Clean all metal shavings off the plug.

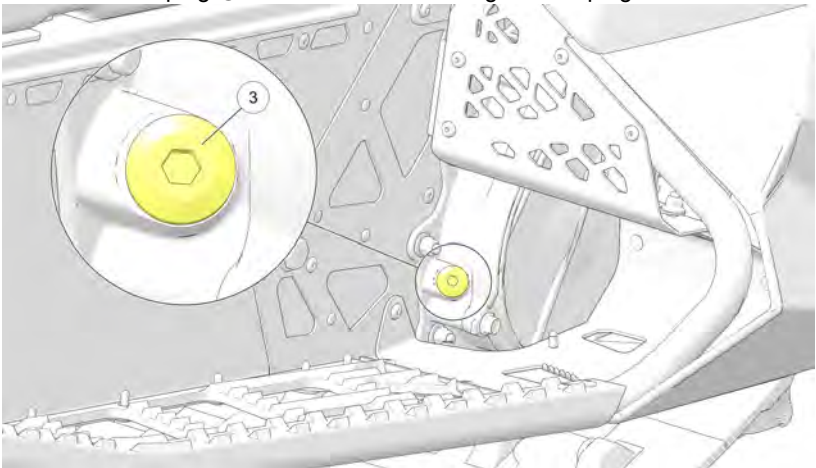

MAINTENANCE

10. Using a funnel, slowly add the recommended oil until the fluid begins to overflow. Maximum fluid capacity is 10.5 oz. (310 ml).
11. Clean the area with a clean, dry shop towel.
12. Reinstall the fill plug ③.

TORQUE

4-4.9 ft-lbs (5.4-6.6 Nm)

13. Reinstall the battery(if equipped).
14. Reinstall the screws securing the fender to the chaincase.

OIL LINES

Inspect oil line condition every 1000 miles (1600 km).


SIDE PANEL/HOOD

CAUTION



The hood and side panels of the snowmobile protect the operator from moving parts. Never operate a snowmobile with the hood or side panels open or removed. Always ensure that the hood and side panels are securely in place before starting the engine

SIDE PANELS

To open a side panel, rotate the two 1/4-turn fasteners at the upper edges of the side panel. Release the side panel strap at the lower edge of the panel. To remove an open side panel, pull the panel outward to release the tabs at the lower edge of the panel.

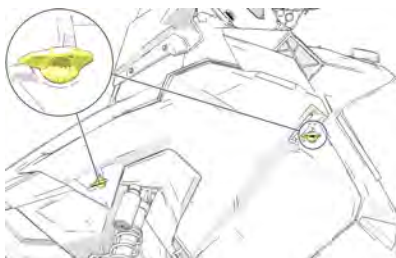

HOOD

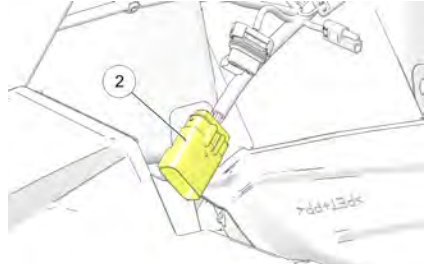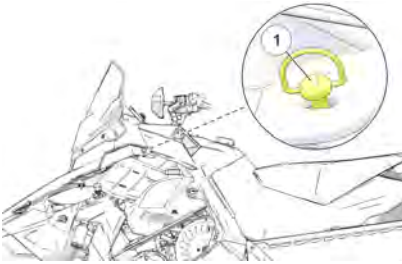

To remove the hood, do the following:


1. Remove the left and right side panels.
2. Rotate the 1/4 turn fasteners ① at the rear corners of the hood.
3. Disconnect the hood wire harness connector ③.
4. Remove the hood assembly from the vehicle.

NOTE

Store the hood in a position that will not damage the brake cooler duct.

INTAKE FILTERS

The intake foam filters ① limit snow ingestion into the intake system. When operating in loose powder snow, check the foam filters periodically to remove any accumulation of snow.

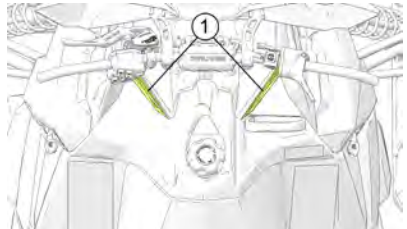

FUEL PUMP

All fuel pump service must be performed by an authorized POLARIS dealer. Do not attempt to service the fuel pump.

MAINTENANCE

FUEL FILTER/FUEL LINES

This snowmobile is not equipped with an in-line fuel filter. The fuel pump uses a sock-type pickup filter located within the fuel tank. This filter should only require maintenance if debris or foreign material enters the fuel tank. Your POLARIS dealer can provide service.

Contaminated or poor quality fuel may shorten the life of fuel system components and result in poor engine performance. Always store fuel in clean fuel containers. If low fuel pressure or reduced engine performance occurs, the filter may need replacement. Your dealer can assist.

Inspect the fuel lines regularly for signs of deterioration or damage. Always check fuel line condition after periods of storage. Normal deterioration from weather and fuel compounds may occur. Replace worn or damaged fuel lines promptly.

NOTICE

Kinking the fuel lines or using a pliers or similar tools to remove fuel lines may cause damage to the lines. If a fuel line has been damaged or kinked, replace it promptly.

SPARK PLUGS

SPARK PLUG RECOMMENDATIONS

A new engine can cause temporary spark plug fouling due to the preservative added during the assembly process. Avoid prolonged idle speeds, which cause plug fouling and carbonization.

Change the spark plugs at the intervals outlined on page 99.

- Use recommended spark plugs with the proper gap. Refer to the specifications section for the specific spark plug to be used in your snowmobile.
- Use only resistor-type spark plugs.
- Torque spark plugs to 18-22 ft. lbs. (24-30 Nm).
- Always carry spare spark plugs.

NOTICE

Using non-recommended spark plugs can result in serious engine damage. A spark plug with a heat range too high will always cause engine damage if the engine is operated in conditions more severe than intended for that plug. Always use the spark plugs recommended for your snowmobile.

SPARK PLUG INSPECTION

Spark plug condition is indicative of engine operation. The spark plug firing end condition should be read after the engine has been warmed up and the vehicle has been driven at higher speeds. Immediately check the spark plug for correct color.

WARNING

A hot exhaust system and engine can cause burns. Wear protective gloves when removing a spark plug for inspection.

1. Remove the left side panel and hood.
2. Remove the spark plug cap.
3. Using the spark plug wrench provided in the tool kit, rotate the spark plug counter-clockwise to remove it.
4. Reverse the procedure for spark plug installation. Torque to specification.
5. Reinstall the spark plug cap. Verify an “audible” click is heard when installing the plug cap.

MAINTENANCE

SPARK PLUG CONDITION

NORMAL PLUG

The normal insulator tip is gray, tan or light brown. There will be few combustion deposits. The electrodes are not burned or eroded. This indicates the proper type and heat range for the engine and the service.

WET FOULED PLUG

The wet fouled insulator tip is black. A damp oil film covers the firing end. There may be a carbon layer over the entire nose. Generally, the electrodes are not worn. General causes of fouling are excessive oil or use of non-recommended injection oil.

COOLING SYSTEM

COOLANT

POLARIS recommends the use of POLARIS Antifreeze 50/50 Premix. This antifreeze is already premixed and ready to use. Do not dilute with water.

To ensure that the coolant maintains its ability to protect the engine, we recommend that the system be completely drained every five (5) years and fresh Antifreeze 50/50 Premix.

Any time the cooling system has been drained for maintenance or repair, replace the coolant with fresh Antifreeze 50/50 Premix.

COOLANT LEVEL

The engine coolant level is controlled by the recovery system. The recovery system components are:

- Coolant bottle/overflow tank
- Pressure cap
- Connecting hoses

Always maintain the coolant level at or slightly above the FULL COLD mark on the coolant bottle (when the engine is cold).

1. Stop the engine.
2. Open the right side panel.
3. View the coolant level in the coolant bottle. Add coolant as needed.

NOTICE

Operating the snowmobile with insufficient coolant will result in overheating and serious engine damage. Always maintain the coolant level as recommended.

FLUSHING THE COOLING SYSTEM

To ensure that the coolant maintains its ability to protect the engine, we recommend that the system be completely drained every five (5) years and fresh Antifreeze 50/50 Premix added. This service must be performed when the engine is cold. Your POLARIS dealer can check the coolant when performing the fall tune-up on your snowmobile.

BLEEDING THE COOLING SYSTEM

WARNING

Steam and hot liquids will cause burns to your skin. Never bleed the cooling system or remove the pressure cap when the engine is warm or hot.

Use of a non-standard pressure cap will not allow the recovery system to function properly. If the pressure cap needs replacement, contact your dealer for the correct part.

NOTICE

Severe engine damage may occur if the cooling system becomes restricted or plugged or contains trapped air pockets.

Perform this procedure in a well-ventilated area. Use the recommended coolant. See page 110.

1. Open the side panels and remove the hood.
2. Close the side panels.


WARNING

Never operate a snowmobile with the side panels open or removed.

3. Position the snowmobile with the right ski and control arms elevated at a 45-degree angle.
4. Fill the coolant bottle to the COLD FILL mark.

MAINTENANCE

5. Using an 8 mm wrench, loosen the air bleed screw ① located on the top of the coolant outlet elbow. Use a shop towel to catch any coolant that leaks from the bleeder. Tighten the screw after a steady stream of coolant flows from the bleeder.

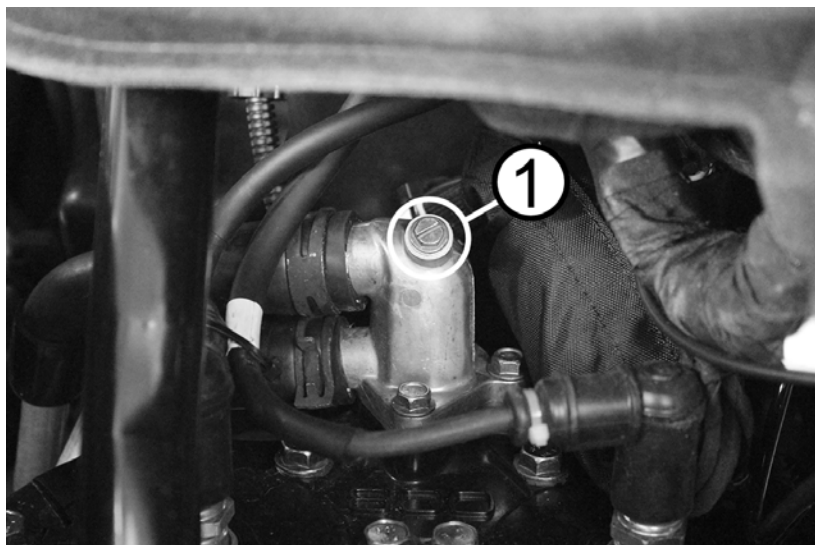

6. Fill the coolant bottle to the COLD FILL mark.
7. Install the coolant bottle cap to the first lock. Do not tighten to the fully seated position.
8. Lock the parking brake.
9. Start the engine and allow it to run at a fast idle for several minutes, until the heaters are warm to the touch. Loosen the bleed screw occasionally to purge any trapped air.
10. When all heater extrusions are warm to the touch, stop the engine.
11. Allow the engine and cooling system to cool. Secure the bleed screw.
12. Fill the coolant bottle to the COLD FILL mark. Reinstall the bottle cap securely.
13. Carefully lower the front end of the snowmobile.
14. Open the side panels and reinstall the hood. Close the side panels.

EXHAUST SYSTEM

Check the exhaust system for wear or damage at approximately 2000 miles (3200 km). Always allow the engine and exhaust system to cool completely before inspecting.

WARNING


Hot exhaust system parts can cause burns. Allow adequate time for the exhaust system to cool. Never perform this procedure with the engine running.

1. Open the side panels and remove the hood.
2. Inspect the muffler and pipes for cracks or damage.
3. Check for weak or missing retaining springs or damper/support grommets.
4. Check for loose clamps on the pipe covers.
5. Reinstall the hood and side panels.

DRIVE CHAIN TENSION

Check drive chain tension weekly and before each long trip.

1. Remove the side panels.
2. Rotate the driven clutch counter-clockwise to move all chain slack to the tensioner side. Lock the brake lever lock, or have an assistant hold the brake lever firmly.
3. Loosen the adjuster bolt jam nut ①.

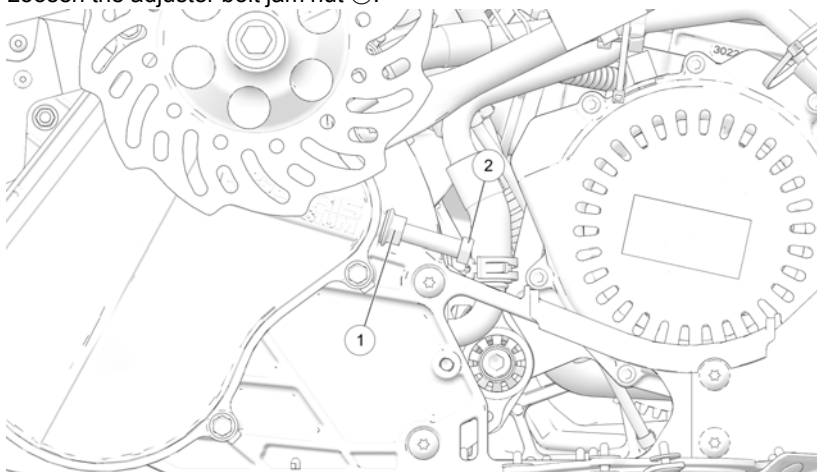

MAINTENANCE

4. Finger tighten the adjuster bolt ② until it can no longer be adjusted by hand, then back off 1/4 turn.
5. Tighten the jam nut while holding the adjuster bolt.

TORQUE

21 ft. lbs. (28 Nm)

6. Reinstall the side panels.
7. Release the brake lever lock.

BRAKES

HYDRAULIC BRAKE INSPECTION

Inspect the brake lever reserve before each use of the snowmobile. See page 83.

Brake pads must be replaced when the brake pad material becomes thinner than the backing plate (approximately 1/16 inch or 1.5 mm). A kit is available for replacing brake pads. Your POLARIS dealer can assist.

⚠ WARNING

Brake failure during operation can result in serious injury or death. Properly functioning brakes are vital to your safety. Be sure the brake pads do not drag on the disc and that brake lever travel is not excessive. Always replace brake pads when the brake pad material becomes thinner than the backing plate (approximately 1/16 inch or 1.5 mm).

BRAKE COMPONENTS

- ① Brake Caliper
- ② Brake Disc
- ③ Brake Pad Material - Replace when thickness is less than 1/16 inch (1.5 mm).



EXCESSIVE LEVER TRAVEL

Hydraulic brakes are self-adjusting, but if excessive brake pad clearance develops, bring the snowmobile to an authorized POLARIS dealer for inspection and adjustment.

TIP

The lightweight brake discs have vent holes that may cause a high-pitched sound during operation.

BRAKE FLUID

The brake fluid level can be seen through a plastic sight glass in the brake reservoir. If the fluid is sufficient, the sight glass will be black. If the sight glass is any color other than black, add brake fluid.

Replace brake fluid at least every two years with POLARIS DOT 4 high temperature brake fluid, or an equivalent product.

WARNING

After opening a bottle of brake fluid, always discard any unused portion. Never store or use a partial bottle. Brake fluid is hygroscopic, meaning it rapidly absorbs moisture from the air. The moisture causes the boiling temperature of the brake fluid to drop, which can lead to early brake fade and the possibility of accident or serious injury.

WARNING

Keep the master cylinder cover free of dirt and debris. The vent slits allow for diaphragm movement, and if they become plugged, movement of brake fluid below the diaphragm may be restricted, altering brake function.

NOTICE

Brake fluid will damage labels, paint and some plastics. Always wipe up spills immediately.

MAINTENANCE

BLEEDING THE HYDRAULIC BRAKE SYSTEM

Air in the hydraulic brake system will cause spongy brake lever action. Bleed the system before operating the snowmobile.

WARNING

Operating the vehicle with a spongy brake lever can result in loss of brakes, which could cause an accident and lead to serious injury or death. Never operate the vehicle with a spongy-feeling brake lever.

During the bleeding procedure, keep the brake handle as level as possible. The reservoir must be in this position to minimize the possibility of air entering the system through the reservoir vent.

1. Remove the brake master cylinder reservoir cover and gasket.
2. Fill the master cylinder reservoir to between the MIN and MAX marks or 1/4-5/16 inch (.6-.8 cm) below the lip of the reservoir opening. Reinstall the gasket and cover.
3. Slip a rubber tube over the ball of the bleeder valve and direct the flow of fluid into an approved container.
4. Squeeze the brake lever a full stroke. Then unscrew the bleeder valve 3/4 of a turn to release air.
5. Close the bleeder valve and release the brake lever.
6. Repeat steps 4–5 until fluid flows from the bleeder valve in a solid stream free of air bubbles.

WARNING

Overfilling the master cylinder leaves no room for fluid expansion and may cause the brakes to lock, resulting in serious injury or death. Always add brake fluid to the fill line as recommended.

7. After bleeding is complete, refill the reservoir to the proper level. See page 115.
8. Reinstall the gasket and cover.

LIGHTS

The headlight and taillight assemblies feature LED elements and are not serviceable. If an LED fails to illuminate in either the headlight or taillight, the entire assembly must be replaced.

FUSE REPLACEMENT

If the engine stops or will not start, or if an electrical component fails to operate, a fuse may need replacement. Locate and correct any damage or short circuits that may have caused the blown fuse, then replace the fuse.

NOTICE

Always replace a blown fuse with a new fuse having the same amperage rating of the blown fuse. Never replace a fuse with a fuse of a higher amperage rating.

CONSTANT POWER FUSE

Models equipped with electric start or an IDD have a battery/electric start wire harness. The 2 amp constant power fuse is located in the hood harness. This fuse protects KEY ON power at the ignition switch. KEY ON power supplies battery voltage to the IDD and GPS puck.

If the IDD does not turn on when the key is in the ON position, check for a blown fuse. If the fuse is blown, inspect the constant power circuit. Repair or replace any damaged components before replacing the fuse.

CLUTCH SYSTEM

Periodically inspect clutch sheaves for damage, wear or belt residue. To maintain optimum performance, clean with non-oil based cleaners such as isopropyl alcohol.

WARNING

If you become aware of higher than normal clutch engagement or an unusual vibration or shift pattern, see your dealer or qualified person immediately. Do not operate the snowmobile until repairs have been made.

All clutch maintenance and repairs can be performed by an authorized POLARIS dealer. Any unauthorized modifications to clutches, such as adding or removing weights, will void the warranty.

NOTICE

The bushings in the weights and rollers of POLARIS clutches are made of a material that may be damaged if lubricated. Do not lubricate clutch bushings.

MAINTENANCE

CLUTCH ALIGNMENT OFFSET

Clutch alignment offset is important for maintaining optimum performance. Your dealer can perform service and adjustments. A special tool is required to check for proper alignment.

DRIVE BELT CONDITION

Periodically check the condition and tension of the drive belt. Inspect the belt for signs of excessive wear (frayed edges, missing cogs, cracks) and excessive looseness. Replace the belt if any of these conditions exist. See page 153.


Always carry a spare drive belt. When placing the belt in the holder, orientate the belt to match the profile of the hood.

For improved drive-away during extremely cold temperatures, remove the belt and warm it to room temperature. Reinstall it before starting the snowmobile.

DRIVE BELT DEFLECTION

Measure belt deflection with both clutches at rest and in their full neutral position.

Place a straight edge on the belt and apply downward pressure while measuring at point. This measurement should be 1 1/4 inches (3.2 cm).

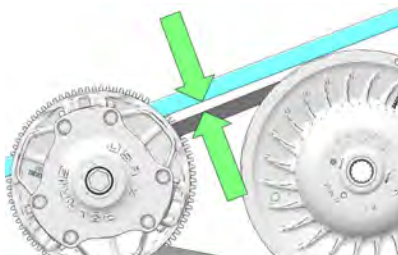

DRIVE BELT ADJUSTMENT

1. Loosen the 7/16-inch jam nut on the belt width adjuster.
2. Using a 1/8-inch Allen wrench, turn the set screw inward (clockwise) to increase the distance between the sheaves or outward (counter-clockwise) to decrease the distance.
3. Tighten the jam nut.

DRIVE BELT REMOVAL

NOTICE

Do not attempt to remove the drive belt after operating in reverse. The snowmobile must be stopped after forward motion to prevent damage to components during belt removal. Rotate the driven clutch counter-clockwise 1/4 turn by hand to ensure forward engagement before attempting to remove the belt.

1. Stop the engine after operating in a forward motion.
2. Turn the ignition key off. Wait for the engine to come to a complete stop.
3. Lock the parking brake.
4. Remove the left side panel.
5. Rotate the driven clutch counter-clockwise 1/4 turn by hand to ensure forward engagement.
6. Locate the L-wrench in the tool kit. Install the wrench into the open threaded hole in the outer sheave of the clutch.
7. Turn the wrench clockwise until the sheaves open far enough to remove the belt. If the wrench does not turn readily, rotate the driven clutch counter-clockwise an additional 1/4 turn by hand and try again.
8. Remove the belt from the driven clutch.

DRIVE BELT INSTALLATION

1. With the L-wrench inserted into the threaded hole and the sheaves in the open position, install the drive belt.

TIP

Install the belt so that the numbers can be read correctly on the left side of the vehicle, or in the direction in which the belt was originally installed.

2. Wiggle the belt to remove slack while removing the L-wrench.
3. Reinstall the side panel.
4. Break in the new belt. See page 89.

MAINTENANCE

TRACK MAINTENANCE

WARNING

Moving parts can cut and crush body parts. When performing the checks and adjustments recommended on the following pages, stay clear of all moving parts. Never perform track measurement or adjustments with the engine running.

TRACK INSPECTION


WARNING

Broken track rods can cause a rotating track to come off the snowmobile, which could cause serious injury or death. Never operate with a damaged track. Never rotate a damaged track under power.

NOTE

The figures below are for reference only. Your model may differ slightly.

1. Using a hoist, safely lift and support the rear of the snowmobile off the ground.
2. Rotate the track by hand to check for damage.
3. Carefully examine the track along the entire length of each rod ①. Bend the track to check for breakage.
4. Replace the track if any rod damage is found.

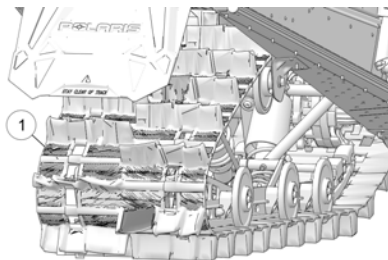

TRACK LUBRICATION

The slide rail needs snow for lubrication. Excessive wear indicates insufficient lubrication. A new rail slide can cause faster heat build-up in limited lubrication, resulting in excessive wear.

WARNING

Operating with insufficient lubrication between the rail slide and track guide clips can cause track failure, loss of vehicle control and loss of braking ability, which can result in serious injury or death. Avoid operating for extended periods on ice and other surfaces that have little or no snow for lubrication.

If excessive rail slide wear occurs due to poor snow conditions, additional wheel kits are available. Your dealer can provide more information.

Track damage or failure caused by operation on ice or under other poor lubrication conditions will void the track warranty.

TRACK TENSION

Track adjustment is critical for proper handling. Always maintain correct tension and alignment.

TRACK TENSION DATA CHART

SUSPENSION	SLACK MEASUREMENT	WEIGHT	MEASUREMENT LOCATION
INDY SP	7/8-1 1/8 inch (2.2-2.6 cm)	10 lbs. (4.54 kg)	16 inches (40 cm) ahead of rear idler shaft
INDY XC	7/8-1 1/8 inch (2.2-2.6 cm)	10 lbs. (4.54 kg)	16 inches (40 cm) ahead of rear idler shaft

TIP

Tension adjustments should be made only after the track is warmed up and limber.

1. Turn the engine off.
2. Lift the rear of the snowmobile and safely support it off the ground.
3. Place the recommended weight or downward pressure on the track at the specified distance (see chart) ahead of the center of the rear idler wheel.
4. Measure at the point where the weight is hanging.

MAINTENANCE

5. Check for specified slack between the wear surface of the track clip and the plastic slider. Refer to the Track Tension Data Chart above.

If the track needs adjustment:

6. Loosen the rear idler shaft bolt.
7. Loosen the locknuts.
8. Tighten or loosen the track adjusting screws to provide equal adjustment on both sides of the track.
9. Repeat the measurement on the other side of the track.

TIP

Check more frequently when the snowmobile is new.


10. Start the engine and slowly rotate the track at least five revolutions. Let the track come to a stop (do not apply brakes).
11. Check track alignment (see page 122) and adjust as necessary.
12. Tighten the locknuts.
13. Tighten the idler shaft bolt.

TORQUE

35 ft. lbs. (47.5 Nm)

TRACK ALIGNMENT

Periodically check that the track is centered and running evenly on the slide rails ①. Misalignment will cause excessive wear to the track and slide rail.

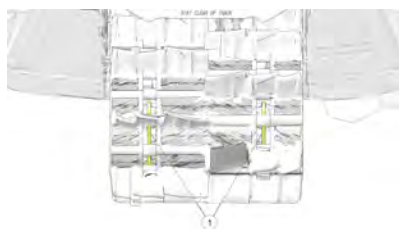

1. Safely support the rear of the snowmobile with the track off the ground.
2. Start the engine and apply a small amount of throttle until the track turns slowly at least five complete revolutions. Stop the engine and let the track come to a stop (do not apply brakes).

3. Inspect track alignment by looking through the track window to make sure the rails are evenly spaced on each side. If the track runs to the left, loosen the idler shaft bolt, then loosen the left locknut and tighten the left adjusting bolt. If the track runs to the right, loosen the idler shaft bolt, then loosen the right locknut and tighten the right adjusting bolt.
4. After adjustments are complete, tighten the locknuts and torque the idler shaft bolt 55 ft. lbs. (75 Nm).
5. Repeat steps 2–3 to verify proper alignment.

STEERING SYSTEM

The steering systems on POLARIS snowmobiles can be adjusted with ski toe alignment. Improper toe alignment can cause erratic steering. Your dealer can assist with adjustments.

WARNING

Improper alignment or adjustment may cause loss of steering control, resulting in serious injury or death. Do not attempt to change the ski alignment. Your POLARIS dealer can assist.


MAINTENANCE

FRONT SUSPENSION INSPECTION

WARNING

Improper fastener torque or front suspension component damage may cause loss of steering control, resulting in serious injury or death. Your POLARIS dealer can assist.

Each week, or before a long ride, check the following items. If component damage or loose fasteners are found, your POLARIS dealer can provide service.

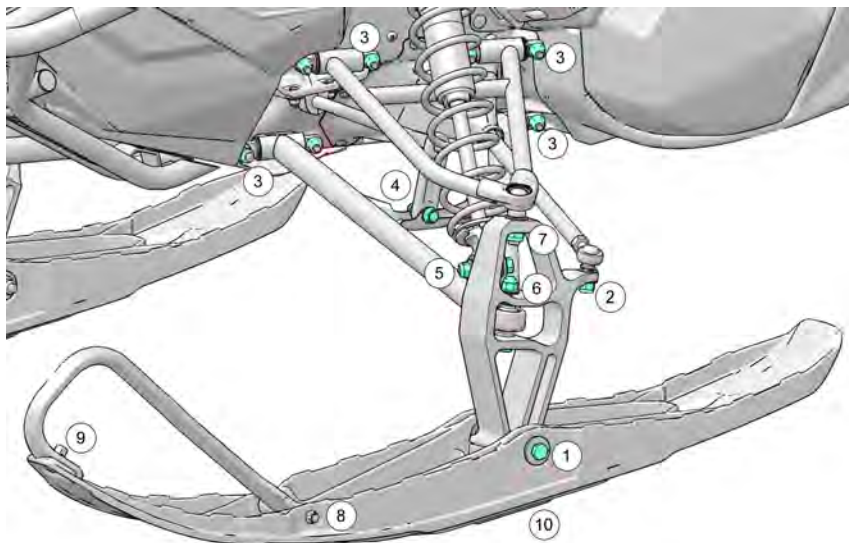


- | | |
|--------------------------------------|----------------------------------|
| ① Ski Bolt Nuts | ⑥ Lower Control Arm Spindle Nuts |
| ② Tie Rod End Nuts | ⑦ Upper Control Arm Spindle Nuts |
| ③ Upper/Lower Control Arm Nuts (All) | ⑧ Ski Loop Rear Fasteners |
| ④ Sway Bar Fasteners | ⑨ Ski Loop Front Fasteners |
| ⑤ Shock Mounting Fasteners | ⑩ Ski Skag Fasteners |

SKI ALIGNMENT

WARNING

Improper ski alignment or adjustment may cause loss of steering control, resulting in serious injury or death. Do not attempt to change the ski alignment or camber adjustment. Your POLARIS dealer can assist.

1. Place the handlebars in a straight-ahead position.
2. With only vehicle weight compressing the suspension, measure 10 inches (25.4 cm) forward from the center of the ski mounting bolt (see in illustration below). At this point, measure between the skis. This is measurement ①.
3. Perform the same measurement rearward from the center of the ski mounting bolt. This is measurement ②.
4. The ① measurement should be 1/8 inch (3 mm) greater than the ② measurement. If the skis are misaligned, your dealer can assist with alignment correction as camber adjustment may also be affected.

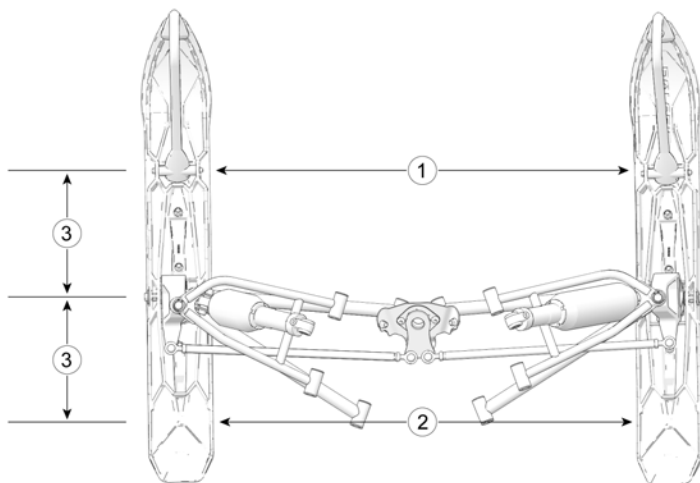

SKI SKAGS

WARNING

Worn skis and/or skags will adversely affect handling. Loss of vehicle control may result, causing serious injury or death. Your dealer's studding chart can provide the recommended skags. If you install longer or more aggressive carbide skags than the original equipment, it may also be necessary to add track studs to maintain proper vehicle control while turning on hard-packed snow or ice.


Check skags before each use of the snowmobile to ensure positive steering characteristics. Skags must be replaced when worn to half their original diameter.

TIP

Carbide skags must be replaced if any abnormal wear or chipping is found.


SKAG REPLACEMENT

1. Raise and support the front of the snowmobile so the skis are approximately 6 inches (15.2 cm) from the ground.
2. Remove the attaching nuts and pry the skag ① downward.
3. Remove the front end of the skag.
4. Remove the rear end of the skag.
5. Reverse the steps to install a skag.

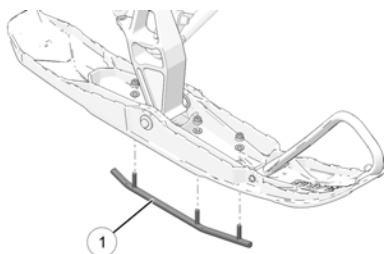


RAIL SLIDE WEAR

Polaris rail slides run along the bottom of the rail to prevent track wear. The rail slide should be inspected periodically and replaced when necessary.

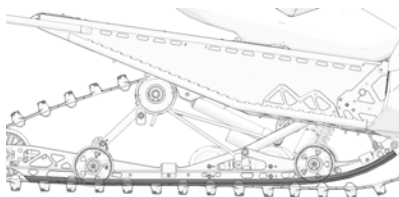

For ease of inspection, all POLARIS rail slides have a wear limit indicator groove ② to indicate the minimum permissible slide thickness ①. Replace the rail slides if they are worn to the top of the groove at any point along their length. Failure to do so may result in permanent damage to the track or rails.




BATTERY (IF EQUIPPED)

BATTERY REMOVAL



WARNING

Improperly connecting or disconnecting battery cables can result in an explosion and cause serious injury or death. When removing the battery, always disconnect the negative (black) cable first. When reinstalling the battery, always connect the negative (black) cable last.

1. Remove the right side panel to access the battery.
2. Remove the two plastic rivets ① securing the console panel to the chassis.

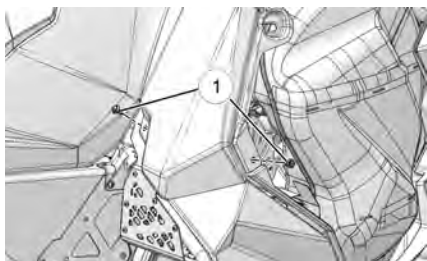


3. Remove the plastic rivet ② securing the fender to the chassis.
4. Disconnect the black (negative) battery cable first.
5. Disconnect the red (positive) battery cable last.
6. Remove the battery hold-down strap ③.

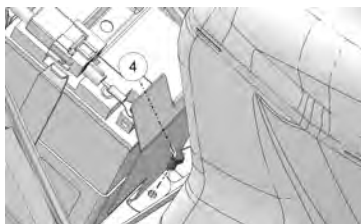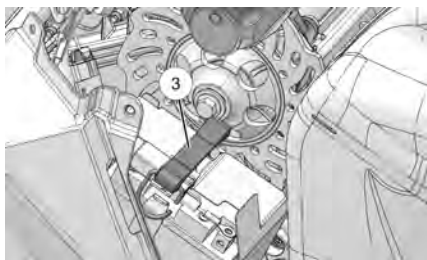

7. Remove the screw ④ securing the battery shield to the battery bracket.

8. Remove the battery shield ⑤.

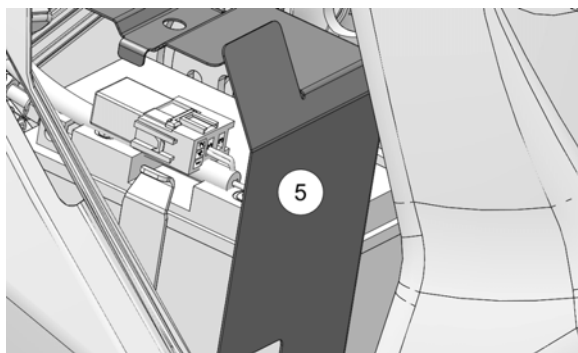

9. Remove the battery from the battery bracket.

BATTERY INSTALLATION

When installing a new battery, make sure it's fully charged prior to its initial use. Using a new battery that has not been fully charged can damage the battery and result in a shorter life. It can also hinder vehicle performance. Follow the battery charging instructions before installing the battery. See page 131.

1. Ensure that the battery is fully charged.
2. Set the battery in the battery holder.
3. Place the battery shield on the battery bracket. Install the screw to secure the shield.

TORQUE

7 ft-lbs (10 Nm)


4. Install the battery hold-down strap.
5. Connect and tighten the red (positive) cable first.

MAINTENANCE

6. Connect and tighten the black (negative) cable last.

CAUTION

Verify the battery cables and wiring harness do not come into contact with the brake disc. Move the wiring harness/cables behind the chassis tube and away from the brake disc.

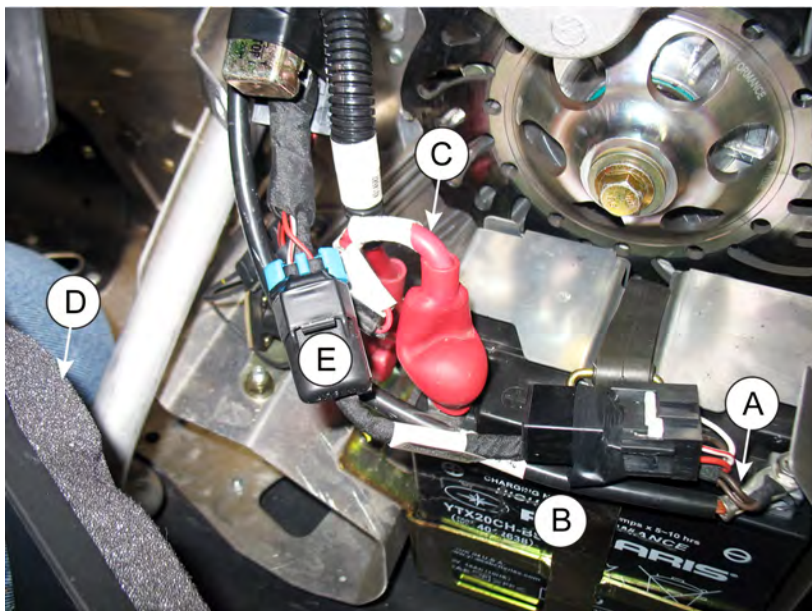

IMPORTANT

Route the BROWN harness ground wires (A) and BLACK main battery ground cable (E) as shown in the image. Both are routed up and over the rubber strap.

If the ground wires/cable are routed down the side of the battery, they may interfere with the rear side panel tab. Note the routing of the RED (positive) battery cable (C) and that the right fender (D) is pulled away from the chassis.

Item (E) is the constant power fuse connector.

7. Verify that cables are properly routed.

NOTICE

Ensure that the battery wires are routed in such a way that they cannot come into contact with the brake disc.

8. Secure the right fender using the plastic rivet.
9. Reinstall the console using the two plastic rivets.
10. Reinstall the side panel.

BATTERY STORAGE

Whenever the vehicle is not used for a period of three months or more, remove the battery from the vehicle, ensure that it's fully charged, and store it out of the sun in a cool, dry place. Check battery voltage each month during storage and recharge as needed to maintain a full charge.

TIP

Battery charge can be maintained by using a POLARIS Battery Tender™ charger or by charging about once a month to make up for normal self-discharge. Battery Tender™ can be left connected during the storage period, and will automatically charge the battery if the voltage drops below a pre-determined point.

BATTERY CHARGING

The following battery charging instructions apply only to the installation of a sealed battery. Read all instructions before proceeding with the installation of this battery.

The sealed battery is already filled with electrolyte and has been sealed and *fully charged* at the factory. *Do not ever pry the sealing strip off* or add any other fluid to this battery.

The single most important thing about maintaining a sealed battery is to keep it fully charged. Since the battery is sealed and the sealing strip cannot be removed, you must use a voltmeter or multimeter to measure DC voltage.

For a refresh charge, follow all instructions carefully.

1. Check the battery voltage with a voltmeter or multimeter. A fully charged battery will register 12.8 V or higher.
2. If the voltage is less than 12.8 volts, recharge the battery at 1.2 amps or less until the battery voltage is 12.8 or greater.

RESTRICTION

When using an automatic charger, refer to the charger manufacturer's instructions for recharging. When using a constant current charger, use the following guidelines for recharging.

MAINTENANCE

WARNING

An overheated battery may explode, causing severe injury or death. Always watch charging times carefully. Stop charging if the battery becomes very warm to the touch. Allow it to cool before resuming charging.

TIP

Always verify battery condition before and 1-2 hours after the end of charging.

State of Charge	Voltage	Action	Charge Time (Using constant current charger @ standard amps specified on top of battery)
100%	12.8-13.0 volts	None, check at 3 mos. from date of manufacture	None required
75%-100%	12.5-12.8 volts	May need slight charge, if no charge given, check in 3 months	3-6 hours
50%-75%	12.0-12.5 volts	Needs charge	5-11 hours
25%-50%	11.5-12.0 volts	Needs charge	At least 13 hours, verify state of charge
0%-25%	11.5 volts or less	Needs charge with desulfating charger	At least 20 hours

FALL TUNE-UP

For maximum performance, your POLARIS dealer can perform a fall service tune-up. Their experienced and trained service technicians will keep your snowmobile in peak operating condition.

TRANSPORTING THE SNOWMOBILE

Whenever the snowmobile is transported:

1. Be sure the fuel cap and oil cap are installed correctly.
2. Tie the snowmobile to the transporting unit securely using suitable straps.
3. Remove the ignition key to prevent loss.

NOTE

Use of a cover is recommended when transporting your vehicle on an open trailer or sled deck.

SUMMER STORAGE GUIDE

TREATING THE FUEL SYSTEM

As the riding season draws to a close, Polaris recommends riders begin treating their snowmobile's fuel system with Polaris Carbon Clean or similar commercially-available fuel stabilizer.

Treating the fuel system with Carbon Clean during the last few rides of the season ensures the entire fuel system is treated. Then, when it comes time to store the snowmobile, all the rider has to do is completely fill the fuel tank with fresh, non-oxygenated fuel and treat the new fuel with Carbon Clean.

It is also recommended riders use non-oxygenated fuel during the last rides of the season as non-oxygenated fuel stores better than oxygenated fuel and resists water vapor absorption.

If the rider was unable to treat the fuel system and/or use non-oxygenated fuel at the end of the riding season, the rider should do the following:

1. The rider should consume as much fuel in the fuel tank as possible during the last rides of the season.
2. When performing the summerization storage procedures, fill the fuel tank completely with non-oxygenated fuel. Note that most oxygenated fuels contain ethanol. Since ethanol is hydroscopic, oxygenated fuel will absorb a small amount of water vapor during the storage season and more so in humid locations. Completely filling the tank with non-oxygenated fuel minimizes water vapor absorption during the storage period and limits the amount of air and water vapor that can accumulate in the tank.
3. Treat the fuel in the fuel tank with the recommend amount of Polaris Carbon Clean. The recommended mixing ratio is outlined on the bottle label.
4. Position the snowmobile outside in a well-ventilated area.
5. Start and run the engine for 10-15 minutes to distribute the treated fuel throughout the fuel system.

NOTE

On Carbureted engines (550cc / 120 Youth), run the engine for 10-15 minutes and then turn the fuel shut off valve to 'OFF'. Continue to run the engine until the engine stalls and turns off. Doing this drains the carburetors of fuel.

MAINTENANCE

FOGGING THE ENGINE

Fogging the engine with Polaris fogging oil or similar commercial alternative is probably the most important storage step a rider can do to ensure the internal parts of their snowmobile's engine do not rust and corrode during the storage season.

To fog the engine, do the following:

1. Remove the spark plugs from the engine.
2. Liberally spray fogging oil into each spark plug hole. If possible, have an assistant slowly pull on the recoil rope to rotate the engine while spraying the oil into each cylinder.
3. Loosely install the spark plugs.

NOTE

Do not install new spark plugs after fogging the cylinders. Fogging oil prevents the formation of rust / corrosion by sticking to the internal engine components – including the spark plug electrodes. Replace these spark plugs the following season after all of the fogging oil has been burned out of the engine.

DRIVE BELT STORAGE

Never leave the drive belt installed in the clutches as oxidation may form where the belt contacts the aluminum clutch sheave faces.

To clean the drive and driven clutches, do the following:

1. Remove the primary and secondary drive belt from the snowmobile.
2. Inspect the drive belt for wear and glazing. Compare the primary belt with the back-up (secondary) belt. Decide if a new belt is needed next season and note the primary belt can now be used as the back-up belt next season.
3. Clean the driven and driven clutch sheaves with Isopropyl Alcohol. Allow the alcohol to air dry. Continue cleaning the sheave faces until all belt residue is removed.

BATTERY/ELECTRICAL SYSTEM STORAGE

Never leave a battery unattended during the storage season. Snowmobile batteries are small and cannot maintain their charge over the storage season. To ensure your battery maintains its level of charge, the battery should be connected to a battery tender / trickle charger.

1. While the battery can remain installed on the snowmobile, it is recommended the battery be removed from the snowmobile and stored in a cool, and dry location. Removing the battery from the snowmobile facilitates off-site storage of the snowmobile where electricity may not be available to connect a battery tender. In addition, removing the battery allows access to other maintenance items, such as the chaincase chain tensioner bolt.
2. Connect a Polaris battery tender or equivalent commercially available tender to the battery.
3. Inspect the electrical connections and wire harnesses throughout the snowmobile. If damage is found, make a note of the damage so that you and your authorized Polaris dealer can address the concern.

CHAINCASE

Never leave 'used' lubricant in the chaincase during the storage season. Doing so may leave water present in the chaincase which may cause corrosion and rust.

1. Follow the Owner's Manual procedures and drain / fill the chaincase with new Polaris SCL (Synthetic Chaincase Lubricant). All Polaris PRO-RIDE and AXYS snowmobile feature 'fill-to-spill' lubricant fill specifications which makes it relatively 'easy' to re-fill the chaincase.
2. Rotate the driven clutch in the direction of forward vehicle travel to move the chain slack to the tensioner-side of the drive system. Lock the parking brake.
3. Loosen the drive chain adjuster lock nut. Turn the adjuster screw inwards until it can no longer be turned by hand.
4. At this point, turn the adjuster nut $\frac{1}{4}$ turn counter clockwise.
5. Tighten and then torque the jam nut to the specification listed in the Owner's Manual. Release the parking brake.

NOTE

If the snowmobile is equipped with a transmission (Titan / WideTrak snowmobiles), there is not a drive chain adjustment procedure.

MAINTENANCE

CLEANING THE SNOWMOBILE

Snowmobiles, especially those transported on sled decks and open trailers can accumulate a lot of water and road dirt / salt during the riding season. The snowmobile must be thoroughly washed and cleaned to prevent corrosion and rust formation.

1. Wash the snowmobile with a garden hose and a solution of soapy water. Note that if a pressure washer is used, care should be taken to not point the pressure washer nozzle close to the snowmobile which may force high pressure water into suspension / shock shaft seals and exposed electrical connectors.
2. Dry the snowmobile with a lint-free towel. Allow the entire snowmobile to air dry afterwards.
3. Clean the engine compartment. Use a shop vacuum if required to remove dirt, leaves, cat tails, etc. from within the engine compartment.
4. Hand wash the exhaust system and dry the pipe and silencer with a clean shop towel.
5. Apply "spray" metal protectant on exposed metal components, such as the exhaust pipe, silencer, shock shafts, and suspension springs/pivots.

IMPORTANT

Do not spray metal protectant on the drive or driven clutches.

LUBRICATE THE PIVOTS

After washing the snowmobile, it is important to use Polaris Premium All Season grease to lubricate the various suspension / steering pivot points. Doing so forces any water accumulated within the joints out which prevents the formation of corrosion and rust.

1. Use a grease gun and Polaris Premium All Season Grease. Reference the appropriate Owner's Manual to locate any / all grease zerks on the steering and suspension systems.
2. Pump fresh grease into all zerks until the grease can be seen purging out of each joint.
3. Use a paper towel to clean up and remove all of the residual purged grease from the joints.

STORING THE SNOWMOBILE

Never store the snowmobile in a hot, humid location if possible. Try to store the snowmobile away from direct sunlight.

1. Cover the snowmobile with a Polaris cover or after-market equivalent cover.
2. Store in a location always from water, tall grass, and direct sunlight. The storage location should have some level of ventilation to prevent stagnant, humid air from accumulating in and around the snowmobile.

WINTER RIDE PREPARATION

Preparing a snowmobile for in-season service is basically performing some of the summer storage procedures in reverse order.

1. Move the snowmobile outside to a well-ventilated area. Raise the rear suspension up, off the ground. Remove the engine compartment side panel and hood.
2. Prep the primary and back up (secondary) for winter use. It is recommended the belts be washed with a solution of warm, soapy water and allowed to air dry.
3. If the snowmobile is equipped with electric start or a PIDD on-board battery, remove the battery from the battery tender and re-install it back into the battery box. Follow the owner's manual for battery installation procedures.
4. Verify the spark plugs are installed and torqued. Re-install the spark plug wires.

NOTE
Verify you hear an audible "click" when pushing the spark plug caps down onto the spark plugs. This ensures the plug caps are seated properly.

5. If you placed dryer sheets inside the engine compartment, remove them.
6. Using clean and dry shop towel, wipe down the exhaust pipe, silencer, and clutch sheaves.
7. Install the primary drive belt onto the clutches with the "Polaris" writing readable from the outside of the snowmobile.
8. Install the back-up (secondary) drive belt into the belt holder.
9. On the carbureted snowmobiles, turn the fuel shut-off valve to the ON position.
10. With the track suspended up, off the ground, follow the track tension adjustment procedure as outlined in your owner's manual.

MAINTENANCE

11. Start and run the engine. Allow the engine to run for at least 15 minutes. Occasionally “blip” the throttle to rev the engine.

NOTE
The exhausted may emit more smoke than usual as the fogging oil is burned out of the engine.

12. While the engine is running, verify there are no coolant leaks (on liquid cooled engines). After engaging the throttle a few times to spin the track, verify the track is aligned with the slide rails.
13. Turn off the engine. If the track requires, re-align the track at this time.
14. After adjusting the track or allowing the engine to cool down. Add coolant to reservoir bottle if required.
15. Re-start the engine and allow it to run for another 15 minutes. After 15 Minutes, shutoff the engine and allow the exhaust pipe to cool.
16. Remove and discard the spark plugs. Install new spark plugs into the engine. Obtain two more new spark plugs and install them into the spark plug holders or storage bag.
17. Inspect the ski wear bars/carbides. Now is the time to replace the wear bars if damage is found or carbides are worn.
18. Add Carbon Clean to the fuel tank.
19. Log onto www.ridecommand.com and download the latest TRAILS PIDD update files. Update the PIDD (if equipped) with the latest TRAILS update file.
20. Grease the rear suspension grease zerks with Polaris Premium All Season grease just enough to push out any water that may have accumulated in the suspension pivot points.

SPECIFICATIONS

600 INDY XC 129

CAPACITIES AND DIMENSIONS	
Body Style	AXYS
Rider Capacity	1
Coolant Capacity	4 qts. (3.8 l)
Chaincase Oil Capacity	10 oz. (296 ml)
Fuel Tank Capacity	12 gal. (45.4 l)
Gearcase Oil Capacity	N/A
Oil Capacity (qts./l)	3.9 qts. (3.7 l)
Height	46 inches (116.8 cm)
Length	117 inches (297.2 cm)
Designed Width	47 inches (119 cm)
Brake Type	Hayes Phantom Floating Piston DOT 4
Drive Clutch Center Distance	10.625 inches (27 cm)
Drive Belt P/N	3211165
Drive Clutch	P-85
Driven Clutch	Lightweight Team Roller Reverse
Reverse Transmission	Electronic Reverse

SPECIFICATIONS

ENGINE AND COOLING	
Engine	ASM-ENG S5731-6044-ON6P
Displacement	599 cc
Cylinders	2
Bore x Stroke (mm)	77.25 x 64
Alternator Output	400 watt
Throttle Body	1204920
Recommended Engine Oil	VES
Throttle Body Bore Size	46 mm
Idle RPM	1700 +/- 200
Rated Operating RPM	8250 +/- 250
Cooling	Liquid
Ignition Type	CDI
Ignition Timing °BTDC	18° @ idle, 1700 RPM w/120°F (49° C) water temp
Spark Plug / Gap	NGK BPR9ES / .70 inches (.027 mm)
Recommended Fuel Octane	91 recommended (87 minimum)

SPECIFICATIONS

CLUTCH SETTINGS					
ALTITUDE METERS (FEET)	DRIVE CLUTCH		DRIVEN CLUTCH		
	SHIFT WEIGHT	CLUTCH SPRING (ELECTRIC START)	CLUTCH SPRING	DRIVEN HELIX	GEARING (U : L -PITCH)
* Shaded cells indicate factory settings. Use 2 gram lighter shift weights when operating in temperatures above 40° F (5° C). Drive Clutch Bolt Torque: 80 ft-lbs (108 Nm) Re-torque after running engine.					
0-600 (0-2000)	10-64	140/330 (7043829)	Blk/Purple (7043363)	48/42-.36 (5140312)	22:41-70 1.25" Rip II 1.352" Cobra
600-1200 (2000-4000)	10-62				
1200-1800 (4000-6000)	10-60				
1800-2400 (6000-8000)	10-58				20:39-68 1.5" Storm
2400-3000 (8000-10,000)	10-56				21:42-70 1.25" Rip II 1.352" Cobra
3000-3600 (10,000-12,000)	10A-L				19:40-68 1.5" Storm

SPECIFICATIONS

800 INDY XC 129

CAPACITIES AND DIMENSIONS	
Body Style	AXYS
Rider Capacity	1
Coolant Capacity	4 qts. (3.8 l)
Chaincase Oil Capacity	10oz. (296 ml)
Fuel Tank Capacity	12 gal. (45.4 l)
Gearcase Oil Capacity	N/A
Oil Capacity (qts./l)	3.9 qts. (3.7 l)
Height	46 inches (116.8 cm)
Length	117 inches (297.2 cm)
Designed Width	47 inches (119.4 cm)
Brake Type	Hayes Phantom Floating Piston DOT 4
Drive Clutch Center Distance	10.625 inches (27 cm)
Drive Belt P/N	3211177
Drive Clutch	P-85
Driven Clutch	Lightweight Team Roller Reverse
Reverse Transmission	Electronic Reverse

ENGINE AND COOLING	
Engine	ASM-ENG S5732-8044-ON8P
Displacement	794 cc
Cylinders	2
Bore x Stroke (mm)	85 x 70
Alternator Output	400 watt
Throttle Body	1205241
Recommended Engine Oil	VES
Throttle Body Bore Size	46 mm
Idle RPM	1700 +/- 200
Rated Operating RPM	8250 +/- 250
Cooling	Liquid
Ignition Type	CDI
Ignition Timing °BTDC	18° @ idle, 1700 RPM w/120°F (49° C) water temp
Spark Plug / Gap	BPR 9ES /.027 inches (0.7 mm)
Recommended Fuel Octane	91 recommended (87 minimum)

SPECIFICATIONS

CLUTCH SETTINGS					
ALTITUDE METERS (FEET)	DRIVE CLUTCH		DRIVEN CLUTCH		
	SHIFT WEIGHT	CLUTCH SPRING	CLUTCH SPRING	DRIVEN HELIX	GEARING (U : L -PITCH)
* Shaded cells indicate factory settings. Use 2 gram lighter shift weights when operating in temperatures above 40° F (5° C). Drive Clutch Bolt Torque: 80 ft-lbs (108 Nm) Re-torque after running engine.					
0-600 (0-2000)	10-66	GOLD 100-275 7041148	BLU/BLK 123-203 7043064	58/44/.36 5140311	23:37-68 1.25" Rip II 1.352" Cobra
600-1200 (2000-4000)	10-64				22:41-70 1.5" Storm
1200-1800 (4000-6000)	10-62		BLK 155-22 7043063		21:42-70 1.25" Rip II 1.352" Cobra
1800-2400 (6000-8000)	10-60	19:40-68 1.5" Storm			
2400-3000 (8000-10,000)					140-330 7043829
3000-3600 (10,000-12,000)	10-58				
* = STOCK INTERNATIONAL					

600 INDY® SP

CAPACITIES AND DIMENSIONS	
Body Style	AXYS
Rider Capacity	1
Coolant Capacity	4 qts. (3.8 l)
Chaincase Oil Capacity	10 oz. (296 ml)
Fuel Tank Capacity	12 gal. (45.4 l)
Gearcase Oil Capacity	N/A
Oil Capacity (qts./l)	3.9 qts. (3.7 l)
Height	54.5 inches (138.4 cm)
Length	117 inches (297.2 cm)
Designed Width	47 inches (119 cm)
Brake Type	Hayes Phantom Floating Piston DOT 4
Drive Clutch Center Distance	10.625 inches (27 cm)
Drive Belt P/N	3211165
Drive Clutch	P-85
Driven Clutch	Lightweight Team Roller Reverse
Reverse Transmission	Electronic Reverse

SPECIFICATIONS

ENGINE AND COOLING	
Engine	ASM-ENG S5254-6044-OF6P
Displacement	599 cc
Cylinders	2
Bore x Stroke (mm)	77.25 x 64
Alternator Output	400 watt
Throttle Body	1204920
Recommended Engine Oil	VES
Throttle Body Bore Size	46 mm
Idle RPM	1700 +/- 200
Rated Operating RPM	8250 +0/- 250
Cooling	Liquid
Ignition Type	CDI
Ignition Timing °BTDC	18° @ idle, 1700 RPM w/120°F (49° C) water temp
Spark Plug / Gap	NGK BPR9ES / .70 inches (.027 mm)
Recommended Fuel Octane	91 recommended (87 minimum)

CLUTCH SETTINGS					
ALTITUDE METERS (FEET)	DRIVE CLUTCH		DRIVEN CLUTCH		
	SHIFT WEIGHT	CLUTCH SPRING (ELECTRIC START)	CLUTCH SPRING	DRIVEN HELIX	GEARING
0-600 (0-2000)	10-64	120-310 7043681 (BLK/GRN 7042083)	RED/BLK 7043058	56/42-.36 5135403	22:41-70
600-1200 (2000-4000)	10-62				
1200-1800 (4000-6000)	10-60				
1800-2400 (6000-8000)	10-58				
2400-3000 (8000-10,000)	10-56				20:41-72
3000-3600 (10,000-12,000)	10A-L				
Drive Clutch Bolt Torque: 80 ft-lbs (108Nm) Re-torque after running engine. OPTIONAL-USE 2 GRAM LIGHTER CLUTCH WEIGHTS WHEN OPERATING IN PROLONGED WARM TEMPERATURES (LATE FALL/SPRING SEASON) TO MAINTAIN PEAK OPERATING RPM.					

TROUBLESHOOTING

ENGINE TROUBLESHOOTING

Unless you have experience and training in two-cycle engine repair, your dealer can assist if technical problems arise.

PROBLEM	PROBABLE CAUSE	SOLUTION
Erratic engine operating RPM during acceleration or load variations	Drive clutch binding	Your dealer can perform this service.
	Driven clutch malfunction	Your dealer can perform this service
Harsh drive clutch engagement	Drive belt worn or too narrow	Replace the drive belt.
	Excessive belt/sheave clearance	Your dealer can perform this service.
Drive belt turns over	Wrong belt for application	Replace the drive belt.
	Clutch alignment out of spec	Your dealer can perform this service.
	Engine mount broken or loose	Inspect and replace. Your dealer can perform this service.
Machine fails to move	Clutch jammed	Check for twisted belt or broken spring. Your dealer can perform this service.
	Track jammed	- Foreign object may be caught or the rail slide melted to the track clips due to lack of lubrication. - Track may be iced up or frozen to the ground.
	Chaincase sprocket or chain jammed or broken	Chain is loose or broken or chain tightener is loose. Your dealer can perform this service.

TROUBLESHOOTING

PROBLEM	PROBABLE CAUSE	SOLUTION
Noise in drive system	Broken drive clutch components	Your dealer can perform this service.
	Bearing failure/ chaincase, jackshaft, or front drive shaft	Your dealer can perform this service.
	Drive belt surface flat spots	Inspect and replace as needed.
	Drive chain loose	Inspect and adjust (or replace).
	Drive chain worn, sprocket teeth broken	Your dealer can perform this service.
Poor low RPM performance	Worn drive belt	Inspect and replace as needed.
	Excessive belt/sheave clearance	Your dealer can perform this service.
	Sticky clutch	Your dealer can perform this service.
	Poor fuel quality	Use 87-91 octane fuel (or higher).
Engine doesn't turn	Seized engine	Your dealer can perform this service. Seizure is a result of poor lubrication, inadequate fuel supply, broken parts or improper cooling.
	Hydrostatic lock	Fuel may have entered the crankcase while the vehicle was standing or being transported. Drain plug(s) are located on the lower crankcase for emergency draining. Your dealer can perform this service

PROBLEM	PROBABLE CAUSE	SOLUTION
Engine turns but fails to start	Faulty ignition	Install new spark plug(s). If engine still fails to start, check for spark. If there's no spark, Your dealer can perform this service.
	No fuel to engine	• Make sure the fuel valve is on. • Make sure tank contains fuel. • Ice may be in the fuel line, filter or pump. Add isopropyl alcohol to the fuel system. • Your dealer can perform this service.
	Poor engine compression	This indicates a major engine problem that must be repaired before operating. Your dealer can perform this service.
Engine lacks power	Fouled or defective spark plug(s)	Replace the plug(s).
	Fuel filter (loss of high RPM power)	Your dealer can perform this service.
	Plugged fuel filter or tank pick-up sock	Your dealer can perform this service.
	Incorrect clutching	Your dealer can perform this service.
Engine continually backfires	Faulty plug(s)	Change plug(s), ensure caps are seated.
	Fuel System	Dirt or ice may be in the fuel system (deicer should be added to non-ethanol fuel at all times for assurance against fuel line icing).

TROUBLESHOOTING

PROBLEM	PROBABLE CAUSE	SOLUTION
	Incorrect throttle freeplay or faulty switch	Your dealer can perform this service.
Engine requires more than normal pulls to start	Poor fuel	Replace with fresh winter fuel.
	Not enough fuel getting to engine	Your dealer can perform this service.
	Plugged fuel filter or tank pick-up sock	Your dealer can perform this service.

SUSPENSION TROUBLESHOOTING

PROBLEM	SOLUTION
Rear suspension bottoms too easily	• Refer to page 65. • Revalve rear track shock (see your dealer).
Rides too stiff in rear	• Refer to . • Check for binding suspension shafts and grease all pivot points.
Too much weight transfer when climbing	Refer to page 65.
Too little weight transfer when climbing	Refer to page 65.
Machine darts from side to side	• See your dealer for ski alignment inspection. • Make sure spindles and all steering components turn freely. • Check for excessive play in steering assembly (your dealer can assist). • Ensure skags are straight on skis.

PROBLEM	SOLUTION
Front end pushes	• Refer to Suspension Quick Set-up Guide. • Check for worn skags. • Check for binding front suspension shafts and steering components, grease all pivot points (elevate front of snowmobile). • Increase IFS preload (if equipped).
Steering is heavy	• Refer to Suspension Quick Set-up Guide. • Make sure spindles and all steering components turn freely. • See your dealer for ski alignment inspection. • Check skags and skis for damage.

DRIVE BELT TROUBLESHOOTING

BELT WEAR/BURN DIAGNOSIS	
CAUSES	SOLUTIONS
Driving at low RPM	Drive at higher RPMs. Gear the machine down. Check belt deflection.
Insufficient warm-up	Warm the engine at least five minutes. Put the transmission in neutral to warm belt. In extreme cold weather, take the drive belt off the snowmobile and warm it up. Break snowmobile loose from the snow.
Towing at low RPM	Do not tow in deep snow. Use fast, aggressive throttle to engage clutch.
Riding with high RPM and slow speed (8000 RPM/10 MPH/16 km/h)	Lower the gear ratio. Reduce RPM. Avoid riding in high ambient temperatures. Check for snow ingestion.
Ice and snow build-up between track and tunnel	Warm the engine at least five minutes. Take the drive belt off the snowmobile in extremely cold weather and warm it up. Break snowmobile loose from the snow.
Poor engine performance	Check for fouled plugs and water, ice or dirt in the fuel tank or fuel line.

TROUBLESHOOTING

BELT WEAR/BURN DIAGNOSIS	
CAUSES	SOLUTIONS
Loading snowmobiles onto trailers	Skis may gouge into trailers and prevent the drivetrain from spinning properly. Use enough speed to drive the snowmobile completely onto the trailer. Push and pull it to finish loading if necessary.
Clutch malfunction	Inspect clutch components. Your dealer can perform this service.
Slow, easy clutch engagement	Use fast, aggressive throttle to engage clutch.

TROUBLESHOOTING (DET)

CAUSE OF DET ACTIVATION	SOLUTION
Poor quality fuel	Replace with higher quality fuel
Low fuel/no fuel in tank	Refuel with recommended fuel
Water in fuel	Replace with recommended fuel
Plugged fuel filter or tank pick-up sock	Your POLARIS dealer can perform service
Alcohol-based fuel additive used with Ethanol fuel	Do not add deicers or additives that contain any form of alcohol while using up to 10% Ethanol fuel
Improper engine modifications	Do not modify the engine

DIAGNOSTIC DISPLAY CODE DEFINITIONS

Open Load: There is a break in the wires that lead to the item listed in the chart (injector, fuel pump, etc.), or the item has failed.

Short-to-Ground: The wire is shorted to ground between the electronic control unit and the item listed in the chart.

Shorted Load: The wires leading to the item listed in the chart are shorted together, or the item has shorted internally.

Short-to-Battery: The wire leading from the item listed in the chart to the electronic control unit is shorted to a wire at battery voltage.

DIAGNOSTIC CODES			
COMPONENT	CONDITION	SPN	FMI
Throttle Position Sensor	Voltage Too High	51	3
	Voltage Too Low		4
	Abnormal Rate of Change		10
Vehicle Speed Sensor	Data Erratic, Intermittent or Missing	84	2
Intake Air Temperature Sensor	Voltage Too High	105	3
	Voltage Too Low		4
Barometric Pressure Sensor	Voltage Too High	108	3
	Voltage Too Low		4
Engine Temperature Sensor	Voltage Too High	110	3
	Voltage Too Low		4
	Temperature Too High		16
	Engine Overheat Shutdown		0
	Temperature Above Normal Range		15
Alternator Power Supply Potential (DC Chassis Voltage)	Voltage Too High	167	3
	Voltage Too Low		4
Exhaust Temperature Sensor	Voltage Too High	173	3
	Voltage Too Low		4
ECU Memory	Checksum/CRC Error	628	13
Injector 1 (MAG)	Driver Circuit Open/Grounded	651	5
	Driver Circuit Short to B+		3
Injector 2 (PTO)	Driver Circuit Open/Grounded	652	5
	Driver Circuit Short to B+		3
Knock Sensor 1	Voltage Too Low	731	4

TROUBLESHOOTING

DIAGNOSTIC CODES			
COMPONENT	CONDITION	SPN	FMI
Ignition Coil Primary Driver 1 (MAG)	Driver Circuit Open/Grounded	1268	5
Fuel Pump Driver Circuit	Driver Circuit Open/Grounded	1347	5
Knock Level Cylinder 1 (MAG)	Maximum Detonation Correction Limit Reached	1352	0
	Knock Above Critical Level		16
Knock Level Cylinder 2 (PTO)	Maximum Detonation Correction Limit Reached	1353	0
	Knock Above Critical Level		16
Sensor Supply Voltage 1 (TPS/TMAP Sensor Power)	Voltage Too Low	3509	4
Sensor Supply Voltage 2 (Ground Speed Sensor)	Voltage Too Low	3510	4
ECU Output Supply Voltage 2 (Injection Supply PWR)	Voltage Too High	3598	3
	Voltage Too Low		4
Throttle Release Signal	Voltage Too High	520194	3
	Voltage Too Low		4
	Throttle Stuck		7
Chassis Relay	Driver Circuit Open/Grounded	520208	5
	Driver Circuit Short to B+		3
Exhaust Valve Solenoid (600 Only)	Driver Circuit Grounded	520215	5
	Driver Circuit Short to B+		3
EV Actuator Driver (Controller) (800 H.O. Only)	Voltage Too High	520324	3
	Voltage Too Low		4
	Learn Failure		13
	Hardware Failure		12
	Commanded Pos. Not Achieved		7

DIAGNOSTIC CODES			
COMPONENT	CONDITION	SPN	FMI
	PWM Set Missing		2
	MAX Temperature Exceeded	520334	31
	Signal Out of Range - Valve Open	520325	31
	Signal Out of Range - Valve Mid	520326	31
	Signal Out of Range - Valve Closed	520327	31
	Short to Battery Voltage	520335	3
	Short to Ground		4
	Abnormal Transition		10
Electronic Oil Pump	Driver Circuit Open / Grounded	3589	4
	Driver Circuit Grounded		5
Oil Pump or Fuel Injector Settings not Programmed	Out of Calibration	520241	13

WARRANTY

SERVICE AND WARRANTY INFORMATION

OBTAINING SERVICE AND WARRANTY ASSISTANCE

Read and understand the service data and the POLARIS warranty information contained in this manual. Contact your POLARIS dealer for replacement parts, service or warranty. Your dealer receives frequent updates on changes, modifications and tips on snowmobile maintenance, which may supersede information contained in this manual. Your dealer is also familiar with POLARIS policies and procedures and will be happy to assist you.

When contacting us about parts, service, or warranty, always provide the following information:

1. Serial number
2. Model number
3. Dealer name
4. Date of purchase
5. Details of trouble experienced
6. Length of time and conditions of operation
7. Previous correspondence

Use the page provided near the front of your owner's manual to record the identification numbers of your snowmobile and its engine.

POLARIS CUSTOMER SERVICE

United States & Canada: 1-800-POLARIS (1-800-765-2747)

French: 1-800-268-6334

WARRANTY

LIMITED WARRANTY

POLARIS Industries Inc., 2100 Highway 55, Medina, MN 55340 (POLARIS) gives a 12 MONTH LIMITED WARRANTY on all components of your POLARIS vehicle against defects in material or workmanship. This warranty covers parts and labor charges for repair or replacement of defective parts and begins on the date of purchase by the original retail purchaser. This warranty is transferable to another owner during the warranty period through a POLARIS dealer, but any such transfer will not extend the original term of the warranty. The duration of this warranty may vary by international region based upon local laws and regulations.

THIS WARRANTY MAY BE VOIDED BY ANY UNAPPROVED MODIFICATIONS TO THIS VEHICLE THAT AFFECT POWERTRAIN, EXHAUST, CHASSIS OR SUSPENSION.

Promotional warranties are sometimes offered by POLARIS, including but not limited to:

- Two-year extended engine coverage
- Two-year powertrain coverage
- Extended service contract

See your dealer for details and separate terms and conditions for any promotional warranties.

REGISTRATION

At the time of sale, the Warranty Registration Form must be completed by your dealer and submitted to POLARIS within ten days of purchase. Upon receipt of this registration, POLARIS will record the registration for warranty. No verification of registration will be sent to the purchaser as the copy of the Warranty Registration Form will be your proof of warranty coverage. If you have not signed the original registration and received the customer copy, please contact your dealer immediately. **NO WARRANTY COVERAGE WILL BE ALLOWED UNLESS YOUR VEHICLE IS REGISTERED WITH POLARIS.** Initial dealer preparation and set-up of your vehicle is very important in ensuring trouble-free operation. Purchasing a machine in the crate or without proper dealer set-up will void your warranty coverage.

WARRANTY COVERAGE AND EXCLUSIONS

LIMITATIONS OF WARRANTIES AND REMEDIES

This POLARIS Limited Warranty excludes any failures that are not caused by a defect in material or workmanship. THIS WARRANTY DOES NOT COVER CLAIMS OF DEFECTIVE DESIGN. This warranty also does not cover acts of God, accidental damage, normal wear and tear, abuse or improper handling. This warranty also does not cover any vehicle, component or part that has been altered structurally, modified, neglected, improperly maintained or used for racing, competition or purposes other than for which it was designed.

This warranty also excludes failures resulting from improper lubrication; improper engine timing; improper fuel; surface imperfections caused by external stress, heat, cold or contamination; operator error or abuse; improper component alignment, tension, adjustment or altitude compensation; failure due to snow, water, dirt or other foreign substance ingestion/contamination; improper maintenance; modified components; use of aftermarket components; unauthorized repairs; repairs made after the warranty period expires or by an unauthorized repair center; use of the product in competition or for commercial purposes. Warranty will not apply to any product which has been damaged by abuse, accident, fire or any other casualty not determined a defect of materials or workmanship.

This warranty excludes damages or failures caused by abuse, accident, fire or any other cause other than a defect in materials or workmanship and provides no coverage for consumable components, general wear items or any parts exposed to friction surfaces, stresses, environmental conditions and/or contamination for which they were not designed or not intended, including but not limited to the following items:

Skis	Ski wear rods
Tracks	Slide rails
Suspension components	Finished and unfinished surfaces
Brake components	Carburetor/Throttle body components
Seat components	Engine components
Clutches and components	Drive belts
Steering components	Hydraulic components
Batteries	Circuit breakers/Fuses
Light bulbs/Sealed beam lamps	Electronic components
Idler wheels	Spark Plugs
Sealants	Lubricants
Coolant	Filters
Fuel	

WARRANTY

LUBRICANTS AND FLUIDS

1. Mixing oil brands or using non-recommended oil may cause engine damage. We recommend the use of POLARIS engine oil.

2. Damage or failure resulting from the use of non-recommended lubricants or fluids is not covered by this warranty.

This warranty provides no coverage for personal loss or expense, including mileage, transportation costs, hotels, meals, shipping or handling fees, product pick-up or delivery, replacement rentals, loss of product use, loss of profits, or loss of vacation or personal time.

THE EXCLUSIVE REMEDY FOR BREACH OF THIS WARRANTY SHALL BE, AT POLARIS' OPTION, REPAIR OR REPLACEMENT OF ANY DEFECTIVE MATERIALS, COMPONENTS, OR PRODUCTS. THE REMEDIES SET FORTH IN THIS WARRANTY ARE THE ONLY REMEDIES AVAILABLE TO ANY PERSON FOR BREACH OF THIS WARRANTY. POLARIS SHALL HAVE NO LIABILITY TO ANY PERSON FOR INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES OF ANY DESCRIPTION, WHETHER ARISING OUT OF EXPRESS OR IMPLIED WARRANTY OR ANY OTHER CONTRACT, NEGLIGENCE, OR OTHER TORT OR OTHERWISE. THIS EXCLUSION OF CONSEQUENTIAL, INCIDENTAL AND SPECIAL DAMAGES IS INDEPENDENT FROM AND SHALL SURVIVE ANY FINDING THAT THE EXCLUSIVE REMEDY FAILED OF ITS ESSENTIAL PURPOSE.

THE IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE IS EXCLUDED FROM THIS LIMITED WARRANTY. ALL OTHER IMPLIED WARRANTIES (INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTY OF MERCHANTABILITY) ARE LIMITED IN DURATION TO THE ABOVE 12 MONTH WARRANTY PERIOD. POLARIS DISCLAIMS ALL EXPRESS WARRANTIES NOT STATED IN THIS WARRANTY. SOME STATES DO NOT PERMIT THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES OR ALLOW LIMITATIONS ON THE DURATION OF IMPLIED WARRANTIES, SO THE ABOVE LIMITATIONS MAY NOT APPLY TO YOU IF INCONSISTENT WITH CONTROLLING STATE LAW.

HOW TO OBTAIN WARRANTY SERVICE

If your vehicle requires warranty service, you must take it to a POLARIS Servicing Dealer. When requesting warranty service you must present your copy of the Warranty Registration Form to the dealer. (THE COST OF TRANSPORTATION TO AND FROM THE DEALER IS YOUR RESPONSIBILITY.) POLARIS suggests that you use your original selling dealer; however, you may use any POLARIS Servicing Dealer to perform warranty service.

IN THE COUNTRY WHERE YOUR PRODUCT WAS PURCHASED:

Warranty or service bulletin repairs must be done by an authorized POLARIS dealer. If you move or are traveling within the country where your product was purchased, warranty and service bulletin repairs may be requested from any authorized POLARIS dealer that sells the same line as your product.

OUTSIDE THE COUNTRY WHERE YOUR PRODUCT WAS PURCHASED:

If you are traveling temporarily outside the country where your product was purchased, you should take your product to an authorized POLARIS dealer. You must show the dealer photo identification from the country of the selling dealer's authorized location as proof of residence. Upon residence verification, the servicing dealer will be authorized to perform the warranty repair.

IF YOU MOVE:

If you move to another country, be sure to contact POLARIS Customer Assistance and the customs department of the destination country before you move. Product importation rules vary considerably from country to country. You may be required to present documentation of your move to POLARIS in order to continue your warranty coverage. You may also be required to obtain documentation from POLARIS in order to register your product in your new country. You should warranty register your product at a local POLARIS dealer in your new country immediately after you move to continue your warranty coverage and to ensure that you receive information and notices regarding your vehicle.

IF YOU PURCHASE FROM A PRIVATE PARTY:

If you purchase a POLARIS product from a private party, to be kept and used outside of the country in which the product was originally purchased, all warranty coverage will be denied. You must nonetheless register your product under your name and address with a local POLARIS dealer in your country to ensure that you receive safety information and notices regarding your product.

WARRANTY

EXPORTED PRODUCTS

EXCEPT WHERE SPECIFICALLY REQUIRED BY LAW, THERE IS NO WARRANTY OR SERVICE BULLETIN COVERAGE ON THIS PRODUCT IF IT IS SOLD OUTSIDE THE COUNTRY OF THE SELLING DEALER'S AUTHORIZED LOCATION. This policy does not apply to products that have received authorization for export from POLARIS. Dealers may not give authorization for export. You should consult an authorized dealer to determine this product's warranty or service coverage if you have any questions. This policy does not apply to products registered to government officials or military personnel on assignment outside the country of the selling dealer's authorized location. This policy does not apply to safety bulletins.

NOTICE

If your product is registered outside of the country where it was purchased and you have not followed the procedure set above, your product will no longer be eligible for warranty or service bulletin coverage of any kind, other than safety bulletins. Products registered to Government officials or military personnel on assignment outside of the country where the product was purchased will continue to be covered by the Limited Warranty.

Please work with your dealer to resolve any warranty issues. Should your dealer require any additional assistance, they will contact the appropriate person at POLARIS.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state or in different countries. If any of the above terms are void because of federal, state, local law, all other warranty terms will remain in effect.

For questions call POLARIS Customer Assistance:

United States & Canada: 1-800-POLARIS (1-800-765-2747)

French: 1-800-268-6334

U.S.A. EPA EMISSIONS LIMITED WARRANTY

This Emissions Limited Warranty is in addition to the POLARIS standard Limited Warranty for your vehicle. POLARIS Industries Inc. warrants that at the time it is first purchased, this emissions-certified vehicle is designed, built and equipped so it conforms with applicable U.S. Environmental Protection Agency emission regulations. POLARIS warrants that the vehicle is free from defects in materials and workmanship that would cause it to fail to meet these regulations.

The warranty period for this emissions-certified vehicle starts on the date the vehicle is first purchased and continues for a period of 200 hours of engine operation; 4,000 kilometers (2,485 miles) of vehicle travel; or 30 calendar months from the date of purchase, whichever comes first.

This Emissions Limited Warranty covers components if their failure increases the vehicle's regulated emissions, and it covers components of systems if their only purpose is to control emissions. Repairing or replacing other components not covered by this warranty is the responsibility of the vehicle owner. This Emissions Limited Warranty does not cover components if their failure does not increase the vehicle's regulated emissions.

For exhaust emissions, emission-related components include any engine parts related to the following systems:

- Air-induction system
- Fuel system
- Ignition system
- Exhaust gas recirculation systems

The following parts are also considered emission-related components for exhaust emissions:

- Aftertreatment devices
- Crankcase ventilation valves
- Sensors
- Electronic control units

WARRANTY

The following parts are considered emission-related components for evaporative emissions:

- Fuel Tank
- Fuel Cap
- Fuel Line
- Fuel Line Fittings
- Clamps*
- Pressure Relief Valves*
- Control Valves*
- Control Solenoids*
- Electronic Controls*
- Vacuum Control Diaphragms*
- Control Cables*
- Control Linkages*
- Purge Valves
- Vapor Hoses
- Liquid/Vapor Separator
- Carbon Canister
- Canister Mounting Brackets
- Carburetor Purge Port Connector

*As related to the evaporative emission control system.

The exclusive remedy for breach of this Limited Warranty shall be, at the exclusive option of POLARIS, repair or replacement of any defective materials, components or products. THE REMEDIES SET FORTH IN THIS LIMITED WARRANTY ARE THE ONLY REMEDIES AVAILABLE TO ANY PERSON FOR BREACH OF THIS WARRANTY. POLARIS SHALL HAVE NO LIABILITY TO ANY PERSON FOR INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES OF ANY DESCRIPTION, WHETHER ARISING OUT OF EXPRESS OR IMPLIED WARRANTY OR ANY OTHER CONTRACT, NEGLIGENCE OR OTHER TORT OR OTHERWISE. THIS EXCLUSION OF CONSEQUENTIAL, INCIDENTAL, AND SPECIAL DAMAGES IS INDEPENDENT FROM AND SHALL SURVIVE ANY FINDING THAT THE EXCLUSIVE REMEDY FAILED OF ITS ESSENTIAL PURPOSE.

ALL IMPLIED WARRANTIES (INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE) ARE LIMITED IN DURATION TO THE WARRANTY PERIOD DESCRIBED HEREIN. POLARIS DISCLAIMS ALL EXPRESS WARRANTIES NOT STATED IN THIS WARRANTY. Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply if it is inconsistent with the controlling state law.

This Limited Warranty excludes failures not caused by a defect in material or workmanship. This Limited Warranty does not cover damage due to accidents, abuse or improper handling, maintenance or use. This Limited Warranty also does not cover any engine that has been structurally altered, or when the vehicle has been used in racing competition. This Limited Warranty also does not cover physical damage, corrosion or defects caused by fire, explosions or other similar causes beyond the control of POLARIS.

Owners are responsible for performing the scheduled maintenance identified in the owner's manual. POLARIS may deny warranty claims for failures that have been caused by the owner's or operator's improper maintenance or use, by accidents for which POLARIS has no responsibility, or by acts of God.

Any qualified repair shop or person may maintain, replace, or repair the emission control devices or systems on your vehicle. POLARIS recommends that you contact an authorized POLARIS dealer to perform any service that may be necessary for your vehicle. POLARIS also recommends that you use only POLARIS parts. It is a potential violation of the Clean Air Act if a part supplied by an aftermarket parts manufacturer reduces the effectiveness of the vehicle's emission controls. Tampering with emission controls is prohibited by federal law.

If you have any questions regarding your warranty rights and responsibilities, please contact POLARIS Customer Assistance:

United States & Canada: 1-800-POLARIS (1-800-765-2747)

French: 1-800-268-6334

MAINTENANCE LOG

MAINTENANCE LOG

Present this section of your manual to your dealer each time your snowmobile is serviced. This will provide you and future owners with an accurate log of maintenance and services performed on the snowmobile.

DATE	MILES (KM)	TECHNICIAN	SERVICE PERFORMED / COMMENTS
	150 mi. (240 km)		
	500 mi (800 km)		
	1000 mi (1600 km)		
	2000 mi (3200 km)		

MAINTENANCE LOG

DATE	HOURS	TECHNICIAN	SERVICE PERFORMED / COMMENTS

12-Volt DC Power Receptacle	34
12-Volt RCA Power Sources	34

A

Air Pollution	8
Avalanche Awareness	20
Avalanche Danger Scale	16
Avalanches	16

B

Battery	
Charging	131
Installation	129
Removal	128
Storage	131
Battery/Electrical System	
Storage	135
Before Starting the Engine	83
Belt Break-In	89
Bleeding Hydraulic Brake	
System	116
Brake Inspection	114
Brake pads	114
Brakes	83, 114
Brake Fluid	115
Components	114
Inspection	114
Lever Travel	115
System Bleeding	116
Break-In Period	88

C

Carbide Skags	79
Chaincase	135
Chaincase Oil	103
Clutch Alignment Offset	118
Clutch Safety	24
Clutch System	117
Clutch Warning	28
Clutching Chart	
600 INDY SP	145
600 INDY XC	139

800 INDY XC	142
Cold Weather Drive-Away	24
Component Locations	31
Constant Power Fuse	117
Coolant	110
Coolant Level	110
Cooling System	110
Cooling System, Bleeding	111
Cooling System, Flushing	111

D

Detonation Elimination	
Technology (DET)	37, 154
Diagnostic Display Codes	154
Diagnostic Display Mode	60
Disabled Operators	16
Display, Standard/Metric	47
Drive Belt	
Adjustment	118
Condition	118
Deflection	118
Installation	119
Removal	119
Safety	24
Drive Belt Break-In	89
Drive Belt Deflection	118
Drive Belt Storage	134
Drive Chain Tension	113
Driver Awareness	15
Driving Downhill	23
Driving in Hilly Terrain	23
Driving on Slippery Surfaces	22
Driving Responsibly	25

E

Emission Control Information	97
Emission Control Label	97
Emission Control Maintenance	
Requirements	97
Engine Break-In	88
Engine Overheating	38, 63
Engine Restarting	87
Engine Serial Number	10
Engine Starting	87

INDEX

Engine Stop Switch	86, 93
Engine Stop Switch Alignment	77
Engine-Cooling Actions	39, 64
Environment Preservation	8
Exhaust System	113
Exported Products	164
Extended Idle Engine Shutoff	39

F

Fasteners, Hood and Side Panel...	86
Fluid Change	
Chaincase	104
Fluid Change, Chaincase	103
Fluid Change:Coolant	111
Fluid Level	
Brake Fluid	115
Chaincase	103
Coolant	110
Fogging the Engine	134
Front (IFS) Shock Adjustments	70
Front Suspension Inspection	124
Front Track Shock Factory	
Spring Settings	69
Fuel	91
Fuel Filter	108
Fuel Lines	108
Fuel Premix (Initial Fill)	88
Fuel Pump	107
Fuel Recommendation	91
Fuel System Deicers	92
Fuel Type Selection	62-63
Fuse Replacement	117

H

Hand Control Alignment	
Throttle	77
Hand Control Alignment, Left	75
Hand Control Alignment, Stop	
Switch	77
Handlebar Angle	73
Handlebar Component	
Fasteners	72
Handlebar Components	76
Headlight Adjustment	35

Helmet	13
Hood Access	106
Hood Fasteners	86
Hood Latches	86

I

IFS Shock Factory Clicker	
Settings	70
IFS Shock Spring Settings	70
Ignition Lock System	48
Ignition Switch	33, 86
Inadequate Snow Conditions	22
Indicator Lamps	42
Information Display Area	44
Inspection, Pre-Ride	81
Instrument Cluster	41
Instrument Cluster, PIDD	61
Intake Filters	107
Intake Silencer	24
Interactive Digital Display	
(PIDD)	61

K

Key Identification	10
--------------------------	----

L

Lighting	86
Lights	117
Limited Warranty	160
Locking System With Personal	
Security Code	54
Lubricate the Pivots	136
Lubrication	102
Lubrication, Rear Suspension	102

M

Maintenance	
Periodic Chart	99
Maintenance Log	169
Maintenance Recommendations...	11

Maneuverability.....	24
Metric/Standard Display	47
Mirrors	86
Mountainous Terrain Riding	16

N

Noise	8
Non-ionizing Radiation.....	97
Notice	164

O

Odometer/Engine Hour Display	
Area	44
Oil Change, Chaincase	103-104
Oil Injection System	89
Oil Level	92
Oil Level, Chaincase	103
Oil Level, Injection	92
Oil Lines	106
Oil Pump Failure Protection	37
Oil Recommendations	88
Operating Area	86
Operating in Deep Snow	22
Operation Warning.....	29
Operator Safety.....	11-12
Overheating, Engine	38, 63

P

Parking Brake Lever Lock.....	84
Playback Function	45
Pre-Ride Checklist	81
Pre-Ride Suspension Inspection ...	82

R

Rail Slide Wear	127
Rear Track Shock Adjustments.....	67
Rear Track Shock Factory	
Clicker Settings	68
Recoil Rope	86
Recoil Rope Inspection	86

Recommended Maintenance	98
Registration.....	160
Restarting	87
Reverse Operation.....	94-95
Reverse Warning.....	27
Rider Capacity	12
Rider Information Center	43
Riding Apparel	13-14
Riding Position.....	12
Riser Angle	74

S

Safety Labels.....	27
Safety Symbols	4
Security System	48
Shock Compression Damping	66
Shock Locations.....	66
Side Panel Access.....	106
Signal Words	4
Skags, Carbide	79
Ski Alignment	125
Ski Skags	126
Slide Rail and Track Cooling	90
Snow Conditions	22
Spark Plug Condition.....	110
Spark Plug Inspection.....	109
Spark Plug Recommendations ...	108
Spark Plugs.....	108
Specifications	
600 INDY SP	145
600 INDY XC	139
800 INDY XC	142
Speed Display	44
Spindle bolts.....	82
Standard/Metric Display	47
Starting the Engine	87
Steering System.....	123-124
Steering System Inspection	85
Steering/Suspension Maintenance	
Adjustable Riser	74
Stopping, Emergency	95
Storage, Daily	96
Studs	78
Survival Preparation.....	14
Suspension Inspection, Pre-	
Ride	82

INDEX

Suspension Lubrication, Rear	102
Suspension mounting bolts	82
Suspension Quick Set-Up Guide	65-66, 69-70
Switches	
Engine Stop Switch	93
Ignition Switch	33, 86
Mode/Select Buttons	41, 61
Mode/Set Switch	41, 61
Tether Switch	86
Throttle Safety Switch	83, 93

T

Temperature Charts	26
Tether Switch	86
Throttle Block Alignment	77
Throttle Lever	83, 92
Throttle Lever Inspection	83
Throttle Safety Switch	93
Throttle Safety Switch Inspection	83
Tools	36
Towing	96
Track	
Alignment	122
Inspection	120
Lubrication	121
Tension	121
Track Inspection	85
Track Maintenance	120
Track Studding	78
Track Tension Data Chart	121
Track Warm-Up	90
Track Warning	28
Transporting the Snowmobile	132
Treating the Fuel System	133
Troubleshooting, Drive Belt	153
Troubleshooting, Engine	149
Troubleshooting, Suspension	152
Tune-Up	132

U

Unlocking System With Personal Security Code	57
---	----

V

Vehicle Identification Numbers	9
--------------------------------------	---

W

Warning Symbols	4
Windchill Charts	26
Winter Ride Preparation	137



*For your nearest Polaris dealer,
call 1-800-POLARIS (765-2747)
or visit www.polaris.com*

*Polaris Industries Inc.
2100 Highway 55
Medina, MN 55340*

*Part No. 9928880 Rev 02
Printed in USA*

